
MILITARY SPECIFICATION SHEET

FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; PLUG, PIPE


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the plugs described herein shall consist of this specification and the latest issue of MIL-F-1183.

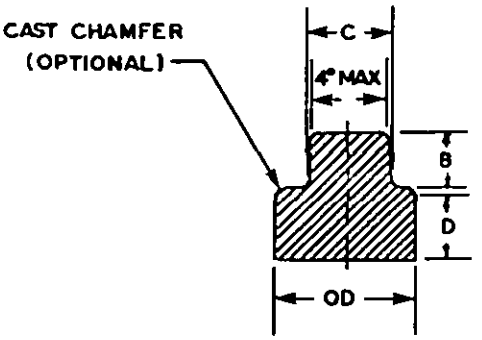

SH 12172

FIGURE 1. Solid pattern.

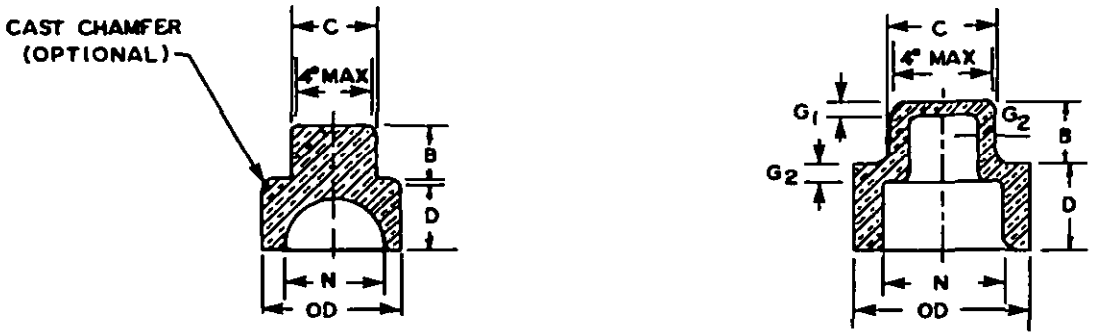

SH 12173

FIGURE 2. Cored pattern (both designs approved).

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:49Z
Check the source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

TABLE I. Dimensions of square-head plugs.

Nominal pipe size	B	C 1/ 2/		D		G_1	G_2	N	Outside diameter	
	Height square, minimum	Across flats		Plug length		Metal thickness		Inside diameter (maximum)		
		Nominal	Maximum	Minimum	Maximum	Top (minimum)	Sides of face (minimum)		Minimum	Maximum
Inches	Inches	Inches	Inches	Inches	Inches	Inch	Inch	Inches	Inches	Inches
1/4	0.28	3/8	0.375	0.30	0.41	---	---	---	0.537	0.540
3/8	.31	7/16	.438	.34	.41	---	---	---	.672	.675
1/2	.38	9/16	.563	.41	.54	0.09	0.12	0.53	.837	.840
3/4	.44	5/8	.625	.44	.55	.10	.13	.72	1.047	1.050
1	.50	13/16	.813	.47	.69	.11	.14	.93	1.312	1.315
1-1/4	.56	15/16	.938	.53	.71	.12	.15	1.25	1.657	1.660
1-1/2	.62	1-1/8	1.125	.66	.73	.13	.16	1.47	1.897	1.900
2	.68	1-5/16	1.313	.69	.76	.15	.17	1.91	2.372	2.375
2-1/2	.74	1-1/2	1.500	.84	1.07	.17	.18	2.32	2.872	2.875
3	.80	1-11/16	1.688	.89	1.13	.19	.19	2.90	3.497	3.500
3-1/2	.86	1-7/8	1.875	.94	1.18	.20	.20	2.36	3.997	4.000
4	.92	2-1/4	2.250	.97	1.22	.22	.22	3.83	4.497	4.500
5	.98	2-3/4	2.750	1.06	1.44	.24	.24	4.30	5.560	5.568
6	1.05	3-1/2	3.500	1.17	1.50	.30	.30	5.38	6.621	6.625

1/ Square head of plug shall fit these minimum wrench openings.
2/ Maximum total taper of opposite sides of head shall be 4 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Plug type. Plugs shall be type B (interior not streamlined).
2. Plug configuration. Plugs shall be provided in either the cored pattern or the solid pattern. The solid pattern plugs shall be provided in 3/8 nominal pipe size maximum and not be required to be air tested. For either configuration the side and top wall thicknesses shall be not less than that given in table I for the required nominal pipe size. Since plugs are configured to fit into socket ends, plugs do not have brazing ring grooves.
3. Plug dimensions. Plug dimensions shall be as specified in table I.
4. Specification sheet part number. Plugs covered by this specification sheet shall be designated in the following form (see 6.2(b) of MIL-F-1183).

M1183/7 - XX

Specification sheet code number
Nominal pipe size code number (see requirement 5 herein)

5. Nominal pipe size. The nominal pipe size is identified by two digits (see table II).

TABLE II. Code number to pipe size.

Code number	Nominal pipe size
01	1/4
02	3/8
03	1/2
04	3/4
05	1
06	1-1/4
07	1-1/2
08	2
09	2-1/2
10	3
11	3-1/2
12	4
13	5
14	6

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:49Z
Check the source to verify that this is the current version before use.

6. Specification part number definition. The specification sheet part number is a definitive part number which is formed by combining the specification sheet code number (M1183/7 for MIL-F-1183/7) with a dash after it and the nominal pipe size code number as specified in requirement 4.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ME
Navy - SH
Air Force - 99

Review activity:
DLA - CS

Preparing activity:
Navy - SH

Agent:
DLA - CS

(Project 4730-0647)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:49Z
Check the source to verify that this is the current version before use.