INCH-POUND
MIL-DTL-1183/7B
20 December 2016
SUPERSEDING
MIL-F-1183/7A
5 May 1987

DETAIL SPECIFICATION SHEET

FITTINGS, PIPE, CAST BRONZE, SILVER-BRAZING; PLUG, PIPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-1183.

REQUIREMENTS:

1. Plug type. Plugs shall be Type B (interior not streamlined).

2. Plug configuration. Plugs shall be provided in either the solid pattern (see figure 1) or the cored pattern (see figure 2). The solid pattern plugs shall be provided in ⅜ nominal pipe size maximum and shall not be required to be air tested. For either configuration, the side and top wall thicknesses shall be not less than those given in table I for the required nominal pipe size. Since plugs are configured to fit into socket ends, plugs do not have brazing ring grooves.

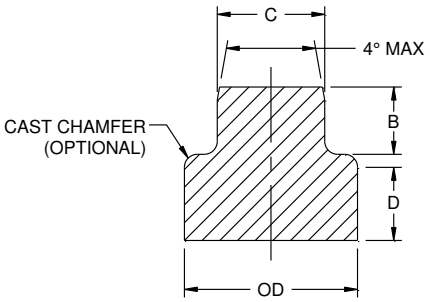


FIGURE 1. Solid pattern.

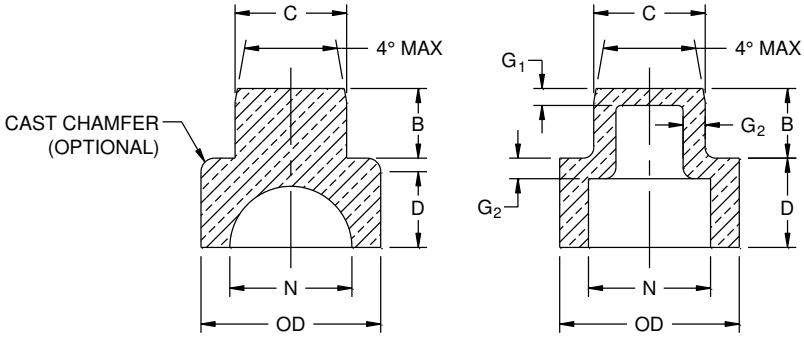


FIGURE 2. Cored pattern (both designs approved).

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:49Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions of square-head plugs, inches.

Nominal pipe size	B	C [1/ 2/]		D		G_1	G_2	N	Outside diameter	
	Height square, min	Across flats		Plug length		Metal thickness		Inside diameter (max)		
		Nominal	Max	Min	Max	Top (min)	Sides of face (min)		Min	Max
¼	0.28	⅜	0.375	0.30	0.41	----	----	----	0.537	0.540
⅜	0.31	7/16	0.438	0.34	0.41	----	----	----	0.672	0.675
½	0.38	9/16	0.563	0.41	0.54	0.09	0.12	0.53	0.837	0.840
¾	0.44	⅝	0.625	0.44	0.55	0.10	0.13	0.72	1.047	1.050
1	0.50	13/16	0.813	0.47	0.69	0.11	0.14	0.93	1.312	1.315
1¼	0.56	15/16	0.938	0.53	0.71	0.12	0.15	1.25	1.657	1.660
1½	0.62	1⅛	1.125	0.66	0.73	0.13	0.16	1.47	1.897	1.900
2	0.68	1 5/16	1.313	0.69	0.76	0.15	0.17	1.91	2.372	2.375
2½	0.74	1½	1.500	0.84	1.07	0.17	0.18	2.32	2.872	2.875
3	0.80	1 11/16	1.688	0.89	1.13	0.19	0.19	2.90	3.497	3.500
3½	0.86	1⅞	1.875	0.94	1.18	0.20	0.20	3.36	3.997	4.000
4	0.92	2¼	2.250	0.97	1.22	0.22	0.22	3.83	4.497	4.500
5	0.98	2¾	2.750	1.06	1.44	0.24	0.24	4.30	5.560	5.568
6	1.05	3½	3.500	1.17	1.50	0.30	0.30	5.38	6.621	6.625

NOTES:


1/ Square head of plug shall fit these minimum wrench openings.

2/ Maximum total taper of opposite sides of head shall be 4 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:49Z
Check the source to verify that this is the current version before use.

3. Plug dimensions. Plug dimensions shall be as specified in table I.

4. Specification sheet part number. The specification sheet part number is a definitive part number that is formed by combining the specification sheet code number (M1183/7 for MIL-DTL-1183/7) with a dash after it and the nominal pipe size code number. Plugs covered by this specification sheet shall be designated in the following form (see 6.2.b of MIL-DTL-1183):

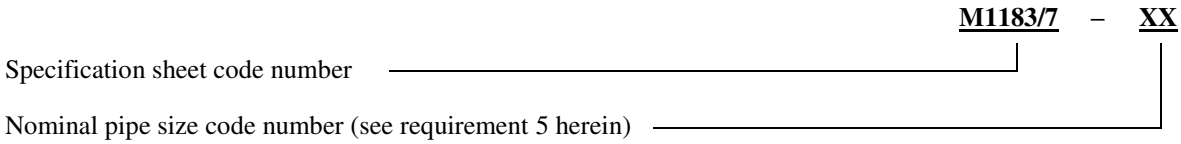

5. Nominal pipe size. The nominal pipe size is identified by two digits (see table II).

TABLE II. Code number to pipe size.

Code number	Nominal pipe size (inches)
01	¼
02	⅜
03	½
04	¾
05	1
06	1¼
07	1½
08	2
09	2½
10	3
11	3½
12	4
13	5
14	6

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:49Z
Check the source to verify that this is the current version before use.

Custodians:
Army – CR4
Navy – SH
Air Force – 99

Preparing activity:
Navy – SH
(Project 4730-2016-095)

Review activity:
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:49Z
Check the source to verify that this is the current version before use.