
FED. SUP CLASS
5340

MS 122196 THRU MS 122235

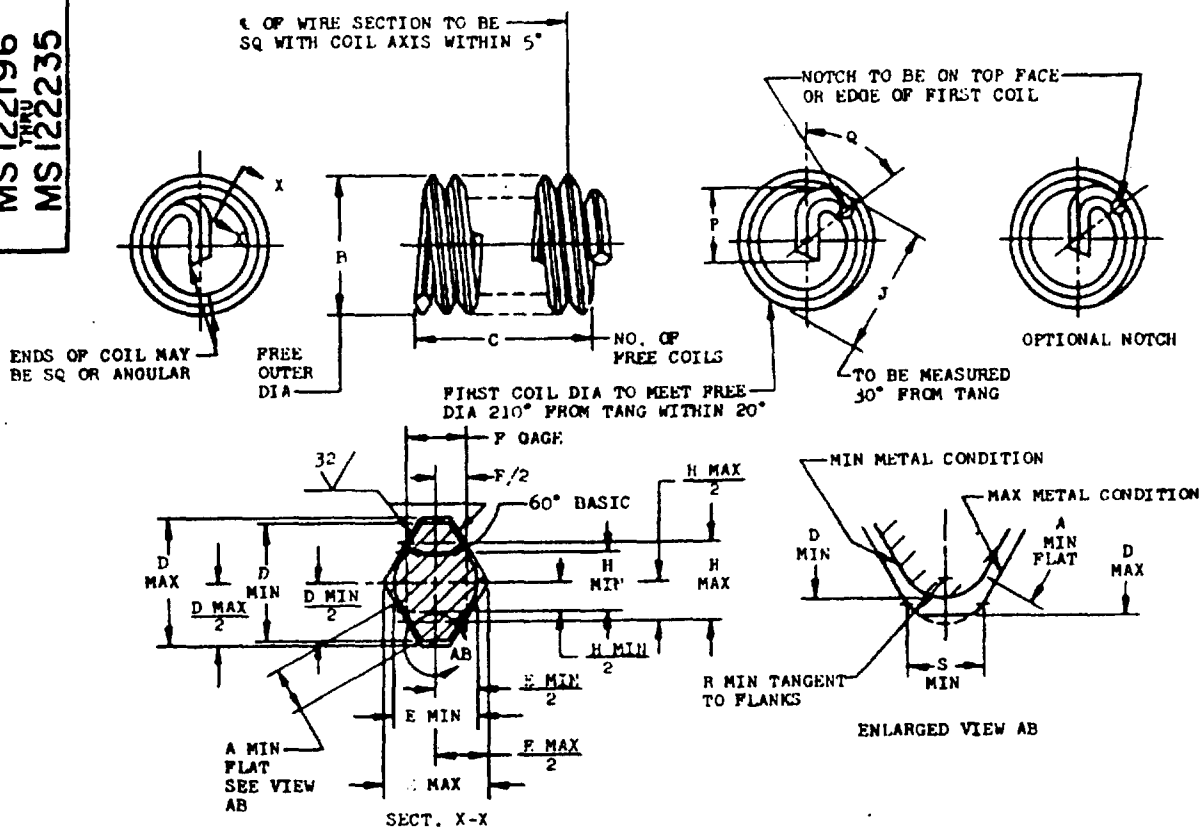

(D)

THREAD SIZE	** NOMINAL LENGTH	A MIN	B MIN	B MAX	C* ±.250 COIL	D MIN	D MAX	E MIN	E MAX	P GAGE	H MIN	H MAX
.086 -56	.215	.0027	.110	.119	9.625	.0163	.0193	.0126	.0156	.00893	.0112	.0116
.099 -46	.248	.0043	.128	.139	9.375	.0196	.0226	.0152	.0182	.01042	.01313	.01353
.112 -40	.280	.0068	.144	.159	8.875	.0241	.0271	.0189	.0219	.01250	.01584	.01624
.125 -40	.312	.0068	.158	.173	10.000	.0241	.0271	.0189	.0219	.01250	.01584	.01624
.138 -32	.345	.0076	.178	.193	8.875	.0295	.0338	.0233	.0273	.01563	.01985	.02030
.164 -32	.410	.0076	.205	.220	10.750	.0295	.0338	.0233	.0273	.01563	.01985	.02030
.190 -24	.475	.0120	.244	.259	9.250	.0410	.0449	.0305	.0365	.02083	.02656	.02706
.250 -20	.625	.0164	.310	.330	10.375	.0500	.0540	.0378	.0438	.02500	.03198	.03248
.3125-18	.781	.0176	.380	.400	11.875	.0560	.0600	.0416	.0486	.02778	.03558	.03608
.375 -16	.938	.0215	.452	.472	12.875	.0636	.0677	.0477	.0547	.03125	.04009	.04059
.4375-14	1.094	.0267	.526	.551	13.125	.0730	.0770	.0545	.0625	.03571	.04589	.04639
.500 -13	1.250	.0273	.597	.622	14.125	.0758	.0829	.0593	.0673	.03846	.04946	.04996
.5625-12	1.406	.0334	.669	.694	14.750	.0861	.0900	.0649	.0729	.04167	.05363	.05413
.625 -11	1.562	.0351	.742	.767	15.000	.0909	.0980	.0715	.0795	.04545	.05855	.05905
.750 -10	1.875	.0402	.881	.906	16.500	.1007	.1079	.0795	.0875	.05000	.06445	.06495
.875 -9	2.188	.0466	1.022	1.052	17.500	.1124	.1199	.0892	.0972	.05556	.07167	.07217
1.000 -8	2.500	.0544	1.166	1.196	17.750	.1264	.1350	.1004	.1094	.06250	.08069	.08119
1.125 -7	2.812	.0645	1.315	1.355	17.500	.1451	.1546	.1160	.1250	.07143	.09229	.09279
1.250 -7	3.125	.0645	1.443	1.483	19.500	.1451	.1546	.1160	.1250	.07143	.09229	.09279
1.375 -6	3.438	.0775	1.598	1.643	18.375	.1695	.1799	.1368	.1458	.08333	.10775	.10825
1.500 -6	3.750	.0775	1.727	1.772	20.125	.1695	.1799	.1368	.1458	.08333	.10775	.10825

(D) FOR CHANGES SEE SHEETS 1 AND 2.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

P.A. USAF - 11 Other Cust Army - AV Navy - AS	TITLE: INSERT, [illegible]RES HELICAL COIL COARSE THREAD, 2-1/2 DIA NOMINAL LENGTH	MILITARY STANDARD MS 122196 THRU 122235	
PROCUREMENT SPECIFICATION: MIL-I-8846	SUPERSEDES: MS21208 IN PART	SHEET 1 OF 2	

Project No. 5340-2002

APPROVED 29 May 53 REVISED (A) 26 May 59 (B) 24 Oct 66 (C) 15 Oct 69 (D) 24 Feb 76

User: Army - EL, ME, MI, MU
Navy - MC, OS
Air Force

Review activities: Army - WC
Navy -
Air Force - 82

This standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5340

THREAD SIZE	J MIN	J MAX	P MIN	P MAX	Q	R MIN	S MIN	APPROX WEIGHT LB/100	PART NUMBERS NOTCHED	PART NUMBERS UNNOTCHED(a)
.086 -56	.103	.111	.062	.080	75° -150°	.0032	.0056	.015	MS122215	
.099 -48	.120	.131	.070	.090	75° -150°	.0038	.0065	.0224	MS122235	
.112 -40			.070	.095	25° -100°	.0045	.0078	.0348	MS122196	MS122216
.125 -40			.078	.108	25° -100°	.0045	.0078	.0440	MS122197	MS122217
.138 -32			.091	.121	25° -100°	.0056	.0098	.0666	MS122198	MS122218
.164 -32			.118	.153	20° -100°	.0056	.0098	.1008	MS122199	MS122219
.190 -24			.141	.176	15° - 90°	.0075	.0130	.172	MS122200	MS122220
.250 -20			.182	.233	20° - 80°	.0090	.0156	.385	MS122201	MS122221
.3125-18	.375	.390	.214	.286	20° - 80°	.0100	.0174	.658	MS122202	MS122222
.375 -16	.445	.462	.269	.348	20° - 80°	.0113	.0195	1.064	MS122203	MS122223
.4375-14	.518	.536	.313	.411	20° - 80°	.0129	.0223	1.667	MS122204	MS122224
.500 -13	.586	.606	.348	.458	20° - 80°	.0139	.0240	2.273	MS122205	MS122225
.5625-12	.656	.676	.390	.520	20° - 80°	.0150	.0260	3.226	MS122206	MS122226
.625 -11	.727	.747	.421	.567	20° - 80°	.0164	.0284	4.348	MS122207	MS122227
.750 -10	.840	.885	.453	.640	60° -120°	.0180	.0312	6.667	MS122208	MS122228
.875 -9	.991	1.026	.500	.734	60° -120°	.0200	.0347	10.000	MS122209	MS122229
1.000 -8	1.135	1.170	.526	.781	60° -120°	.0226	.0391	14.286	MS122210	MS122230
1.125 -7	1.260	1.315	.557	.843	60° -120°	.0258	.0446	20.000	MS122211	MS122231
1.250 -7	1.366	1.416	.679	.937	60° -120°	.0258	.0446	27.236	MS122212	MS122232
1.375 -6	1.545	1.598	.689	1.093	60° -120°	.0301	.0521	37.981	MS122213	MS122233
1.500 -6	1.676	1.727	.811	1.187	60° -120°	.0301	.0521	45.620	MS122214	MS122234

** 1. NOMINAL LENGTH EQUALS BASIC THICKNESS OF PLATE FOR INSERT ASSEMBLY.
2. ASSEMBLED LENGTH OF INSERT TO BE AS SPECIFIED ON MS33537.
(D) * 3. NUMBER OF FREE COILS TO BE COUNTED AND ASSEMBLED LENGTH OF INSERT TO BE MEASURED 90° FROM TANG.
4. MATERIAL: STEEL, CORROSION RESISTANT, AMS 7245 (MATERIAL AND MPG).
5. SURFACE TEXTURE: ANSI B46.1-1962.
6. INSERT, WHEN ASSEMBLED IN TAPPED HOLE AS SPECIFIED IN MS33537, SHALL PRODUCE A FINISHED THD MEETING ALL REQUIREMENTS OF MIL-S-7742 AND SHALL ACCEPT EXTERNAL MIL-S-8879 THREADS.
7. DIMENSIONS IN INCHES.
8. IDENTIFICATION: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION ON CONTAINER.
9. DO NOT USE UNASSIGNED PART NUMBERS.
(a) UNNOTCHED INSERTS INACTIVE FOR DESIGN AFTER 15 OCT 1969. USE NOTCHED INSERTS. NOTCHED INSERTS CAN UNIVERSALLY REPLACE THE INACTIVATED INSERTS, BUT THE INACTIVATED INSERTS CANNOT REPLACE THE SUPERSEDING NOTCHED INSERTS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 29 May 53 REVISED (A) 26 May 59 (B) 24 Oct 66 (D) FOR CHANGES SEE SHEETS 1 AND 2.

User: Army-EL, ME, MI, MU
Navy-MC, OS
Air Force-

Review activities: Army-WC
Navy-
Air Force-82

This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.		TITLE	MILITARY STANDARD
Other Cust	USAF - 11 Army - AV Navy - AS	INSERT, CRES HELICAL COIL COARSE THREAD, 2-1/2 DIA NOMINAL LENGTH	MS 122196 THRU 122235
PROCUREMENT SPECIFICATION: MIL-I-8846		SUPERSEDES: MS21208 IN PART	SHEET 2 OF 2

* U.S. GOVERNMENT PRINTING OFFICE: 1976--603 766/3408

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.