
FED. SUP CLASS
5340

MS124691 thru MS124730

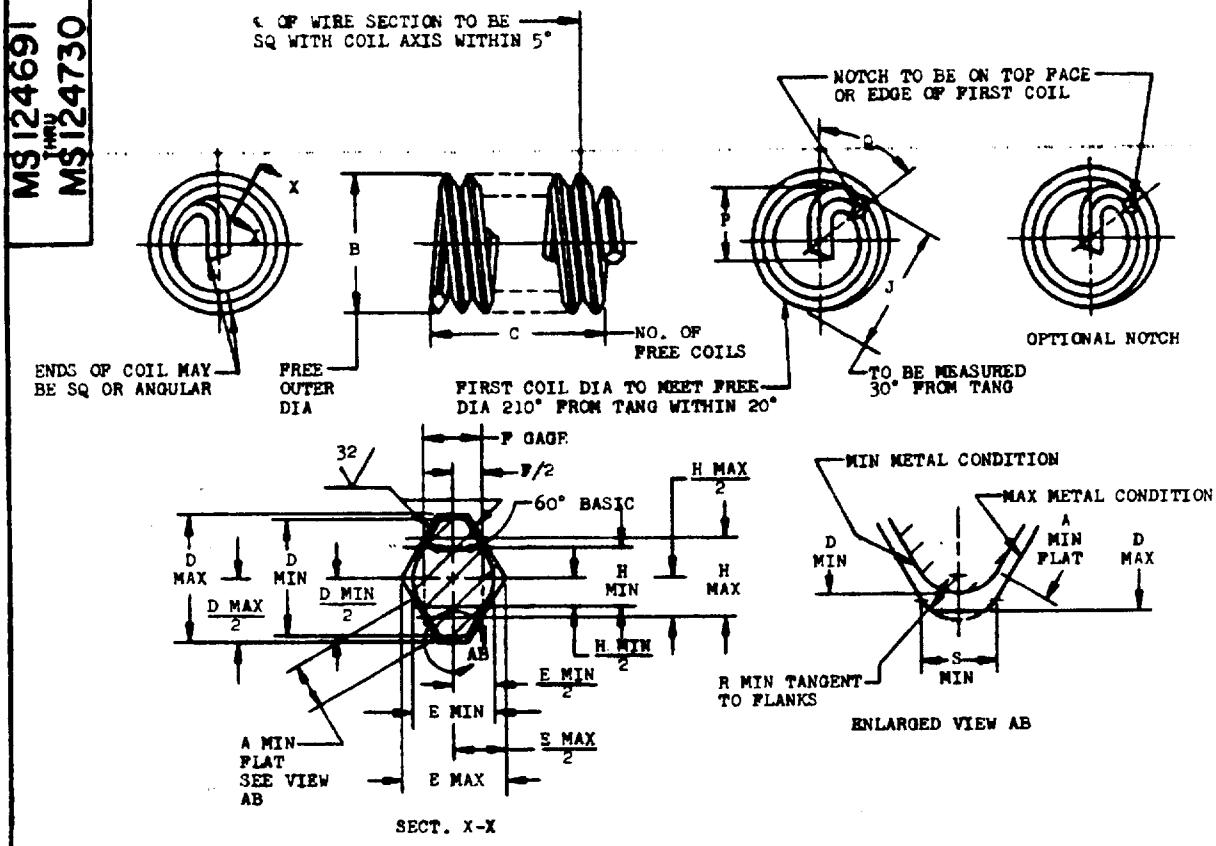

(E)

THREAD SIZE	** NOMINAL LENGTH	A MIN	B MIN	B MAX	C* ±.250 COIL	D MIN	D MAX	E MIN	E MAX	F GAGE	H MIN	H MAX
.099 -56	.148	.0027	.131	.146	5.625	.0163	.0193	.0126	.0156	.00893	.0112	.0116
.112 -48	.168	.0043	.147	.162	5.625	.0190	.0226	.0152	.0182	.01042	.01313	.01353
.138 -40	.207	.0068	.173	.193	6.000	.0241	.0271	.0189	.0219	.01250	.01584	.01624
.164 -36	.246	.0059	.204	.224	6.500	.0261	.0301	.0203	.0243	.01389	.01764	.01804
.190 -32	.285	.0076	.236	.256	6.875	.0295	.0338	.0233	.0273	.01563	.01985	.02030
.250 -28	.375	.0085	.306	.326	8.250	.0347	.0387	.0253	.0313	.01786	.02270	.02328
.3125-24	.469	.0120	.380	.400	8.875	.0410	.0449	.0305	.0365	.02083	.02656	.02706
.375 -24	.562	.0120	.448	.468	11.000	.0410	.0449	.0305	.0365	.02083	.02656	.02706
.4375-20	.656	.0164	.524	.549	10.625	.0500	.0540	.0378	.0438	.02500	.03198	.03248
.500 -20	.750	.0164	.592	.617	12.375	.0500	.0540	.0378	.0438	.02500	.03198	.03248
.5625-18	.844	.0176	.666	.691	12.500	.0560	.0600	.0416	.0486	.02778	.03558	.03608
.625 -18	.938	.0176	.733	.758	14.125	.0560	.0600	.0416	.0486	.02778	.03558	.03608
.750 -16	1.125	.0215	.876	.901	15.125	.0636	.0677	.0477	.0547	.03125	.04009	.04059
.875 -14	1.312	.0267	1.021	1.051	15.500	.0730	.0770	.0545	.0625	.03571	.04589	.04639
1.000 -12	1.500	.0334	1.169	1.199	16.000	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.000 -14(b)	1.500	.0267	1.156	1.186	17.875	.0730	.0770	.0545	.0625	.03571	.04589	.04639
1.125 -12	1.688	.0334	1.304	1.334	17.250	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.250 -12	1.875	.0334	1.439	1.469	19.375	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.375 -12	2.062	.0334	1.575	1.610	21.375	.0861	.0900	.0649	.0729	.04167	.05363	.05413
1.500 -12	2.250	.0334	1.710	1.745	23.500	.0861	.0900	.0649	.0729	.04167	.05363	.05413

(E) FOR CHANGES SEE SHEETS 1 AND 2.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

P.A.	USAF - 11	TITLE	MILITARY STANDARD
Other Cust	Army - AV Navy - AS	INSERT, CRES HELICAL COIL FINE THREAD, 1-1/2 DIA NOMINAL LENGTH	MS 124691 thru MS 124730
PROCUREMENT SPECIFICATION: MIL-I-8846	SUPERSEDES: MS21208 IN PART		SHEET 1 OF 2

Project No. 5340-2005

APPROVED 29 May 53 — REVISED (A) 28 Nove 55 (B) 26 May 59 (C) 24 Oct 66 (D) 15 Oct 69 (E) 24 Feb 76

User: Army - EL, MI, ME, MU
Navy - MC, OS
Air Force -

Review activit.
Army - WC
Navy -
Air Force - 82

This standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5340

MS124691 THRU MS124730

THREAD SIZE	J MIN	J MAX	P MIN	P MAX	Q	R MIN	S MIN	APPROX WEIGHT LB/100	PART NUMBERS NOTCHED	PART NUMBERS UNNOTCHED(a)
.099 -56	.134	.146	.072	.090	75°-150°	.0032	.0056	.0084	MS124710	
.112 -48	.134	.150	.080	.095	75°-150°	.0038	.0065	.0160	MS124711	
.138 -40			.100	.130	25°-100°	.0045	.0078	.0304	MS124693	MS124713
.164 -36			.117	.147	20°-100°	.0050	.0087	.0502	MS124694	MS124714
.190 -32			.130	.176	15°- 90°	.0056	.0098	.0784	MS124695	MS124715
.250 -28			.173	.239	15°- 70°	.0064	.0112	.155	MS124696	MS124716
.3125-24	.359	.377	.203	.291	15°- 55°	.0075	.0130	.284	MS124697	MS124717
.375 -24	.422	.439	.235	.353	15°- 75°	.0075	.0130	.420	MS124698	MS124718
.4375-20	.484	.514	.281	.416	15°- 75°	.0090	.0156	.699	MS124699	MS124719
.500 -20	.556	.576	.313	.478	15°- 75°	.0090	.0156	.999	MS124700	MS124720
.5625-18	.625	.645	.344	.541	15°- 75°	.0100	.0174	1.266	MS124701	MS124721
.625 -18	.688	.708	.375	.588	15°- 75°	.0100	.0174	1.562	MS124702	MS124722
.750 -16	.820	.840	.453	.562	15°- 75°	.0113	.0195	2.564	MS124703	MS124723
.875 -14	.955	.980	.500	.640	15°- 75°	.0129	.0223	4.000	MS124704	MS124724
1.000 -12	1.094	1.119	.526	.738	15°- 75°	.0150	.0260	6.063	MS124691	
1.000 -14(b)	1.080	1.105	.526	.750	15°- 75°	.0129	.0223	5.263	~~MS124705~~	MS124725
1.125 -12	1.219	1.244	.557	.819	10°- 70°	.0150	.0260	7.572	MS124706	MS124726
1.250 -12	1.344	1.369	.679	.941	10°- 70°	.0150	.0260	9.502	MS124707	MS124727
1.375 -12	1.469	1.494	.689	1.001	10°- 70°	.0150	.0260	11.276	MS124708	MS124728
1.500 -12	1.594	1.624	.811	1.123	10°- 70°	.0150	.0260	13.650	MS124709	MS124729

** 1. NOMINAL LENGTH EQUALS BASIC THICKNESS OF PLATE FOR INSERT ASSEMBLY.
2. ASSEMBLED LENGTH OF INSERT TO BE AS SPECIFIED ON MS33537.
* 3. NUMBER OF FREE COILS TO BE COUNTED AND ASSEMBLED LENGTH OF INSERT TO BE MEASURED 90° FROM TANG.
4. MATERIAL: STEEL, CORROSION RESISTANT, AMS 7245 (MATERIAL AND MFG)
5. SURFACE TEXTURE: ANSI B46.1-1962.
6. INSERT, WHEN ASSEMBLED IN TAPPED HOLE AS SPECIFIED IN MS33537, SHALL PRODUCE A FINISHED THD MEETING ALL REQUIREMENTS OF MIL-S-7742 AND SHALL ACCEPT EXTERNAL MIL-S-8879 THREADS.
7. DIMENSIONS IN INCHES.
8. IDENTIFICATION: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION ON CONTAINER.
9. DO NOT USE UNASSIGNED PART NUMBERS.

(a) UNNOTCHED INSERTS INACTIVE FOR DESIGN AFTER 15 OCT 1969. USE NOTCHED INSERTS. NOTCHED INSERTS CAN UNIVERSALLY REPLACE INACTIVATED INSERTS, BUT THE INACTIVATED INSERTS CANNOT REPLACE THE SUPERSEDING NOTCHED INSERTS.

(b) MS124705 INACTIVE FOR DESIGN AFTER 15 OCTOBER 1969. NO SUPERSEDING STANDARD.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 23 May 53 REVISED (A) 28 Nove 55 (B) 26 May 5 (C) 24 Oct 66 (E) FOR CHANGES SEE SHEETS 1 AND 2

User activities: Army - EL, ME, MI, MU; Navy - MC, OS; Air Force -
Review activities: Army - WC; Navy -; Air Force - 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 11
Other Cust: Army - AV; Navy - AS

TITLE: INSERT, CRES HELICAL COIL FINE THREAD, 1-1/2 DIA NOMINAL LENGTH

MILITARY STANDARD
MS 124691 THRU 124730

PROCUREMENT SPECIFICATION: MIL-I-8846
SUPERSEDES: MS21208 IN PART
SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.