

FED. SUP CLASS
1680

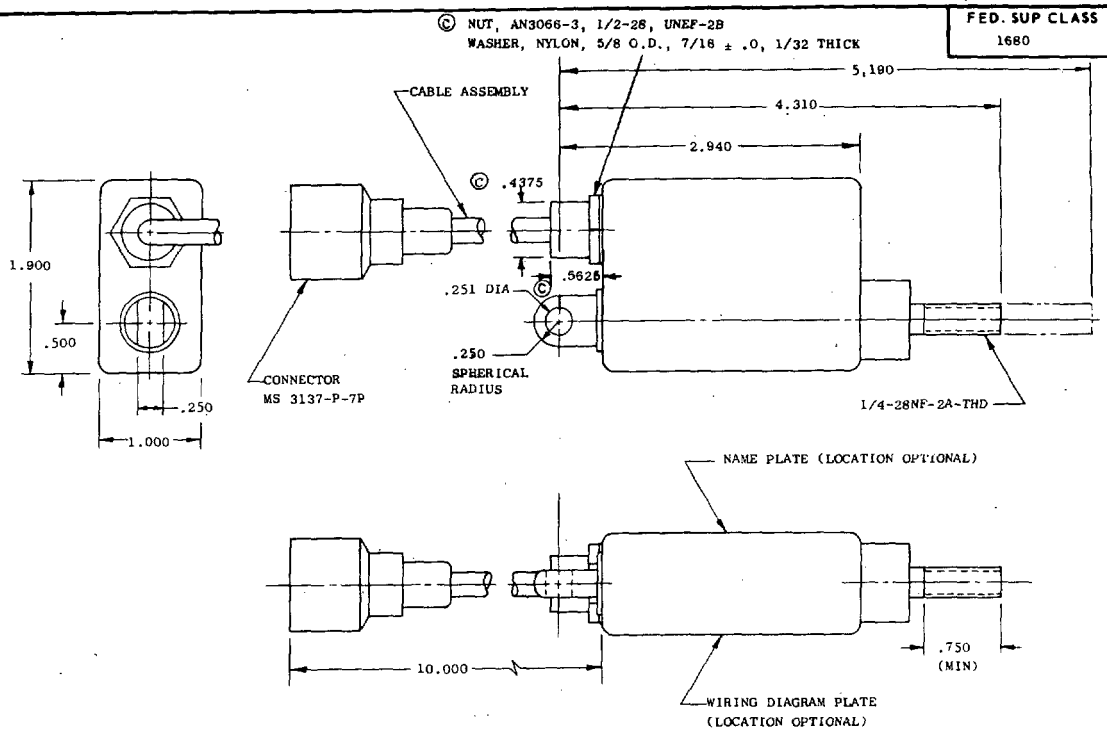

MS 18037-1

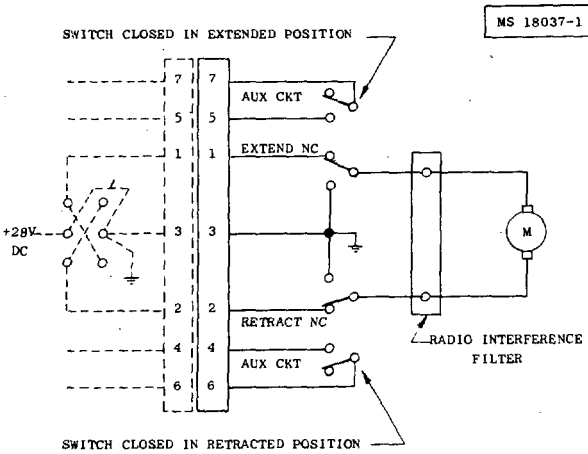

WIRING DIAGRAM MS 18037-1
SEE NOTE 1 THIS SHEET

NOTES:

1. ON WIRING DIAGRAM: SOLID LINES SHOW INTERNAL WIRING, DASHED LINES SHOW TYPICAL EXTERNAL WIRING.
2. ENVELOPE DIMENSIONS SHOWN ARE MAXIMUM ALLOWABLE.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .005.
4. OVERTRAVEL SHALL NOT EXCEED .020 INCH.
5. VIBRATION TEST SHALL BE IN ACCORDANCE WITH THE "VIBRATION TEST" AND "RESONANCE VIBRATION" OF MIL-T-7743 WITH ACTUATOR MOUNTED ON SUSPENSION EQUIPMENT CARRYING 100 POUND AND 1000 POUND STORES RESPECTIVELY.
6. FOR THE SHOCK TEST THE ACTUATOR SHALL BE MOUNTED ON SUSPENSION EQUIPMENT CARRYING 100 POUND AND 1000 POUND STORES RESPECTIVELY.

MS DASH NO.	RATE	LOAD/CURRENT (MAX)			WT OZ MAX	FULL RATED STROKE (MECH)	FULL RATED STROKE (ELECT)
	IN/SEC	RATED	MAXIMUM	STALL			
-1	0.25 ± 20%	.20 LB/0.25 AMP	50 LB/0.40 AMP	120 LB/1.0 AMP	8.5	1.0 +.000 -.010	.88

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(B) ADDED SHEET 3

APPROVED 29 March 1963 REVISED (A) 6 June 1963 (B) 27 June 1963 (C) 1 February 1964

This standard has been approved by the Bureau of Naval Weapons, Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.


P.A. Weps Other Cust	TITLE ACTUATOR, AIRCRAFT, ELECTRO-MECHANICAL, LINEAR, DIRECT CURRENT	MILITARY STANDARD MS 18037 (Wep)
PROCUREMENT SPECIFICATION MIL-A-23622	SUPERSEDES:	SHEET 1 OF 3


DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1680

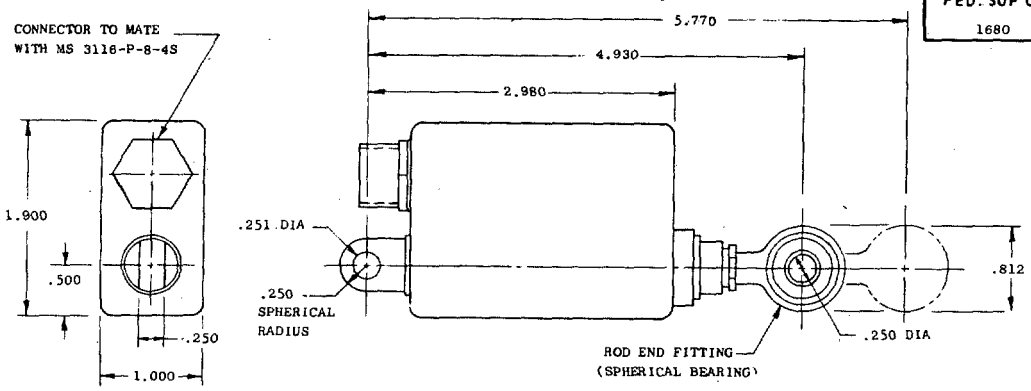

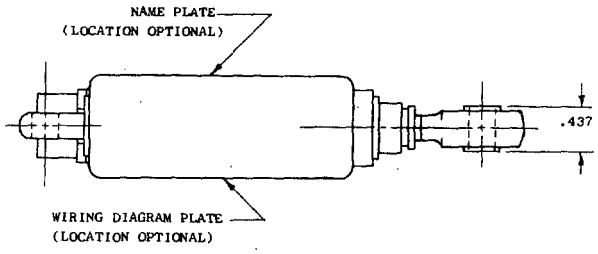

MS 18037-2

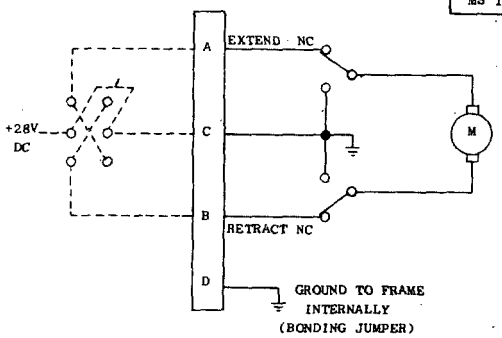

WIRING DIAGRAM MS 18037-2
SEE NOTE 1 THIS SHEET

NOTES:

1. ON WIRING DIAGRAM: SOLID LINES SHOW INTERNAL WIRING, DASHED LINES SHOW TYPICAL EXTERNAL WIRING.
2. ENVELOPE DIMENSIONS SHOWN ARE MAXIMUM ALLOWABLE.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .005.
4. OVERTRAVEL SHALL NOT EXCEED .020 INCH.
5. VIBRATION TEST SHALL BE IN ACCORDANCE WITH THE "VIBRATION TEST" AND "RESONANCE VIBRATION" OF MIL-T-7743 WITH ACTUATOR MOUNTED ON SUSPENSION EQUIPMENT CARRYING 100 POUND AND 1000 POUND STORES RESPECTIVELY.
6. FOR THE SHOCK TEST THE ACTUATOR SHALL BE MOUNTED ON SUSPENSION EQUIPMENT CARRYING 100 POUND AND 1000 POUND STORES RESPECTIVELY.

MS DASH NO.	RATE IN/SEC	LOAD/CURRENT (MAX) RATED	MAXIMUM	STALL	WT.OZ MAX	FULL RATED STROKE (MECH)	FULL RATED STROKE (ELECT)
-2	0.12 ± 20%	40 LB/0.25 AMP	100 LB/0.50 AMP	250 LB/1.0 AMP	8.5	1.0 +.040 -.010	.84

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 29 March 1963 REVISED (A) 6 June 1963 (B) SEE SHEET 3 © 1 February 1964


This standard has been approved by the Bureau of Naval Weapons, Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Weps Other Cust	TITLE ACTUATOR, AIRCRAFT, ELECTRO-MECHANICAL, LINEAR, DIRECT CURRENT	MILITARY STANDARD MS 18037 (Wep)
PROCUREMENT SPECIFICATION MIL-A-23622	SUPERSEDES:	SHEET 2


DD FORM 1 SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1680

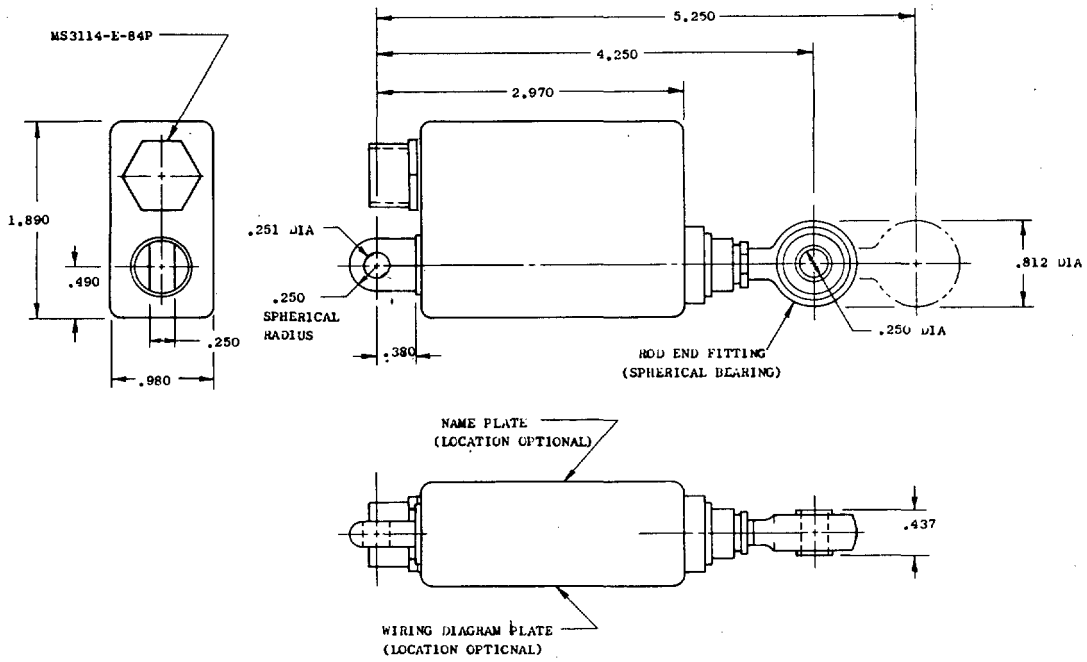

MS 18037-3

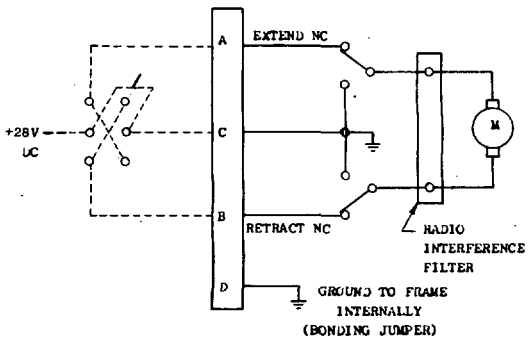

WIRING DIAGRAM MS 18037-3
SEE NOTE 1 THIS SHEET

NOTES:

1. ON WIRING DIAGRAM: SOLID LINES SHOW INTERNAL WIRING, DASHED LINES SHOW TYPICAL EXTERNAL WIRING.
2. ENVELOPE DIMENSIONS SHOWN ARE MAXIMUM ALLOWABLE.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .005.
4. OVERTRAVEL SHALL NOT EXCEED .020 INCH.
5. VIBRATION TEST SHALL BE IN ACCORDANCE WITH THE "VIBRATION TEST" AND "RESONANCE VIBRATION" OF MIL-T-7743 WITH ACTUATOR MOUNTED ON SUSPENSION EQUIPMENT CARRYING 100 POUND AND 1000 POUND STORES RESPECTIVELY.
6. FOR THE SHOCK TEST THE ACTUATOR SHALL BE MOUNTED ON SUSPENSION EQUIPMENT CARRYING 100 POUND AND 1000 POUND STORES RESPECTIVELY.
7. STROKE IS NOT ADJUSTABLE.

MS DASH NO.	RATE	LOAD/CURRENT (MAX)			WT OZ	FULL RATED	FULL RATED
	IN/SEC	RATED	MAXIMUM	STALL	MAX	STROKE (MECH)	STROKE (ELECT)
-3	0.12 ± 20%	40 LB/0.25 AMP	100 LB/0.50 AMP	250 LB/1.0 AMP	8.5	1.0	1.00

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 29 March 1963 REVISED (B) 27 June 1963 (C) 1 FEBRUARY 1964

This standard has been approved by the Bureau of Naval Weapons Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Weps Other Cust	TITLE ACTUATOR, AIRCRAFT, ELECTRO-MECHANICAL, LINEAR, DIRECT CURRENT	MILITARY STANDARD MS 18037 (Wep)
PROCUREMENT SPECIFICATION MIL-A-23622	SUPERSEDES:	SHEET 3 OF

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:13Z
Check the source to verify that this is the current version before use.