FED SUP CLASS
5935

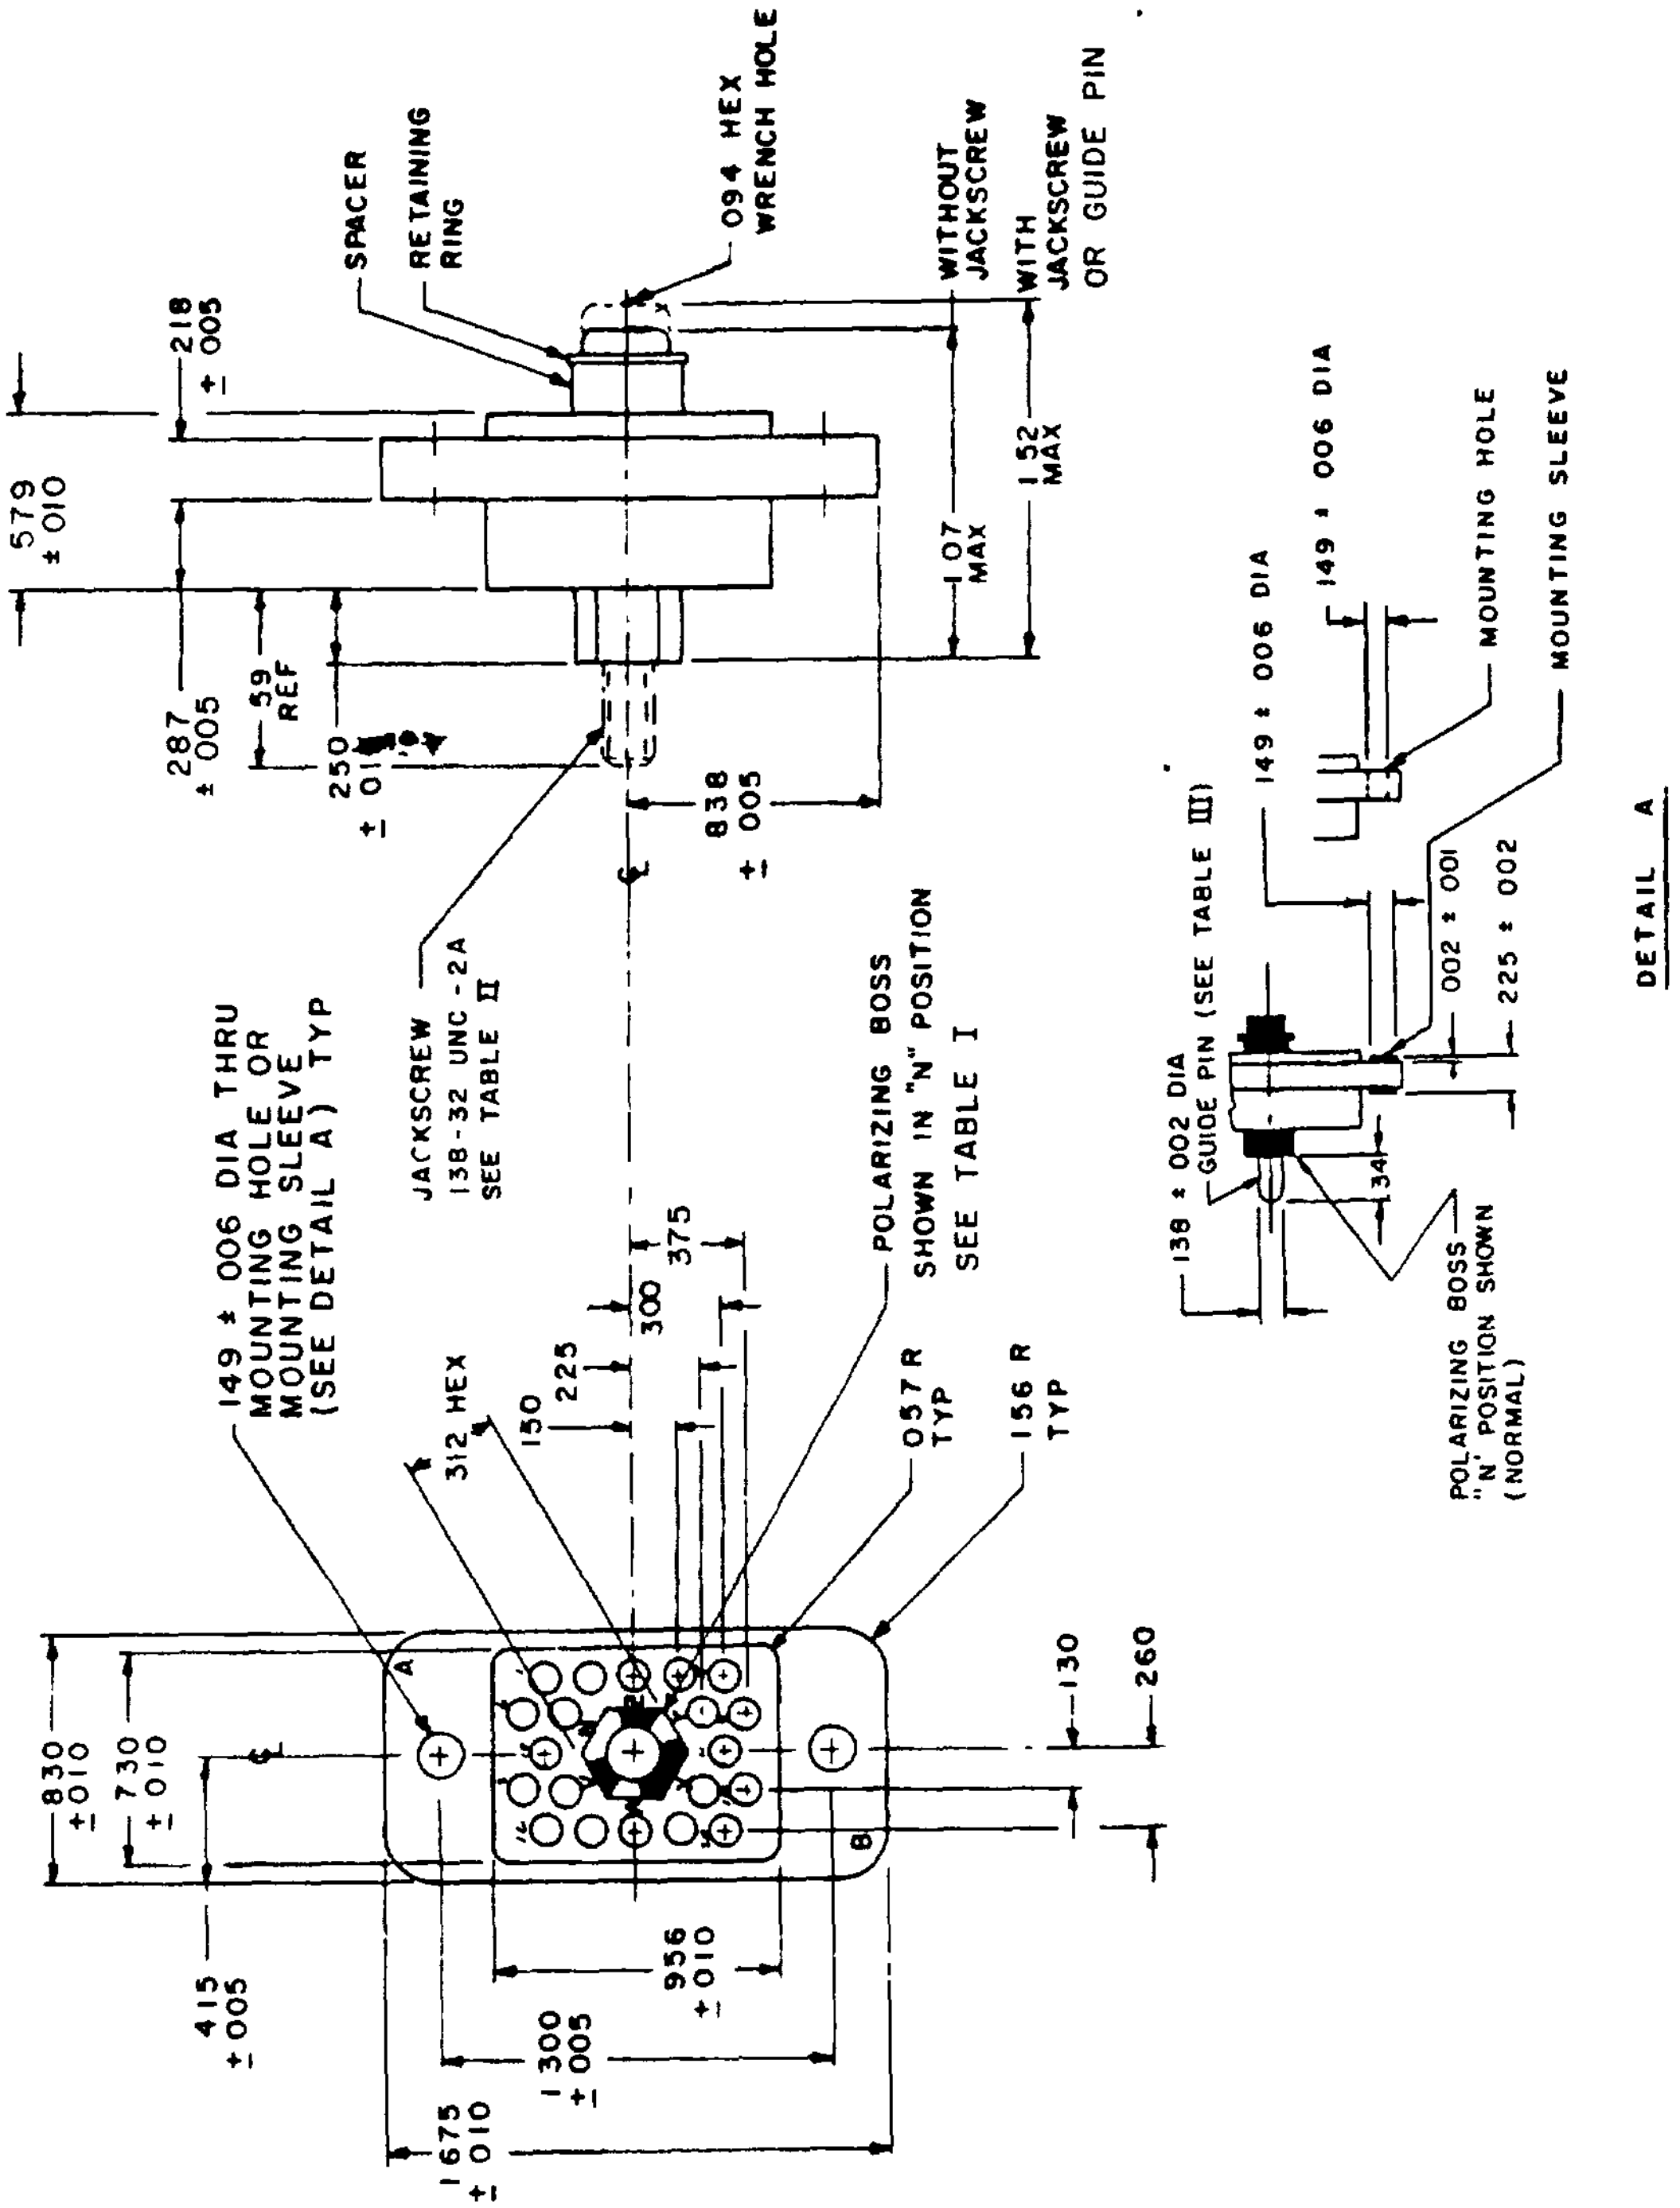

Design standard for use with MIL-C-28748/9

Ⓒ Entire standard revised

User activities Army ME, AV, WC
Navy MC
Air Force

Reviewer activities Army MI, MU, AT
Navy AS, SH, OS
Air Force 11, 80
DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED 20 Dec 1965 REVISED Ⓐ 29 Jul 1968 Ⓑ 20 May 1970 Ⓒ 8 July 1976

Preparing activity Navy - EC

Other Custodians
AF - 85
Army - EL

International interest

Procurement Specification
MIL-C-28748

TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 20 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS

SUPERSEDES

MILITARY STANDARD

MS 18157

SHEET 1 OF 3

5935-2004-7

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED SUP CLASS
5935

TYPE
SEE TABLE I



TABLE I		
TYPE	A	B
1	90°	135°
2	85°	137° 30'

TABLE II

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18157-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18157-1V	V (TYPE 1)	
MS 18157-1W	W (TYPE 1)	
MS 18157-1X	X (TYPE 2)	
MS 18157-1Y	Y (TYPE 2)	
MS 18157-1Z	Z (TYPE 2)	
MS 18157-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY 138-32 UNC-2B
MS 18157-2V	V (TYPE 1)	
MS 18157-2W	W (TYPE 1)	
MS 18157-2X	X (TYPE 2)	
MS 18157-2Y	Y (TYPE 2)	
MS 18157-2Z	Z (TYPE 2)	

TABLE III

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18157-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18157-3V	V (TYPE 1)	
MS 18157-3W	W (TYPE 1)	
MS 18157-3X	X (TYPE 2)	
MS 18157-3Y	Y (TYPE 2)	
MS 18157-3Z	Z (TYPE 2)	
MS 18157-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .144 ± .002 I D TO ACCEPT GUIDE PIN
MS 18157-4V	V (TYPE 1)	
MS 18157-4W	W (TYPE 1)	
MS 18157-4X	X (TYPE 2)	
MS 18157-4Y	Y (TYPE 2)	
MS 18157-4Z	Z (TYPE 2)	

* LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY

APPROVED 20 Dec 1965 REVISED (C) For changes see sheets 1, 2 and 3

User activities Army ME, AV, WC
Navy MC
Air Force

Reviewer activities Army MI, MU, AT
Navy AS, SH, OS
Air Force 11, 80
DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A Navy - EC

Other Cust
AF - 85
Army - EL

International interest

Procurement Specification
MIL-C-28748

TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 20 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS

SUPERSEDES

MILITARY STANDARD

MS 18157

SHEET 2 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-7

FED SUP CLASS
5935

INCHES	MM	INCHES	MM
001	03	287	7 29
002	05	300	7 62
005	13	312	7 93
006	15	340	8 64
010	25	375	9 53
057	1 45	415	10 54
094	2 39	579	14 71
130	3 30	590	14 99
.138	3 51	730	18 54
149	3 78	830	21 08
150	3 81	838	21 29
156	3 96	956	24 28
218	5 54	1 070	27 18
225	5 72	1 300	33 02
250	6 35	1 520	37 61
260	6 60	1 675	42 55

NOTES

1. Dimensions are in inches
2 Unless otherwise specified, tolerance is ±.015 (.38 mm)
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4 Tolerance between any two adjacent contact centers shall be ±.004 (.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (.15 mm).
5. Contact hole details shall be in accordance with MIL-C-28748.
6. For mating connector see MS18158 (socket body)
7. Dimensions symmetrical about centerlines.
8 For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Reference documents shall be of the issue in effect on date of invitation for bid
10. Insert material shall be in accordance with MIL-C-28748
11 Flatness, squareness and parallelism shall be within dimensional tolerances.
12. Center polarizing hardware may be rotated by removing retaining ring and spacer or removing cap (left hand thread) at rear of insert.
13 Maximum insertion and withdrawal force (connector assembly) shall be 18 pounds.
14. Maximum torque required at jackscrew to properly engage or disengage connector shall be 2 inch pounds
15. Jackscrew wrench size 3/32 hex

User activities Army ME, AV, WC
Navy MC
Air Force

Reviewer activities Army MI, MU, AT
Navy AS, SH, OS
Air Force 11, 80
DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be ... from this document

APPROVED 20 Dec 1965 REVISED Ⓒ For changes see sheets 1, 2 and 3

P A Navy - EC Other Cust AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 20 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS	MILITARY STANDARD MS 18157
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 3 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-7