
FED SUP CLASS
5935

User activities: Army ME, AV, WC; Navy MC; Air Force

Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA-ES

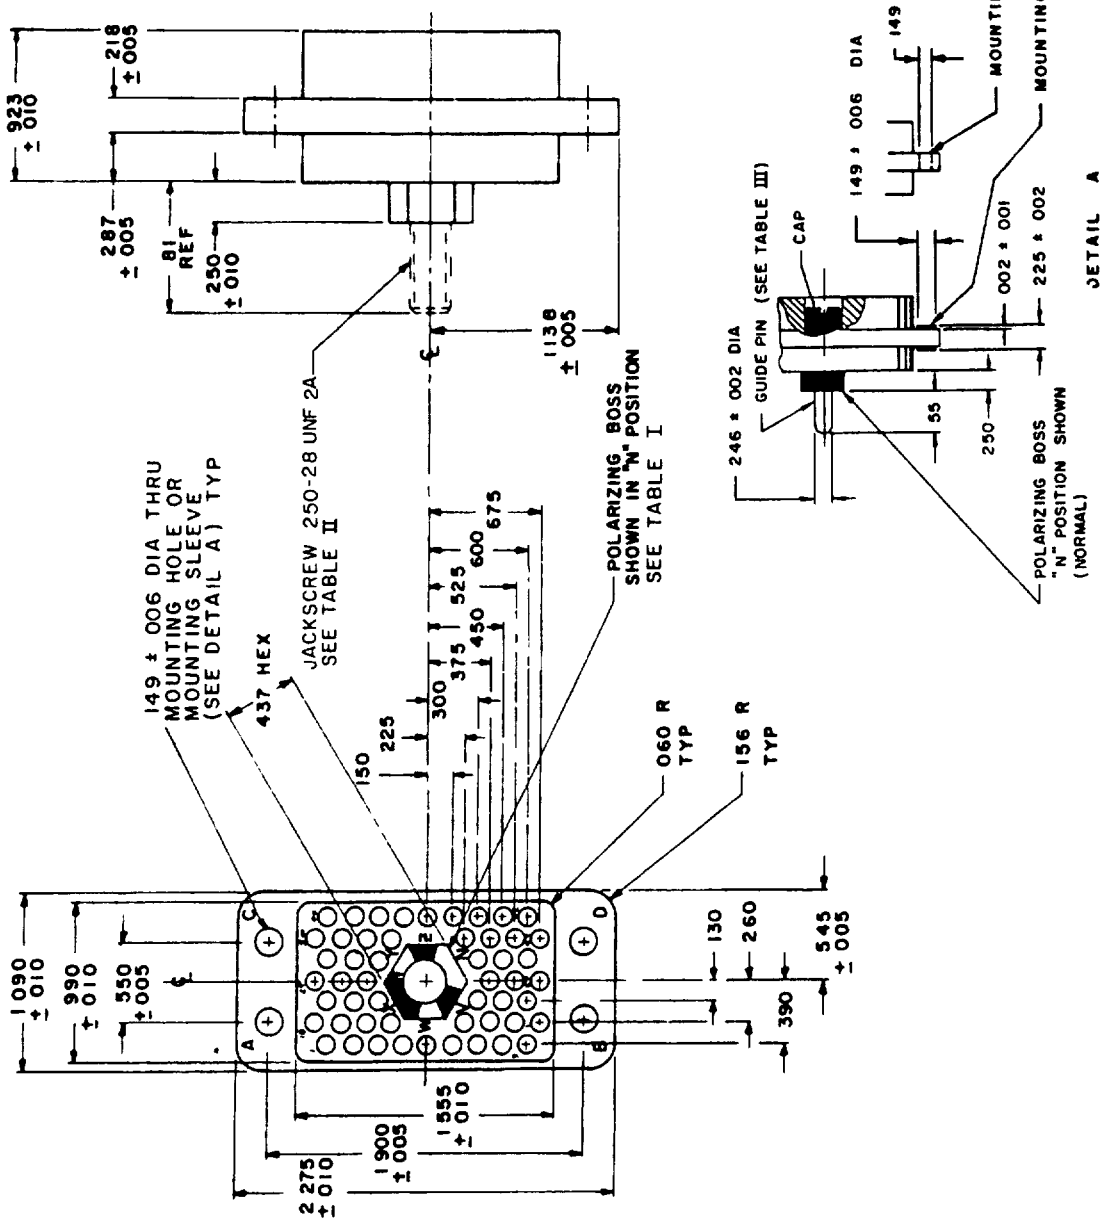

Design standard for use with MIL-C-28748/10

Ⓑ Entire standard revised

APPROVED 20 Dec 1965 REVISED Ⓐ 20 May 1970 Ⓑ 8 July 1976

P - Navy - EC Preparing Activity AF - 85 Army - EL Project Specification MIL-C-28748	International Series	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 52 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS SUPERSEDES	MILITARY STANDARD MS 18162 SHEET 1 OF 3

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-12

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use will result from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

User activities Army ME, AV, WC
Navy MC
Air Force

Reviewer activities Army MI, MU, AT
Navy AS, SH, OS
Air Force 11, 80
DSA - ES

TYPE
SEE TABLE I




TABLE I		
TYPE	A	B
1	90°	135°
2	85°	137° 30'

TABLE II		
MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18162-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18162-1V	V (TYPE 1)	
MS 18162-1W	W (TYPE 1)	
MS 18162-1X	X (TYPE 2)	
MS 18162-1Y	Y (TYPE 2)	
MS 18162-1Z	Z (TYPE 2)	
MS 18162-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY 250-28 UNF-2B
MS 18162-2V	V (TYPE 1)	
MS 18162-2W	W (TYPE 1)	
MS 18162-2X	X (TYPE 2)	
MS 18162-2Y	Y (TYPE 2)	
MS 18162-2Z	Z (TYPE 2)	

TABLE III		
MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18162-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18162-3V	V (TYPE 1)	
MS 18162-3W	W (TYPE 1)	
MS 18162-3X	X (TYPE 2)	
MS 18162-3Y	Y (TYPE 2)	
MS 18162-3Z	Z (TYPE 2)	
MS 18162-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ± .002 I.D. TO ACCEPT GUIDE PIN
MS 18162-4V	V (TYPE 1)	
MS 18162-4W	W (TYPE 1)	
MS 18162-4X	X (TYPE 2)	
MS 18162-4Y	Y (TYPE 2)	
MS 18162-4Z	Z (TYPE 2)	

* LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use will be made from this document

P A Navy - EC Other Cust AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 52 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS 18162
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
001	03	375	9 53
002	05	390	9 91
.005	13	437	11 10
006	15	450	11 43
010	25	.525	13 34
060	1 52	.545	13 84
130	3 30	550	13 97
149	3 78	600	15.24
150	3 81	675	17.15
156	3 96	810	20 57
218	5 54	923	23 44
225	5 72	990	25 15
.246	6 25	1 090	27 69
250	6 35	1 138	28 91
260	6 60	1 555	39 50
.287	7 29	1 900	48 26
300	7 62	2 275	57 79

NOTES

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 015 (.38 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance between any two adjacent contact centers shall be ±.004 (.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (.15 mm).
5. Contact hole details shall be in accordance with MIL-C-28748.
6. For mating connector see MS18161 (pin body).
7. Dimensions symmetrical about centerlines.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Reference documents shall be of the issue in effect on date of invitation for bid.
10. Insert material shall be in accordance with MIL-C-28748
11. Flatness, squareness and parallelism shall be within dimensional tolerances.
12. Center polarizing hardware may be rotated by removing retaining ring and spacer or removing cap (left hand thread) at rear of insert
13. Maximum insertion and withdrawal force (connector assembly) shall be 48 pounds.
14. Maximum torque required at jackscrew to properly engage or disengage connector shall be 4 inch pounds.
15. Jackscrew wrench size 5/32 hex.

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

User activities: Army ME, AV, WC; Navy MC; Air Force
Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA - ES

military standard is approved for use by all Departments and Agencies of the Department
fense. Selection for all new engineering and design applications and for repetitive use
[illegible] document

P.A. Navy - EC Other Cognizant Activities AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 52 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS 18162
Preparing Activity MIL-C-28748		SUPERSEDES	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.