INCH-POUND
MS21355L
2 November 2022
SUPERSEDING
MS21355K
w/Amendment 1
21 March 2017

DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, POSITIVE BREAK, MINIATURE, TOGGLE SEALED, PRINTED CIRCUIT BOARD TERMINALS, DOUBLE POLE, .250 MOUNTING BUSHING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and MIL-DTL-8834.


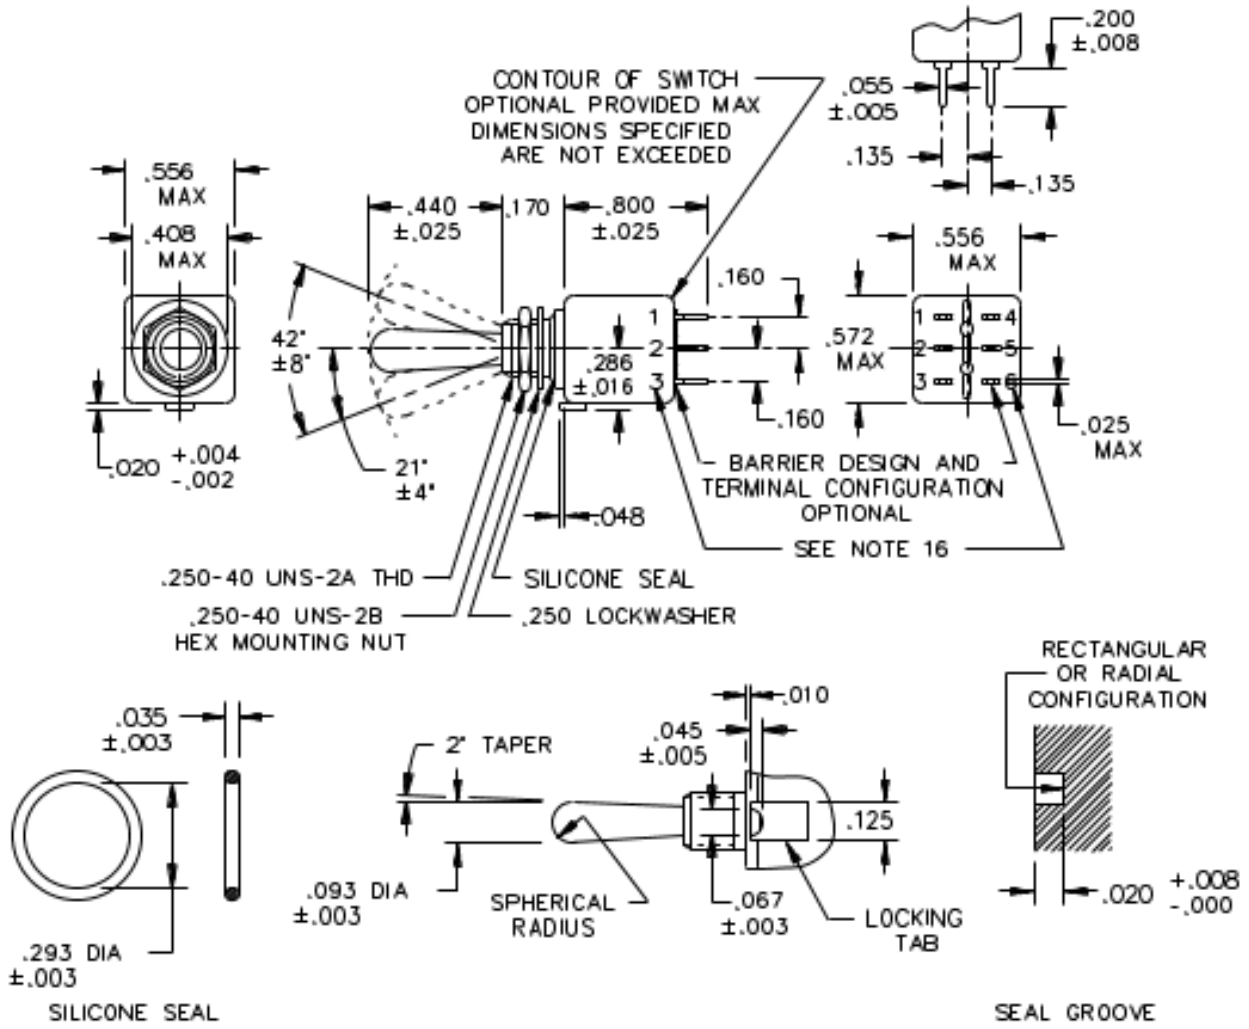


FIGURE 1. Dimensions and configuration.

AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.

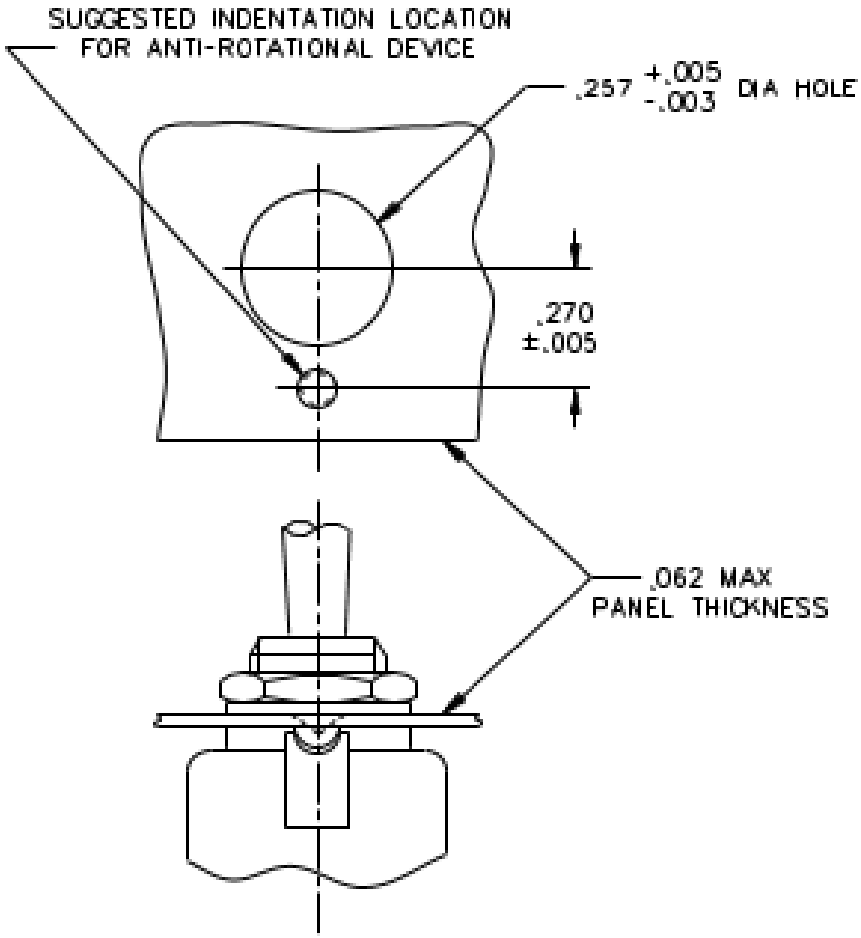

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.010 on decimals and ±5° on angles.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

For hardware detail specifications, see appendix of MIL-DTL-8834.

In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Referenced Government documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

Dielectric withstanding voltage: For center on circuits, DWV shall be 1,200 V rms at sea level.

115 V ac 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

Switches shall be rigidly mounted by their normal means on a rigid metal panel and subjected to shock test of MIL-STD-202-207. The switch shall be electrically and mechanically operative at the conclusion of the test and there shall be no mechanical transfer during the test.

Terminals: Gold plated.

Suitable for mounting on panels. .062 inches (1.57 mm) maximum thickness.

Weight: .0143 pound maximum (6.5 grams).

Strength of terminals: 5 pounds normal to the mounting plane and 1 pound in other planes.

Altitude: 50,000 feet.

Strength of actuator: Lever pivot and lever stop 6 pounds.

Terminals need not be marked. Terminal identification is shown for reference purposes only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.

TABLE I. Detail requirements.

MS dash no	Circuit made between terminals as indicated with the toggle lever in these positions: 1/			Current capacity in amperes						Low current level switching 5 mV
				Resistive load			Inductive load			
					115 V			115 V		
	Opposite locking tab side 4/	Center position	Locking tab side 4/	28 V dc	60 Hz ac	400 Hz ac	28 V dc	60 Hz ac	400 Hz ac	
-211	on 2-3 5-6	off	on 1-2, 4-5	5	2	3	2/ 1	1	2	3/ 25 µA
-221		none	off							
-231			on 1-2, 4-5							
-241		off	none							
-271	mom-on 2-3, 5-6		mom-on 1-2 4-5							
-281	none									
-311	on 2-3, 5-6									
-321 5/	none	on 2-3, 5-6								
-331 5/	on 2-3, 5-6	2-3 on 4-5	on 1-2, 4-5							
-341 5/	mom-on 2-3, 5-6		mom-on 1-2, 4-5							
-351 5/	on 2-3, 5-6									

1/ Direction of movement of internal mechanism is opposite to the direction of the toggle movement.
2/ With time constant of .020 ±.002 second.
3/ Contact resistance not to exceed 50Ω during life, low current level switching.
4/ Non-functional terminals shall not be supplied.
5/ Delayed action of the switch toggle lever may cause circuit to close or open before snap action mechanism trips.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-DTL-8834, this document references MIL-STD-202-207.

Custodians:
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA – CC

(Project 5930-2022-076)

Review activities:
Army - MI
Navy - EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:36Z
Check the source to verify that this is the current version before use.