FED. SUP CLASS
4730

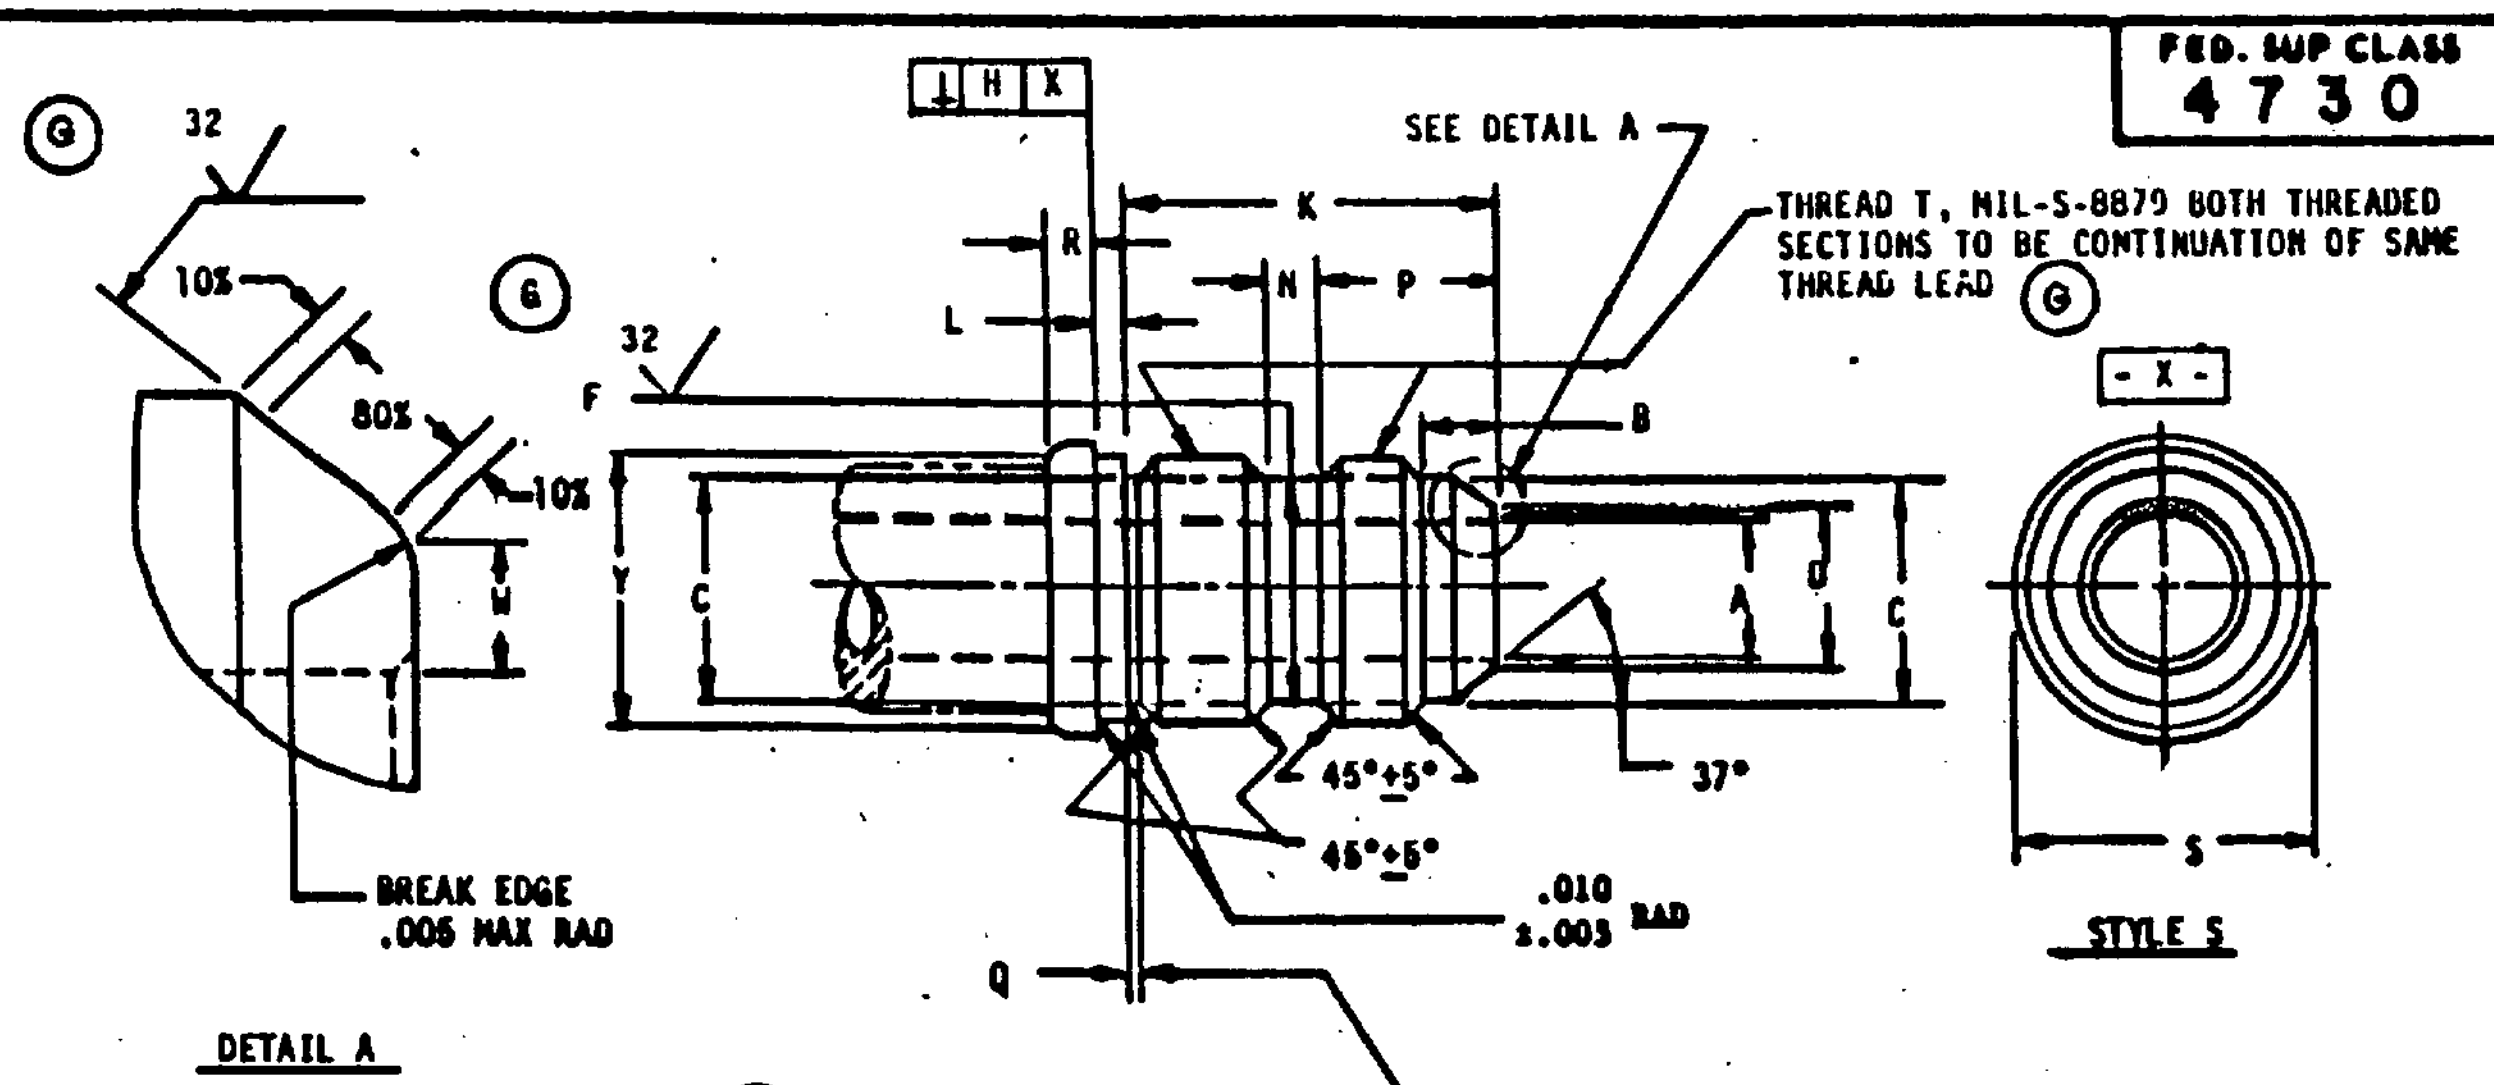

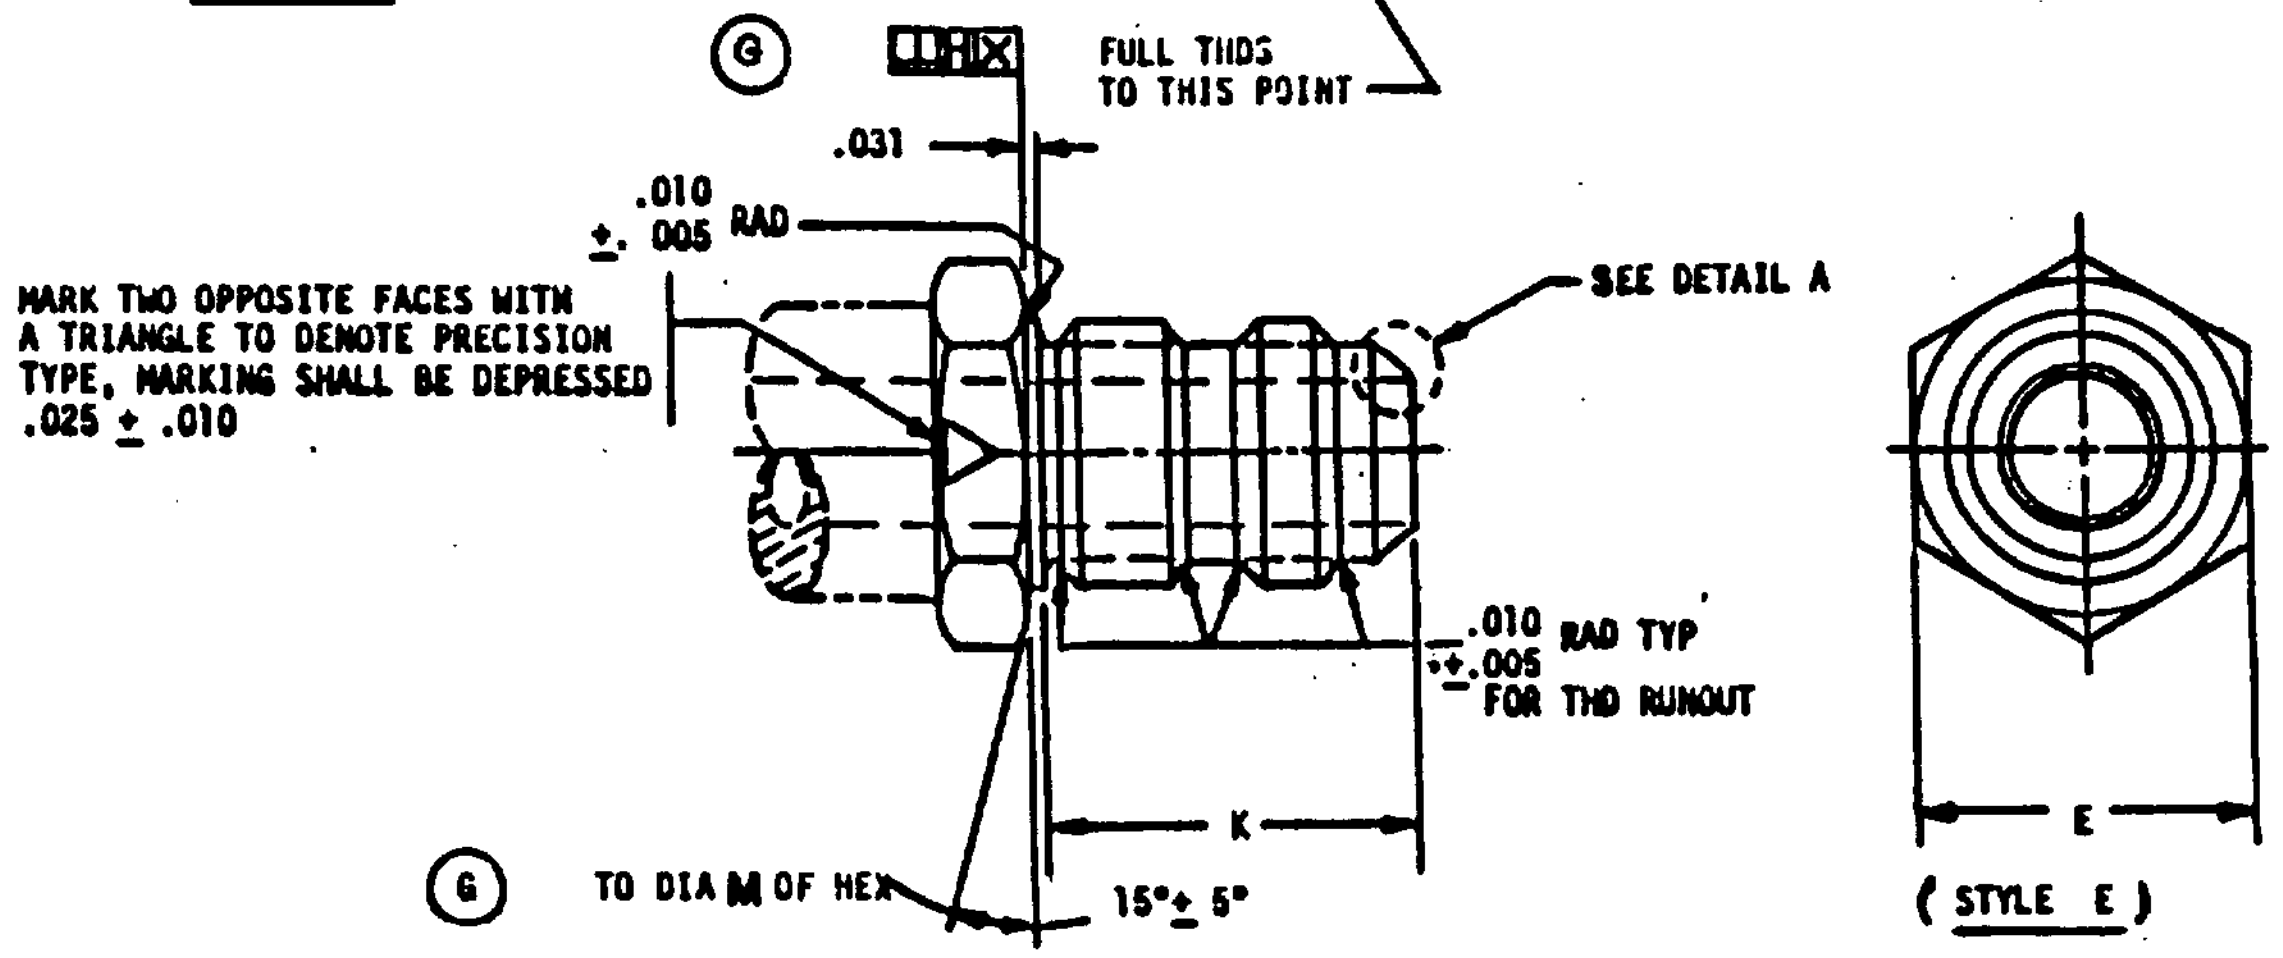

REINSTATED AS OF 15 JUN 83

Ⓖ

THE CONICAL SEAL SURFACE SHALL BE FREE OF FLAWS, NICKS AND CHATTER MARKS WHEN VIEWED WITH THE UNAIDED EYE. THE CENTER 80% OF THE CONICAL SURFACE (SEE DETAIL A) SHALL ALSO HAVE NO LOW SPOTS AND SHALL HAVE AN UNBROKEN LINE OF CONTACT TO SHOW ALL AROUND WHEN ROTATED IN CONTACT WITH A 74° 0' + 1' INCLUDED ANGLE GAGE LIGHTLY COATED BY RUBBING WITH CARBON PAPER OR BY AN EQUIVALENT BLUEING METHOD.

L AS LISTED PROVIDES FOR A WASHER TO FORM BACKING FACE AGAINST BULKHEAD PLUS 1/32 LAND FOR POSITIONING IN BULKHEAD. WHEN DESIGN OF FITTING INCLUDES A HEX OR FACE EQUAL TO OR GREATER THAN E, NO WASHER IS REQUIRED AND THIS DIMENSION WILL BE .031 AS IN STYLE E.

TOLERANCE ON F MAY BE +.002 -.003 PROVIDED NO THREAD MARKS ARE PRESENT.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.

DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ± 1/2°, DECIMALS ± .016.

DIMENSIONS D, C, F AND T (PITCH DIA) SHALL HAVE CIRCULAR RUNOUT TO EACH OTHER AND WITH THE 37° ANGLE, MEASURED AND CALCUALTED AS AN INCLUDED ANGLE, WITHIN .005 FULL INDICATOR MOVEMENT. OTHER DIAMETERS SHALL HAVE CIRCLULAR RUNOUT TO EACH OTHER WITHIN .010 FIM.

ALL MACHINED SURFACES SHALL BE SMOOTH TO 125 MICROINCHES Ra PER ANSI B46.1 UNLESS NOTED.

NOTES:
REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.

APPROVED 12 FEB 57 REVISED Ⓑ 25 OCT 74 Ⓒ 15 MAY 75 Ⓓ 12 APR 76 Ⓔ 28 SEP 1982 Ⓕ 16 JUN 83 Ⓖ 16 JAN 1989

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

THIS MILITARY STANDARD IS APPROVED FOR USE BY THE SAN ANTONIO ALC (CODE 82), AND IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Review activities:
ARMY - MI
DLA - CS

FOR CHANGES SEE SHEET I

THIS IS A DESIGN STANDARD, NOT TO BE USED AS PART NUMBER. Ⓖ DENOTES CHANGES

P.A. AIR FORCE - 82 Other Cust AIR FORCE - 99	TITLE FITTING END, BULKHEAD FLARED TUBE CONNECTION PRECISION TYPE, STANDARD DIMENSIONS	MILITARY STANDARD MS24386(USAF)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

THIS MILITARY STANDARD IS APPROVED FOR USE BY THE SAN ANTONIO ALC (CODE 82), AND IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Review activities:
ARMY - MI
DLA -CS

FED. SUP CLASS
4730

TABLE OF DIMENSIONS

SIZE NO.	TUBING OD	Ⓖ THREAD T MIL-S-8879	A DIA		B +.015 -.000	C +.009 -.005 DIA	D +.003 DIA	E		F +.000 -.003 DIA	H MAX.	K	L	Ⓖ M ±.010 DIA	N +.010 -.000	P ±.005	Q +.015 -.000	R	S DIA	W MIN	Y	
																					MAX	MIN
2	1/8	.3125-24 UNJF-3A	.062	+.003 -.004	.177	.245	.083	.563	+.003 -.004	.250	.005	.922	.094	.549	.125	.385	.063	.109	.438	.005	.3125	.3053
3	3/16	.3750-24 UNJF-3A	.125			.307	.146	.625		.312				.611	.131				.500		.3750	.3678
4	1/4	.4375-20 UNJF-3A	.172		.193	.359	.193	.688		.364		1.016		.674	.140	.443	.075	.125	.562		.4375	.4294
5	5/16	.5000-20 UNJF-3A	.234			.421	.255	.750		.426				.736					.625		.5000	.4919
6	3/8	.5625-18 UNJF-3A	.297	±.004	.198	.476	.318	.813		.481		1.094		.799	.156	.476	.083	.141	.688		.5625	.5538
8	1/2	.7500-16 UNJF-3A	.391		.253	.654	.426	1.000		.660		1.250	.125	.986	.187	.565	.094	.156	.875	.012	.7500	.7406
10	5/8	.8750-14 UNJF-3A	.484		.266	.767	.539	1.125		.773		1.391		1.111	.219	.623	.107	.172	1.000	.022	.8750	.8647
12	3/4	1.0625 -12 UNJ-3A	.609	±.005	.315	.938	.664	1.375		.945	.008	1.562		1.361	.234	.732	.125	.188	1.188		1.0625	1.0511
16	1	1.3125 -12 UNJ-3A	.844	+.007 -.005		1.188	.913	1.625	±.016	1.195				1.599					1.438	.029	1.3125	1.3011
20	1-1/4	1.6250 -12 UNJ-3A	1.078	+.008 -.005	.367	1.501	1.147	1.875		1.507		1.609		1.849		.784			1.750		1.6250	1.6136
24	1-1/2	1.8750 -12 UNJ-3A	1.312		.378	1.750	1.381	2.125	±.020	1.756		1.625		2.095		.795			2.000		1.8750	1.8636
28	1-3/4	2.2500 -12 UNJ-3A	1.547	# +.010 -.005	.451	2.125	1.646	2.500		2.131		1.781		2.470		.868			2.375	.044	2.2500	2.2386
32	2	2.5000 -12 UNJ-3A	1.781		.461	2.375	1.880	2.750		2.381		1.906		2.720		.878			2.625		2.5000	2.4886
40	2-1/2	3.0000 -12 UNJ-3A	2.281		.395	2.882	2.380	3.250		2.881		1.719		3.220		.895			3.125		3.0000	2.9886
48	3	3.5000 -12 UNJ-3A	2.781			3.382	2.880	3.750		3.381		1.812		3.720		.978			3.625		3.5000	3.4886

THIS IS A DESIGN STANDARD, NOT TO BE USED AS A PART NUMBER.

APPROVED 12 FEB 57 REVISED Ⓕ FOR CHANGES SEE PAGE 1 Ⓖ FOR CHANGES SEE PAGE 1

P.A. AIR FORCE- 82 Other Cust AIR FORCE - 99	TITLE FITTING END, BULKHEAD FLARED TUBE CONNECTION PRECISION TYPE, STANDARD DIMENSIONS	MILITARY STANDARD MS24386(USAF)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
ASO use only

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.