This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

REVIEWER ACTIVITIES: DLA - ES
USA - 11, 17, 99
ARMY - MI, AV
NAVY - OS, EC


USER ACTIVITIES

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO 5930-1220

Procurement Specifications	MIL-S-6807
P A	USAF - 85
Other Cust	NAVY-AS ARMY-ER
INTERNATIONAL INTEREST	
SUPERSEDES	AN 3211
TITLE	SWITCH, ROTARY, 28/115 VOLTS
SHEET	1 OF 3
MILITARY STANDARD	MS 25002

Ⓙ DENOTES CHANGES

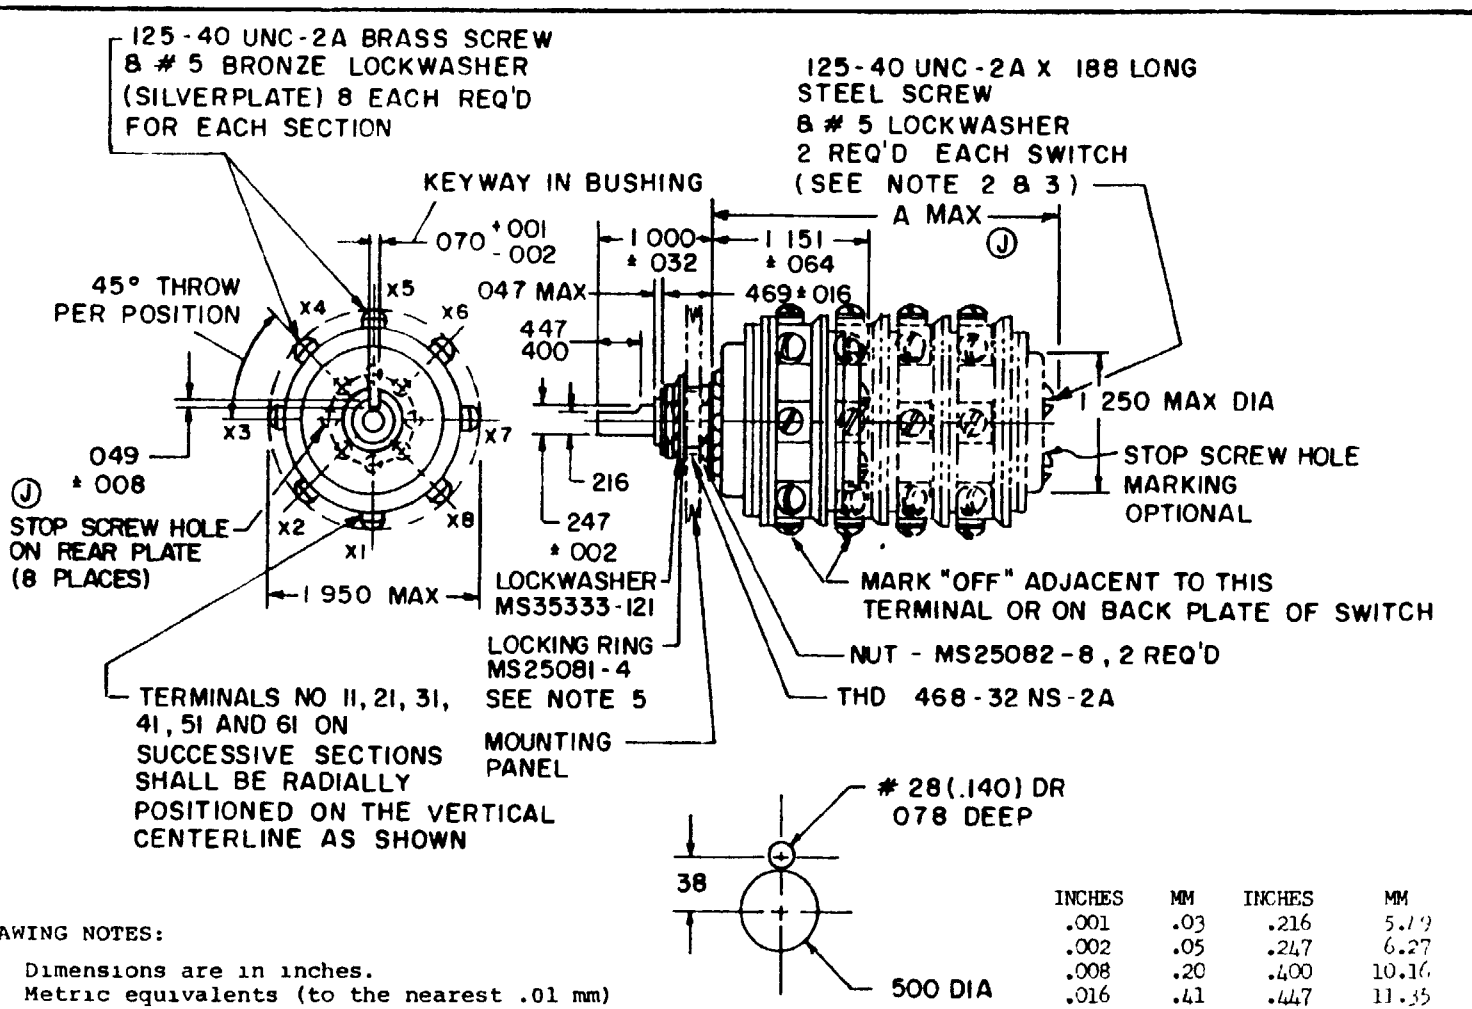

DRAWING NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± .005 (.13mm) and ± 1/2°.

INCHES	MM	INCHES	MM
.001	.03	.216	5.49
.002	.05	.247	6.27
.008	.20	.400	10.16
.016	.41	.447	11.35
.032	.81	.469	11.91
.047	1.19	1.000	25.40
.049	1.24	1.151	29.24
.064	1.63	1.250	31.75
.070	1.78	1.719	43.66
.188	4.78	1.950	49.53

FED SUP CLASS 5930

APPROVED 10 APRIL 53 REVISED Ⓗ 30 APRIL 1979 Ⓙ 17 SEPT 1982

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5930

TABLE I General Requirements

Current Capacity		Sea Level Electrical Cycles	Altitude Electrical Cycles 50,000 Feet	Mechanical Cycles
28 volts DC	Amp			
Resistive Inductive Lamp Load	5 Amp 2.5 Amp 2 Amp	10,000 --------- 10,000	--------- 2,500 ---------	--------- 10,000 ---------
115 volts, 400 Hz AC	Amp			
Resistive 50 percent power factor	5 Amp 2 Amp	10,000 ---------	--------- 2,500	--------- 10,000

TABLE II. Detail Requirements (J)

MS 25002 Shock Method I & II	Number of Sections	Torque (lb-in) Min	Torque (lb-in) Max	Wt Lb Max	A DIM
-1	1	2.0	5.0	.31	1 18
-2	2	3 0	6.0	.37	1.57
-3	3	3.5	7.0	.43	1 94
-4	4	4.0	8.0	50	2 31
-5	5	4.0	9.0	.56	2.69
-6	6	4.0	10.5	.62	3.06

TABLE III. Supersession Table

Superseding Dash No. Shock Method I & II		Superseded Dash No. Shock Method I & II
-1		-12
-2		-22
-3		-32
-4		-42
-5		-52
-6		-62

APPROVED 10 APRIL 53 REVISED (J) FOR CHANGES SEE PAGES 1 & 2

USER ACTIVITIES
REVIEWER ACTIVITIES
DLA - ES
USAF - 11, 17, 99
ARMY - MI, AV
NAVY - OS, EC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
USAF - 85 Other Cust NAVY - AS ARMY - ER		SWITCH, ROTARY, 28/115 VOLTS	MS 25002
Procurement Specifications MIL-S-6807	SUPERSEDES: AN 3211		SHEET 2 OF 3

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

NOTES.

1. For each additional section add .375 (9.53 mm) ± .016 (.41 mm) to the 1.151 (29.24 mm) dimension.
2. Furnished separately with switch.
3. Switch has continuous rotation with 'OFF' and seven 'ON' positions. The indexing arm, visible through the tapped holes, points to the terminal to which contact is being made. Rotation may be restricted by inserting screws in the rear stop plate cover. EXAMPLE: If indexing screws are inserted between terminals X1 and X8, and X3 and X4, as shown, while the indexing arm is at terminal X1, X2, or X3; rotation is restricted to provide an 'OFF' position at X1, and 'ON' positions at X2 and X3. Shaft is shown in the 'OFF' position.
4. Threads in accordance with Handbook H-28, 'Screw-Threads Standards for Federal Services.'
5. 'OFF' position of knob may be oriented as desired by positioning of mounting panel detent for engagement with locking ring bent tab.
6. Shock Method II is required for shipboard application
7. "For design feature purposes, this standard takes precedence over procurement documents referenced herein."
8. "Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted."

APPROVED 10 APRIL 53 REVISED (J) FOR CHANGES SEE PAGES 1 & 2

USER ACTIVITIES
REVIEWER ACTIVITIES ULA - ES
US 11, 17, 99
ARM. - MI, AV
NAVY - OS, EC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A USAF - 85 Other Cust NAVY - AS ARMY - ER	INTERNATIONAL INTEREST	TITLE SWITCH, ROTARY 28/115 VOLTS	MILITARY STANDARD MS 25002
Procurement Specifications MIL-S-6807	SUPERSEDES AN3211		SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.