INCH-POUND

MS25035F
23 May 2023
SUPERSEDING
MS25035E
7 June 2011

DETAIL SPECIFICATION SHEET

RELAY, ELECTROMAGNETIC, TYPE I, 25 AMPERES, 1PST, SEALED, CLASS O

Inactive for new design after 14 November 1979. No superseding document.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-PRF-6106.

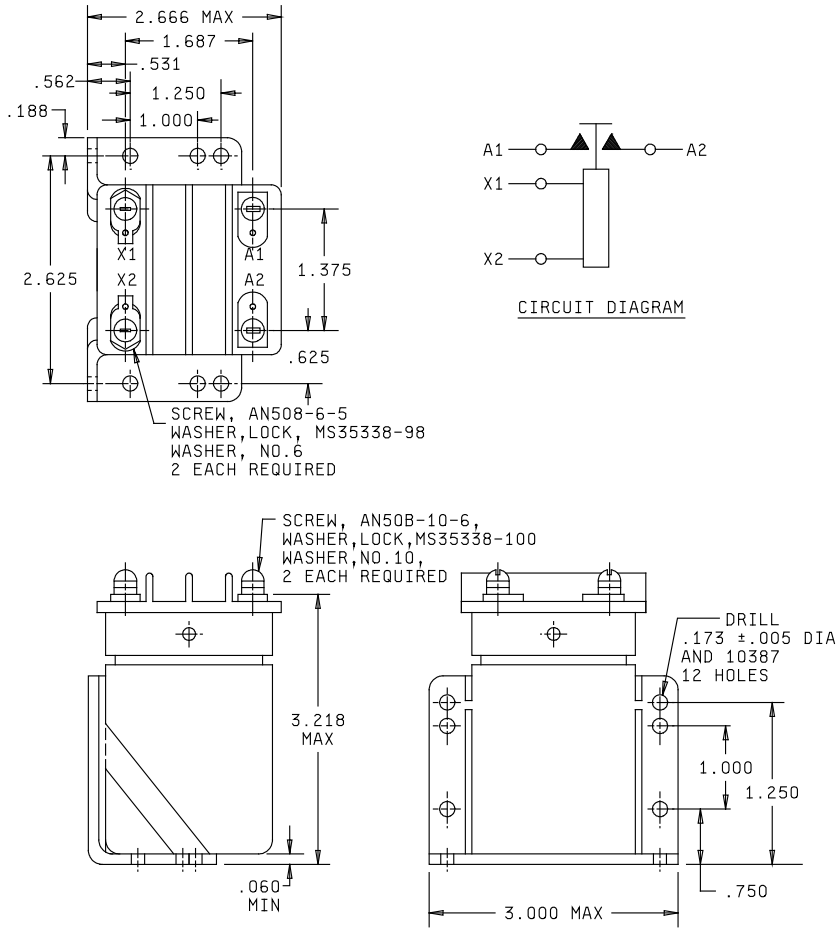


FIGURE 1. Configurations and dimensions.

AMSC N/A

FSC 5945

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

MS25035F			
Inches	mm	Inches	mm
.005	0.013	1.000	25.40
.020	0.51	1.250	31.75
.060	1.52	1.375	34.92
.173	4.39	1.687	42.85
.188	4.78	2.625	66.68
.531	13.49	2.666	67.72
.562	14.27	3.000	76.20
.625	15.88	3.218	81.74
.750	19.05		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance are ±.010 (0.025 mm).

FIGURE 1. Configurations and dimensions - Continued.

REQUIREMENTS

Operating cycles: 50,000 minimum.

Contact data:

Contact voltage drop: Not applicable

Load ratings: See Table I.

TABLE I - Rated contact load (per pole).

Type of load	Amperes
Resistive (DC)	25
Resistive (AC 400 Hz, 115 volts)	25
Inductive (28 V dc)	20
Motor (28 V dc or 115 V ac, 400 Hz)	25
Mixed loads MS25024-2	See MIL-PRF-6106.

Overload current: Not applicable.

Rupture current: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

Coil data:

Nominal coil voltage: 28 volts.

Maximum operating voltage: 29 volts.

Pickup voltage: 18 volts.

Hold voltage: 7 volts.

Dropout voltage: 2 volts.

Rated duty: Continuous.

Coil current: 25 amperes, maximum.

Physical data:

Weight: 12. 5 ounces, maximum.

Qualification by similarity: See MIL-PRF-6106.

Retention of qualification: To retain qualification, the manufacturer shall submit group A acceptance reports every 36 months to the qualifying activity.

Quality conformance inspection: Performance of groups B and C tests are not applicable.

Part or Identifying Number (PIN): MS25035-1.

Referenced documents. This document references MIL-PRF-6106.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2023-039)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.