INCH-POUND

MS27468K
w/AMENDMENT 1
2 February 2017
SUPERSEDING
MS27468K
2 February 2012

DETAIL SPECIFICATION SHEET

# CONNECTORS, RECEPTACLE, ELECTRICAL, JAM-NUT MOUNTING, CRIMP TYPE, BAYONET COUPLING, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

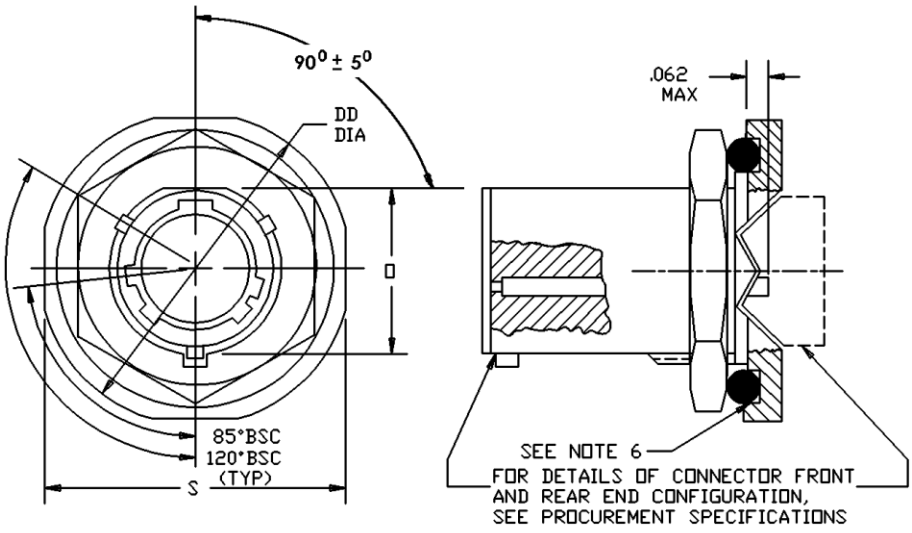



FIGURE 1. Receptacle, classes E, T and P.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

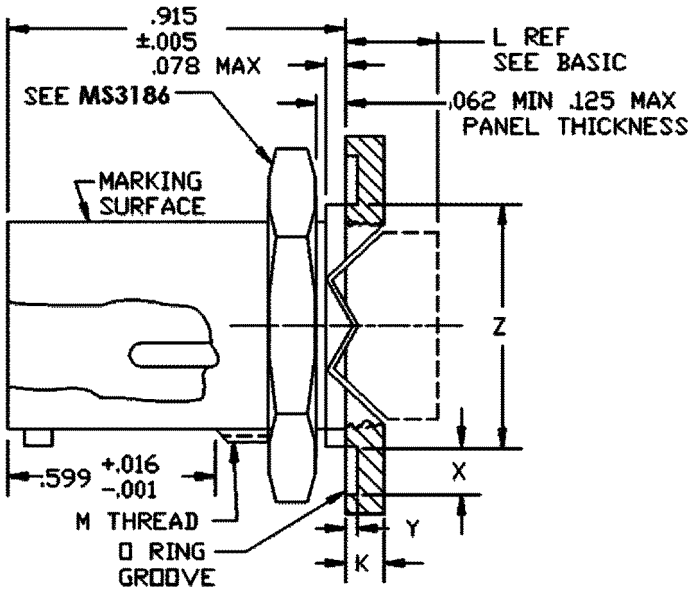



FIGURE 1. Receptacle, classes E, T and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

| Shell size | DD dia ±.016 | K +.011 -.010 | L (class E) max (see MIL-DTL-38999) | L (class P) max (see MIL-DTL-38999) | L (class T) max (see MIL-DTL-38999) | M Thread class 2A UNEF (plated) |
|---|---|---|---|---|---|---|
| 9 | 1.188 | .109 | .328 | .438 | .328 | .6875-24 |
| 11 | 1.375 | | | | | .8125-20 |
| 13 | 1.500 | | | | | 1.0000-20 |
| 15 | 1.625 | | | | | 1.1250-18 |
| 17 | 1.750 | | | | | 1.2500-18 |
| 19 | 1.938 | .140 | | .469 | | 1.3750-18 |
| 21 | 2.062 | | | | | 1.5000-18 |
| 23 | 2.188 | | | | | 1.6250-18 |
| 25 | 2.312 | | | | | 1.7500-18 |

| Shell size | O dia +.000 -.010 | S ±.016 | X +.005 -.001 | Y ±.005 | Z dia +.006 -.005 | O-ring PIN M25988/3 dash number (see note 7) |
|---|---|---|---|---|---|---|
| 9 | .655 | 1.062 | .094 | .045 | .777 | -019 |
| 11 | .755 | 1.250 | | | .965 | -022 |
| 13 | .942 | 1.375 | | | 1.090 | -024 |
| 15 | 1.066 | 1.500 | | | 1.215 | -026 |
| 17 | 1.191 | 1.625 | | | 1.340 | -028 |
| 19 | 1.316 | 1.812 | .141 | .075 | 1.449 | -128 |
| 21 | 1.441 | 1.938 | | | 1.574 | -130 |
| 23 | 1.566 | 2.062 | | | 1.699 | -132 |
| 25 | 1.691 | 2.188 | | | 1.824 | -134 |

FIGURE 1. Receptacle, classes E, T and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|
| .001 | 0.03 | .438 | 11.13 | 1.340 | 34.04 |
| .005 | 0.13 | .469 | 11.91 | 1.375 | 34.93 |
| .006 | 0.15 | .599 | 15.21 | 1.441 | 36.60 |
| .010 | 0.25 | .655 | 16.64 | 1.449 | 36.80 |
| .011 | 0.28 | .755 | 19.18 | 1.500 | 38.10 |
| .015 | 0.38 | .777 | 19.74 | 1.566 | 39.78 |
| .016 | 0.41 | .915 | 23.24 | 1.574 | 39.98 |
| .045 | 1.14 | .942 | 23.93 | 1.625 | 41.28 |
| .062 | 1.57 | .965 | 24.51 | 1.691 | 42.95 |
| .075 | 1.90 | 1.062 | 26.97 | 1.699 | 43.15 |
| .078 | 1.98 | 1.066 | 27.08 | 1.750 | 44.45 |
| .094 | 2.39 | 1.090 | 27.69 | 1.812 | 46.02 |
| .109 | 2.77 | 1.188 | 30.18 | 1.824 | 46.33 |
| .125 | 3.18 | 1.191 | 30.25 | 1.938 | 49.23 |
| .140 | 3.56 | 1.215 | 30.86 | 2.062 | 52.37 |
| .141 | 3.58 | 1.250 | 31.75 | 2.188 | 55.58 |
| .328 | 8.33 | 1.316 | 33.43 | 2.312 | 58.72 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. For main keyway and keyway positions, see MIL-DTL-38999.
4. Jam-nut mounting receptacles shall be provided with an O-ring.
5. Diameters M, DD and Z shall be concentric within .015 inches (0.38 mm) T.I.R.
6. Sides of groove may have 5° maximum taper.
7. See requirements.

FIGURE 1. Receptacle, classes E, T and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall be in accordance with MIL-DTL-38999.
Mating connectors: MS27467, MS27661 and MS27653.
Insert arrangements: See MIL-STD-1560.
Hex nut: See MS3186.
O-ring: See MIL-R-25988/3.

Part or Identifying Number (PIN) example:




Note: For the normal position only, no letter designator is marked on the part, and no letter designator is included in the PIN to indicate the “normal” position. A letter designator is required for all other polarization positions.

Specification restrictions

| Navy | Army | Air Force |
|---|---|---|
| Entire specification sheet inactive for new design. | For ground equipment only, class E is inactive for new design. | Classes E and P are inactive for new design. |

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-R-25988/3
MIL-STD-1560
MS3186
MS27467
MS27653
MS27661

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force – 85
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99
DLA - IS

Preparing activity:
DLA - CC

(Project 5935–2017-033)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.