
FED SUP CLASS
5975

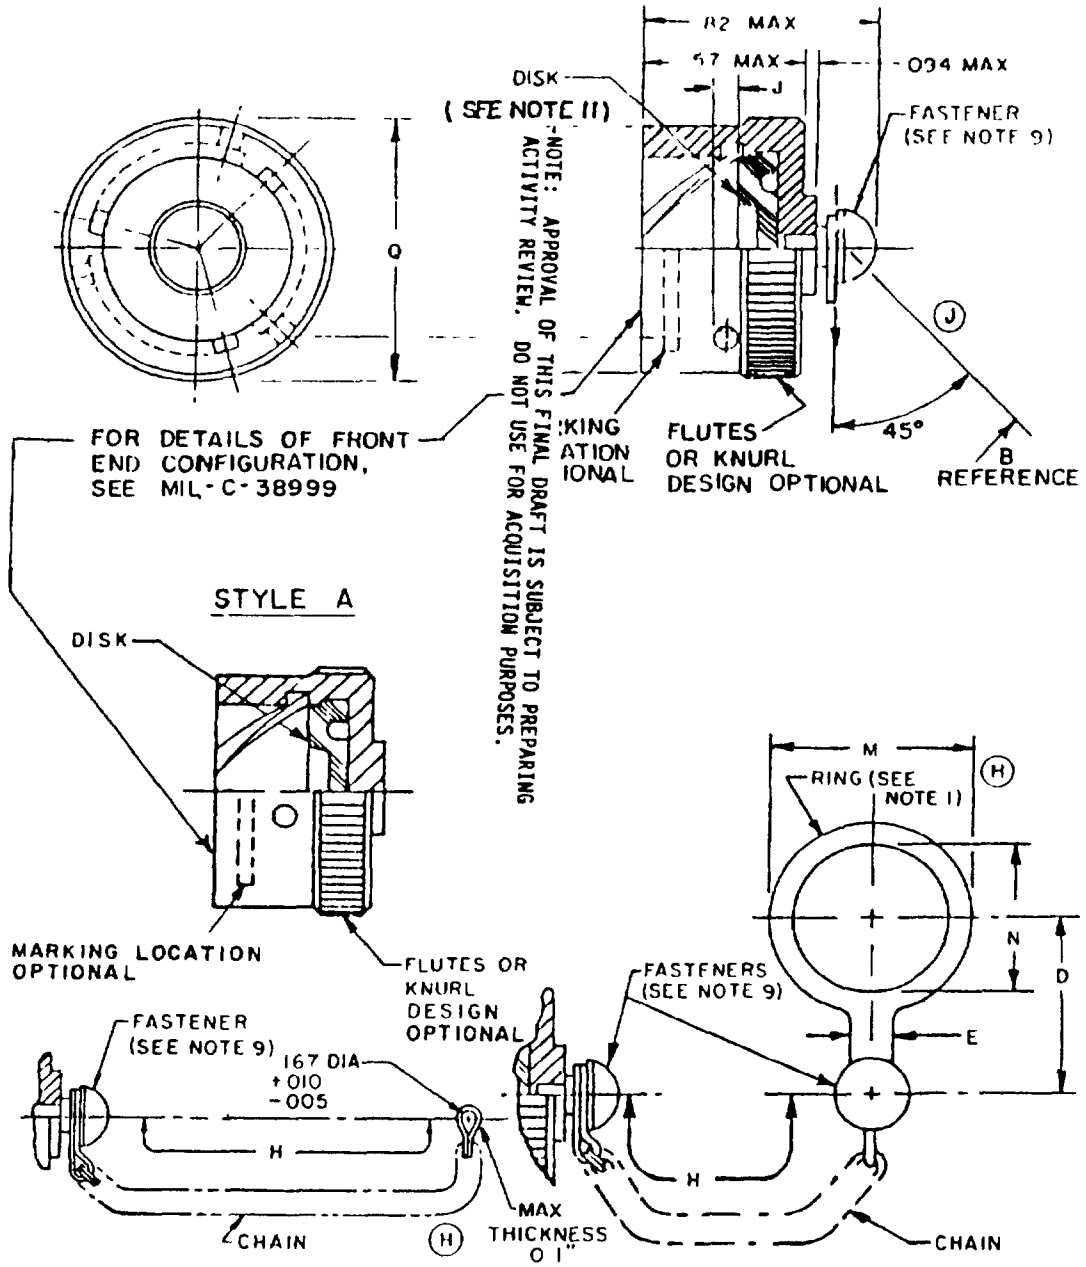

NOTE: APPROVAL OF THIS FINAL DRAFT IS SUBJECT TO PREPARING ACTIVITY REVIEW. DO NOT USE FOR ACQUISITION PURPOSES.

(J) denotes changes

APPROVED 18 Mar 68 — REVISED (E) 18 Feb 77 (F) 12 Sep 80 (G) 15 May 81 (H) 5 Oct 84 (J) 31 MAR 88

User activities: Army - Navy - Air Force -

Review activities: Army - MI, AR; Navy - EC, MC, OS; Air Force - 15, 99; DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A AF - 85 Other Cust Army - CR Navy - AS	International interest	TITLE COVER, ELECTRICAL CONNECTOR, PROTECTIVE, RECEPTACLE, BAYONET COUPLING, SERIES II	MILITARY STANDARD MS27511
Procurement Specification MIL-C-38999		SUPERSEDES	PAGE 1 OF 3

DD FORM 1 MAY 72 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


5935-3613-04

AMSC N/A

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

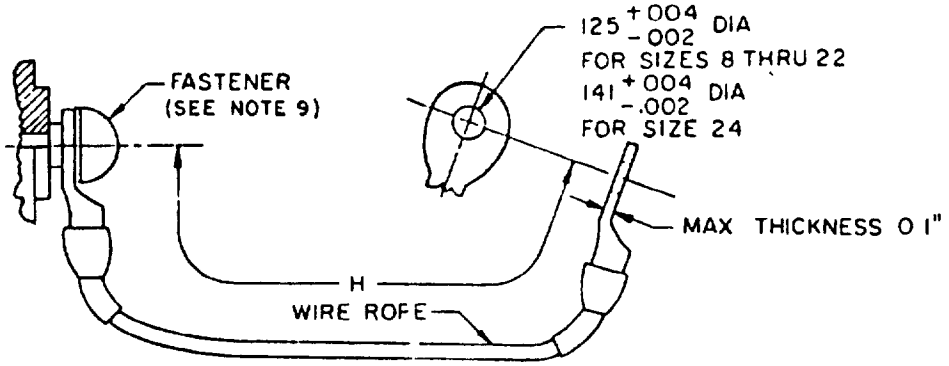

STYLE R

A Max dia	Q Max dia	Shell size	D		H +.50, -.25 Standard chain or rope length	E Min ring throat	M Max dia	N Max dia	J ± 015
			Max	Min					
630	.750	8	1.13	.80	3.0		1.22	.89	
761	859	10	1.23	.93			1 42	1.01	
.936	1.031	12	1.29	.99	3.5		1 55	1.14	
1.074	1 156	14	1.35	1 05			1.68	1.26	
1.172	1.281	16	1.41	1.11		.23	1.80	1.39	.082
1.304	1.406	18	1.47	1.18			1.92	1.51	
1.435	1.531	20	1.54	1.24	4.0		2 05	1.64	
1.560	1.641	22	1.60	1.30			2.18	1.76	
1.688	1.766	24	1.66	1.36			2.30	1.89	.107

For changes see pages 1, 2, and 3

J

REVISED

APPROVED 18 Mar 68

User activities Army -
Navy -
Air Force -

Review activities Army - MI, AR
Navy - EC, MC, OS
Air Force - 15, 99
DLA - ES

Selection for all new engineering and design applic ons

Department of Defense and for repetitive use shall be made from this document when applicable


P A AF - 85 Other Cust Army - CR Navy - AS	International interest	TITLE COVER, ELECTRICAL CONNECTOR, PROTECTIVE, RECEPTACLE, BAYONET COUPLING, SERIES II	MILITARY STANDARD MS27511
Procurement Specification MIL-C-38999		SUPERSEDES	PAGE 2 OF 3

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

Example of part number

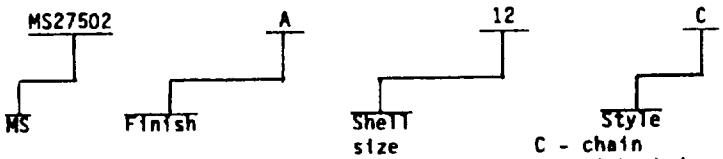

C - chain
N - With chain and ring
R - Rope
A - Without chain or rope

L - 5 inch chain in lieu of standard length. Leave blank for standard length Applicable to chain only. Not applicable to style R.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.57	14.5	1.11	28.2	1.36	34.5	1.66	42.2
.004	0.10	.630	16.00	1.13	28.7	1.39	35.3	1.68	42.7
.005	0.13	.750	19.05	1.14	29.0	1.406	35.71	1.688	42.87
.010	0.25	.761	19.33	1.156	29.36	1.41	35.8	1.76	44.7
.015	0.38	.80	20.3	1.172	29.77	1.42	36.1	1.766	44.86
.030	0.76	.82	20.8	1.18	30.0	1.435	36.45	1.80	45.7
.094	2.39	.859	21.82	1.22	31.0	1.47	37.3	1.89	48.0
.107	2.72	.89	22.6	1.23	31.2	1.51	38.4	1.92	48.8
.1	3.	.93	23.6	1.24	31.5	1.531	38.90	2.05	52.1
.125	3.18	.936	23.77	1.26	32.0	1.54	39.1	2.18	55.4
.141	3.58	.99	25.1	1.281	32.54	1.55	39.4	2.30	58.4
.167	4.24	1.01	25.7	1.29	32.8	1.560	39.62	3.00	76.2
.23	5.8	1.031	26.19	1.30	33.0	1.60	40.6	3.50	88.9
.25	6.4	1.05	26.7	1.304	33.12	1.64	41.7	4.00	101.6
.50	12.7	1.074	27.28	1.35	34.3	1.641	41.68		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Material: Ring Stainless steel passivated, 030 maximum thickness
   Cover Silicone elastomer.
   Disk Silicone elastomer.
   Chain Stainless steel, passivated, conforming to RR-C-271, type II, class 3.
   Wire rope Insulated, braided steel wire.
   Fastener Stainless steel, passivated
4. Finish See MIL-C-38999.
5. Applicable connectors: MIL-C-27599 series II and MIL-C-38999 series II.
6. Requirements: Eyelets shall be so crimped over wire rope as to ensure a breaking strength equal to or greater than that of the wire rope.
(J) 7. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence
(J) 8. Referenced Government documents of the issue listed in that issue of the Department Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein
9. The chain or rope assembly shall rotate freely on the cover fastner
(J) 10. The protective cover and rope assembly shall withstand a static tensile load of 35 pounds applied along the B reference line for 5 minutes.
11. Disk shall be bonded or mechanically retained
(J) 12. Not for space born applications.

APPROVED 18 Mar 68 REVISED (J) For changes see pages 1, 2, and 3

User activities: Army - Navy - Air Force -
Review activities: Army - MI, AR; Navy - EC, MC, OS; Air Force - 15, 99; DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A AF - 85 Other Cust Army - CR Navy - AS	International interest	TITLE COVER, ELECTRICAL CONNECTOR, PROTECTIVE, RECEPTACLE, BAYONET COUPLING, SERIES II	MILITARY STANDARD MS27511
Procurement Specification MIL-C-38999		SUPERSEDES	PAGE 3 OF 3

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.