
FED. SUP CLASS.
4820

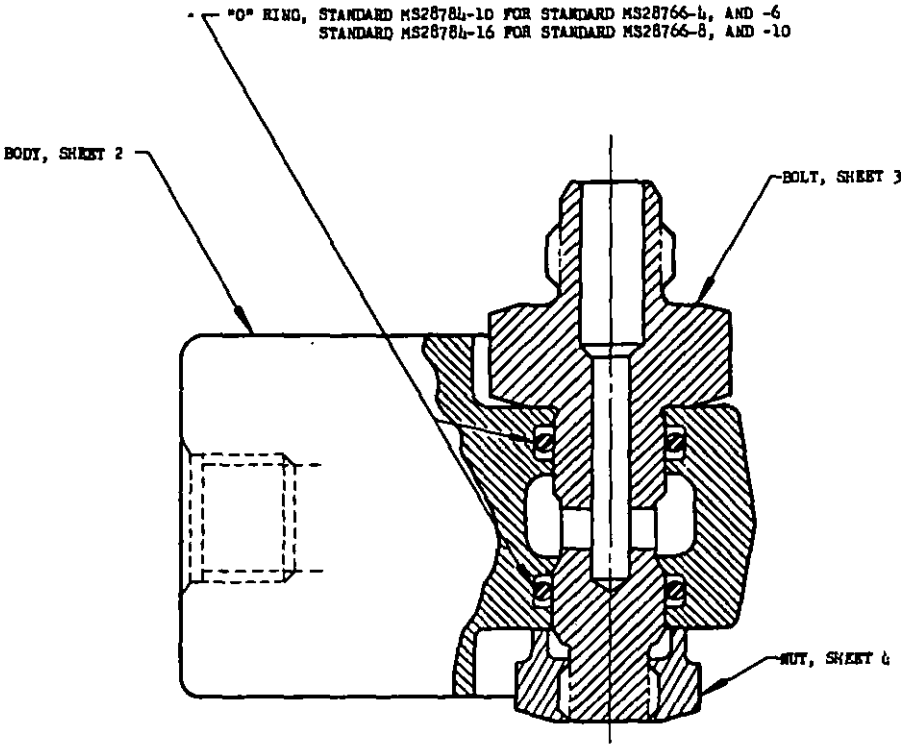

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS DOCUMENT *HAS BEEN PROMULGATED BY THE* DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 13 Sep 55 REVISED (A) 30 Apr 57

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS28766 (ASG)
Navy - BuAer *Air Force*	A - N - AF -	VALVE, SHUTTLE, HYDRAULIC, DIRECT MOUNTING, 3,000 PSI, TYPE II SYSTEMS	
PROCUREMENT SPECIFICATION MIL-V-19068		SUPERSEDES:	SHEET 1 OF 4

NOTICE. *When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:49Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PROCUREMENT SPECIFICATION MIL-V-19068

CUSTODIANS: Navy - Bu&Ships, Air Force
OTHER INT.: A - , N - , AF -

SUPERSEDES:


MILITARY STANDARD

VALVE, SHUTTLE, HYDRAULIC, DIRECT MOUNTING, 3,000 PSI, TYPE II SYSTEMS

MS28766 (ASG)

SHEET 2 OF 4

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

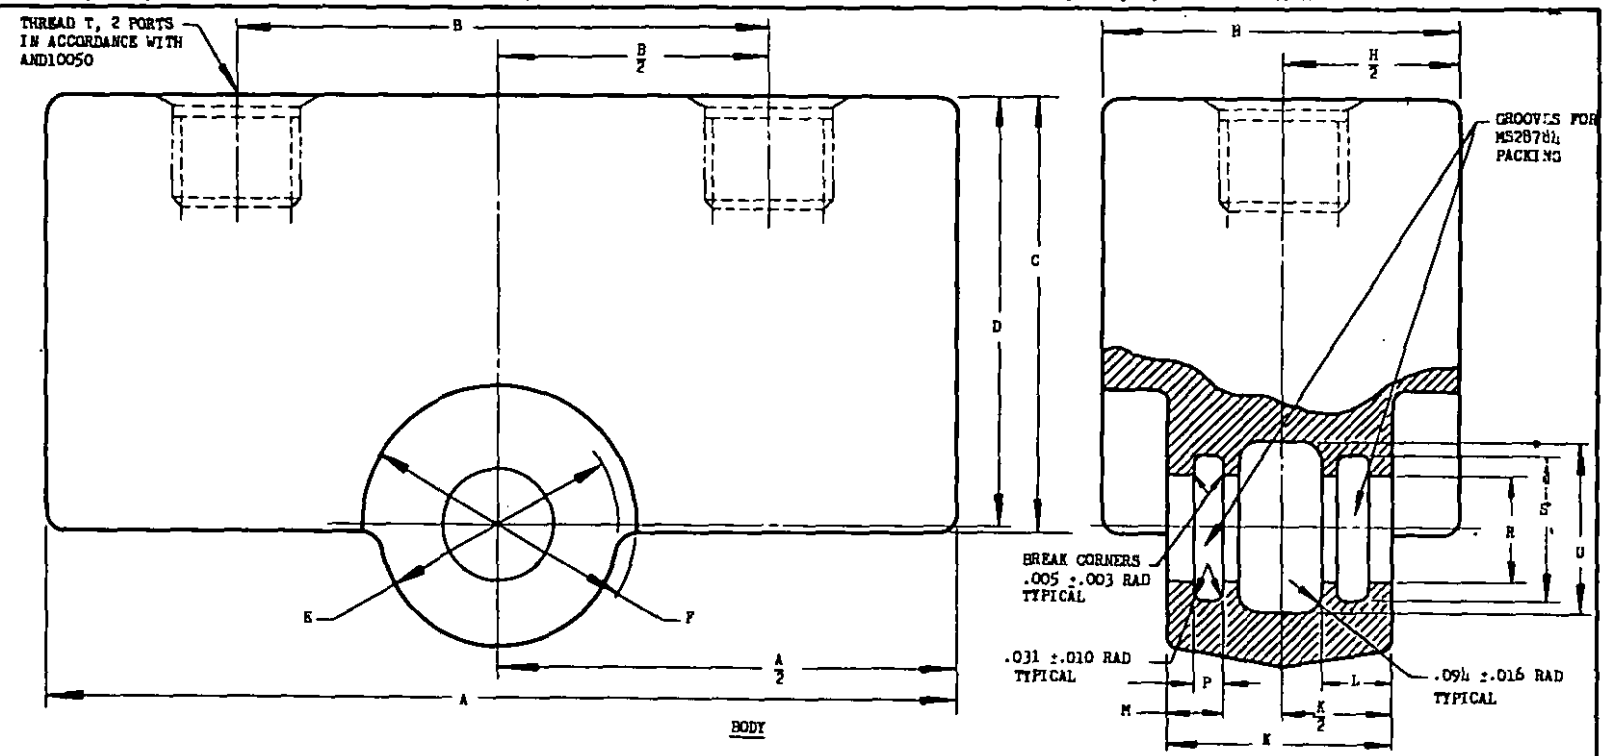

DASH NO.	FIIN	TUBE OD	THREAD T	A MAX	B ±.032	C MAX	D ±.032	E +.188 -.062 DIA	F ±.016 SF DIA	H MAX	K	L ±.010 TYP	M ±.007 TYP	P TYP	R ±.0005 DIA	S ±.004 DIA	U ±.010 DIA	RATED FLOW CAPACITY GPM
-4		1/4	7/16-20 UNF-3B	4.000	2.375	1.812	1.812	1.125	1.188	1.438	1.000	.312	.249	.143	.5000	.664	.797	1.22
-6		3/8	9/16-18 UNF-3B	4.188	2.438	1.969	1.937	1.125	1.250	1.625	1.000	.312	.249	.143	.5000	.664	.797	3.5
-8		1/2	3/4 -16 UNF-3B	5.625	3.375	2.531	2.437	1.625	1.750	2.000	1.187	.375	.283	.175	.8125	1.045	1.078	6.0
-10		5/8	7/8 -14 UNF-3B	5.625	3.375	2.531	2.437	1.625	1.750	2.000	1.187	.375	.283	.175	.8125	1.045	1.078	10.5

PROVIDE A LOCKWIRE HOLE CLEAR OF THE F DIA AND BOSS SURFACES.

OUTLINE AS SHOWN IS MAX AND NOT RESTRICTIVE AS TO DESIGN BUT LOCATION OF PORTS MUST BE MAINTAINED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.


FED. SUP. CLASS. 1680

APPROVED 13 Sep 55 REVISED (A) 30 Apr 57

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:08:27
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS. 4820

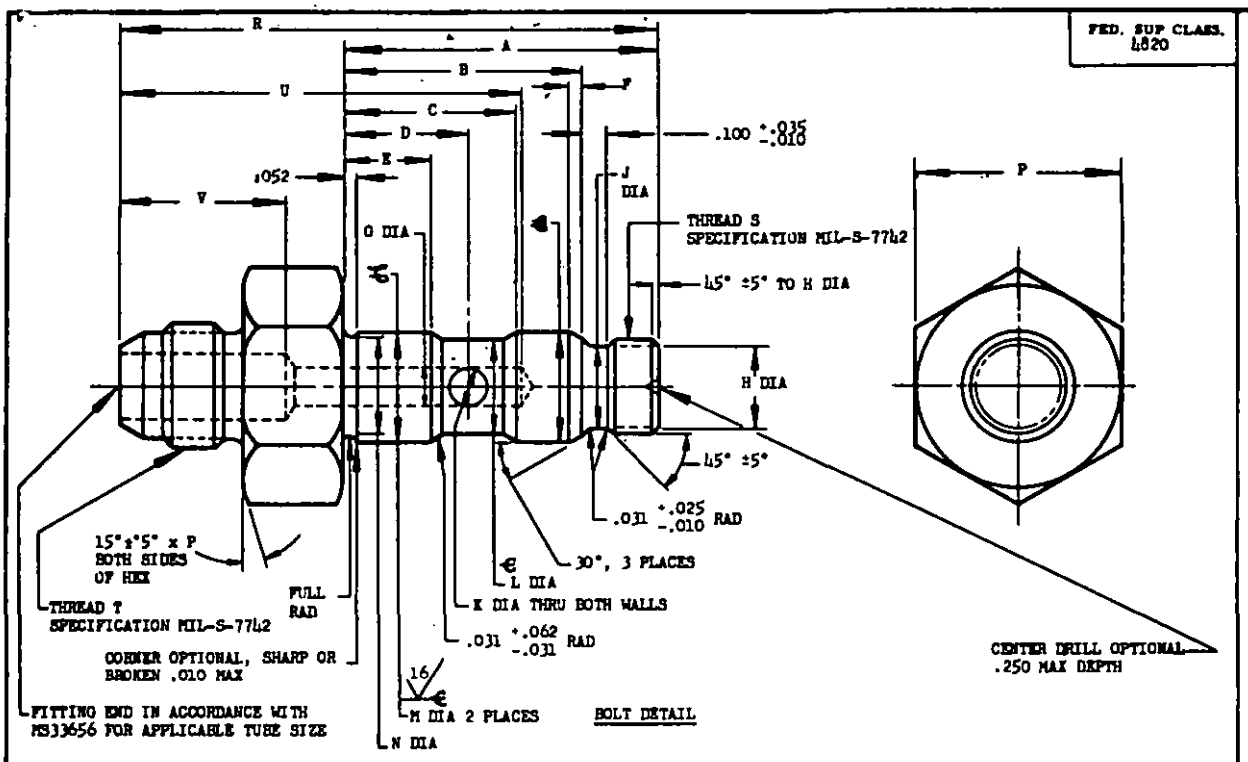

DASH NO.	FIIN	TUBE OD	THREAD S	THREAD T	A ±.031	B	C	D	E	F ±.010	G ±.003
-4		1/4	7/16-20 UNF-3A	7/16-20 UNF-3A	1.438	1.087	.726	.560	.354	.060	.172
-6		3/8		9/16-18 UNF-3A							.203
-8		1/2	9/16-18 UNF-3A	3/4 -16 UNF-3A	1.688	1.274	.891	.634	.377	.065	.391
-10		5/8		7/8 -14 UNF-3A							.422

DASH NO.	H ±.005	J ±.005	K ±.003	L ±.005	M ±.0004	N	P ±.031	R	U ±.062	V ±.062
-4	.365	.363	.189	.433	.4989	.425	.688	2.332	1.750	—
-6							.875	2.431	1.812	.750
-8	.480	.480	.300	.740	.8114	.738	1.000	2.782	2.125	—
-10							1.125	2.883	2.188	.938

MATERIAL: ALUMINUM ALLOY, 2L5-T4 OR 145-T6.

ALL OUTSIDE MACHINED SURFACES 125, STANDARD MIL-STD-10.

ALL INSIDE SURFACES 250, STANDARD MIL-STD-10.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

DIAMETERS MARKED Ⓜ MUST BE CONCENTRIC WITHIN .005 FIR.

DIAMETERS MARKED Ⓜ MUST BE CONCENTRIC WITHIN .0005 FIR.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 13 Sep 55 REVISED (4) 30 Apr 57

CUSTODIANS	OTHER INT.
Navy - BuAer Air Force	A - N - AF -

MILITARY STANDARD

VALVE, SHUTTLE, HYDRAULIC, DIRECT MOUNTING, 3,000 PSI, TYPE II SYSTEMS


MS28766 (ASG)

PROCUREMENT SPECIFICATION MIL-V-19058

SUPERSEDES:

SHEET 3 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.

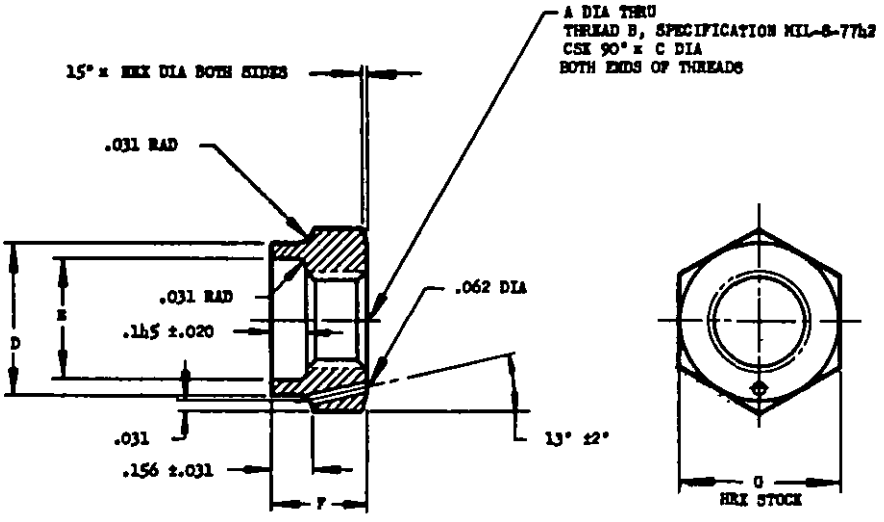

NUT

DASH NO.	FINISH	THREAD T	A DIA MAX	A DIA MIN	C DIA	D DIA	E DIA	F ±.031	G ±.031
-4		7/16-20 UNF-3B	.3916	.3834	.437	.687	.562	.406	.688
-6									
-8		9/16-18 UNF-3B	.5106	.5024	.562	1.000	.875	.500	1.000
-10									

MATERIAL: ALUMINUM ALLOY, 2L8T4 OR 14S76.

ALL MACHINED SURFACES 125√, STANDARD MIL-STD-10.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 13 Sep 55 REVISED (A) 30 Apr 57

CUSTODIANS	OTHER INT.
Navy - BuAer	A -
Air Force	N -
	AF -

MILITARY STANDARD

VALVE, SHUTTLE, HYDRAULIC, DIRECT MOUNTING, 3,000 PSI, TYPE II SYSTEMS

MS28766 (ASG)

PROCUREMENT SPECIFICATION MIL-V-19060

SUPERSEDES:

SHEET 4 OF 4

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.