INCH-POUND

MS3128L
15 January 2015
SUPERSEDING
MS3128K
29 April 2009


DETAIL SPECIFICATION SHEET

# CONNECTORS, RECEPTACLE, ELECTRICAL, CRIMP TYPE, WALL MOUNTING, NO. 4/6 HOLES, BAYONET COUPLING, SERIES 1, CLASSES E, F and P

Inactive for new design after 15 February 1965.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

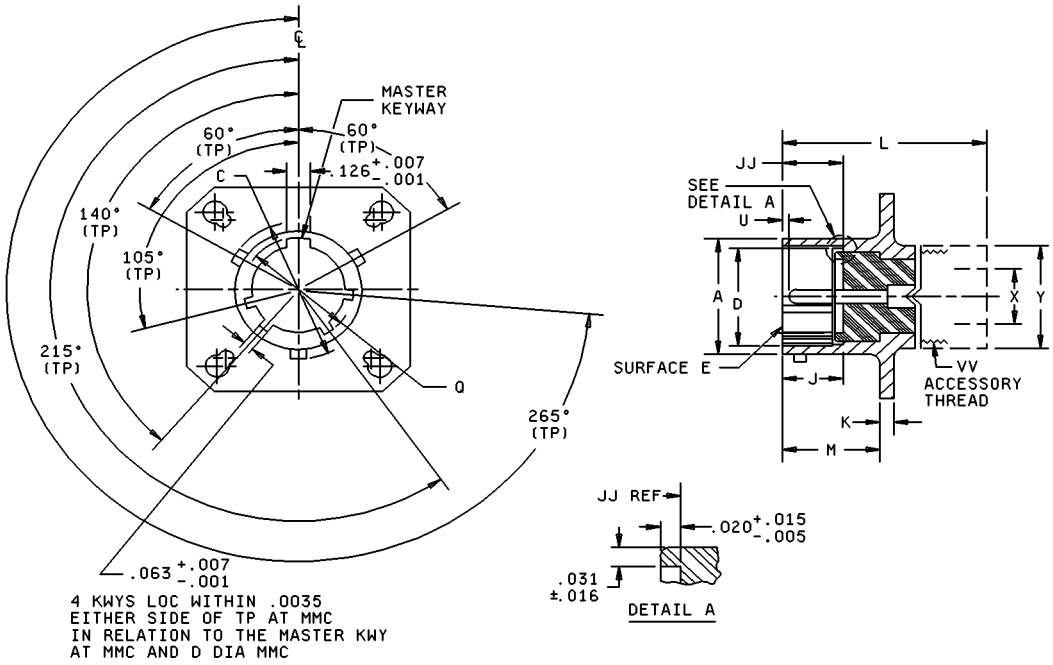


PIN INSERT

FIGURE 1. Receptacle, dimensions, classes E, F and P.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

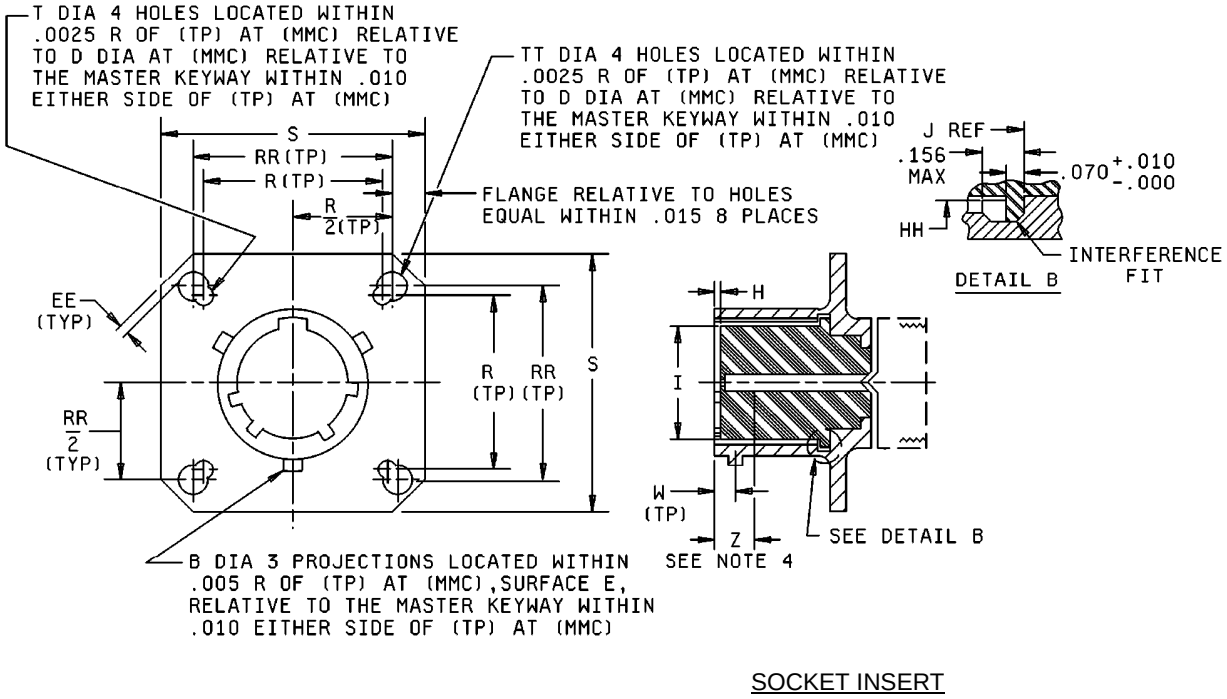



FIGURE 1. Receptacle, dimensions, classes E, F and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

| Shell size | A dia -.005 +.001 OD | B +.016 -.001 | C dia +.000 -.016 over projection | D dia +.005 -.001 ID | EE min edge distance | H +.000 -.020 socket insert location |
|---|---|---|---|---|---|---|
| 10 | .590 (14.99) | .078 (1.98) | .680 (17.27) | .490 (12.45) | .035 (0.89) | .025 (0.64) |
| 12 | .750 (19.05) | | .859 (21.82) | .607 (15.42) | | |
| 14 | .875 (22.23) | | .984 (24.99) | .732 (18.59) | | |
| 16 | 1.000 (25.40) | | 1.108 (28.14) | .857 (21.77) | | |
| 18 | 1.125 (28.58) | | 1.233 (31.32) | .962 (24.43) | | |
| 20 | 1.250 (31.75) | | 1.358 (34.49) | 1.087 (27.61) | .050 (1.27) | .087 (2.21) |
| 22 | 1.375 (34.93) | | 1.483 (37.67) | 1.212 (30.78) | | |
| 24 | 1.500 (38.10) | .125 (3.18) | 1.610 (40.89) | 1.337 (33.96) | | |

| Shell size | I dia max insert | J ±.010 | JJ -.020 +.000 pin insert location | K ±.016 thick mounting flange | JJ -.020 +.000 pin insert location | Q dia -.006 +.005 | R (TP) mounting |
|---|---|---|---|---|---|---|---|
| 10 | .402 (10.21) | .382 (9.70) | .332 (8.43) | .062 (1.57) | .462 (11.73) | .540 (13.72) | .719 (18.26) |
| 12 | .516 (13.11) | | | | | .659 (16.74) | .812 (20.62) |
| 14 | .641 (16.28) | | | | | .814 (20.68) | .906 (23.01) |
| 16 | .766 (19.46) | | | | | .939 (23.85) | .969 (24.61) |
| 18 | .855 (21.72) | | | | | 1.033 (26.24) | 1.062 (26.97) |
| 20 | .980 (24.89) | .444 (11.28) | .394 (10.01) | .094 (2.39) | .556 (14.12) | 1.164 (29.57) | 1.156 (29.36) |
| 22 | 1.105 (28.07) | | | | | 1.289 (32.74) | 1.250 (31.75) |
| 24 | 1.229 (31.22) | | | | .589 (14.96) | 1.414 (35.92) | 1.375 (34.93) |

FIGURE 1. Receptacle, dimensions, classes E, F and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.


| Shell size | RR (TP) mounting holes | S max length side | T ± .005 dia mounting holes | TT ± .005 dia mounting holes | V (TP) bay pin location |
|---|---|---|---|---|---|
| 10 | .812 (20.62) | 1.141 (28.98) | .120 (3.05) | .150 (3.81) | .085 (2.16) |
| 12 | .938 (23.83) | 1.266 (32.16) | | | |
| 14 | 1.031 (26.19) | 1.360 (34.54) | | | |
| 16 | 1.125 (28.58) | 1.453 (36.91) | | | |
| 18 | 1.203 (30.56) | 1.532 (38.91) | | | |
| 20 | 1.297 (32.94) | 1.688 (42.88) | | | .147 (3.73) |
| 22 | 1.375 (34.93) | 1.766 (44.86) | | | |
| 24 | 1.500 (38.10) | 1.891 (48.03) | .147 (3.73) | | |

| Shell size | Z (see note 4) - .000 + .028 socket contact spring location | V V thread class 2A | MM max ID gasket |
|---|---|---|---|
| 10 | .153 (3.89) | 9/16-24 | .457 (11.61) |
| 12 | | 11/16-24 | .564 (14.33) |
| 14 | | 13/16-20 | .689 (17.50) |
| 16 | | 15/16-20 | .814 (20.68) |
| 18 | | 1 1/16-18 | .907 (23.04) |
| 20 | .215 (5.46) | 1 3/16-18 | 1.039 (26.39) |
| 22 | | 1 5/16-18 | 1.164 (29.57) |
| 24 | | 1 7/16-18 | 1.289 (32.74) |

FIGURE 1. Receptacle, dimensions, classes E, F and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

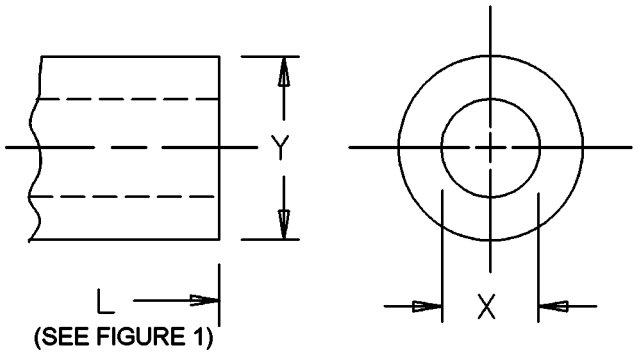



| Shell size | L max over-all length | X dia min ID | Y dia max OD |
|---|---|---|---|
| 10 | 1.552 (39.42) | .359 (9.12) | .730 (18.54) |
| 12 | | .469 (11.91) | .858 (21.79) |
| 14 | | .589 (14.96) | .954 (24.23) |
| 16 | | .717 (18.21) | 1.110 (28.19) |
| 18 | | .779 (19.79) | 1.244 (31.60) |
| 20 | 1.709 (43.41) | .901 (22.89) | 1.360 (34.54) |
| 22 | | 1.009 (25.63) | 1.404 (35.66) |
| 24 | | 1.123 (28.52) | 1.610 (40.89) |

CLASS E


FIGURE 1. Receptacle, dimensions, classes E, F and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

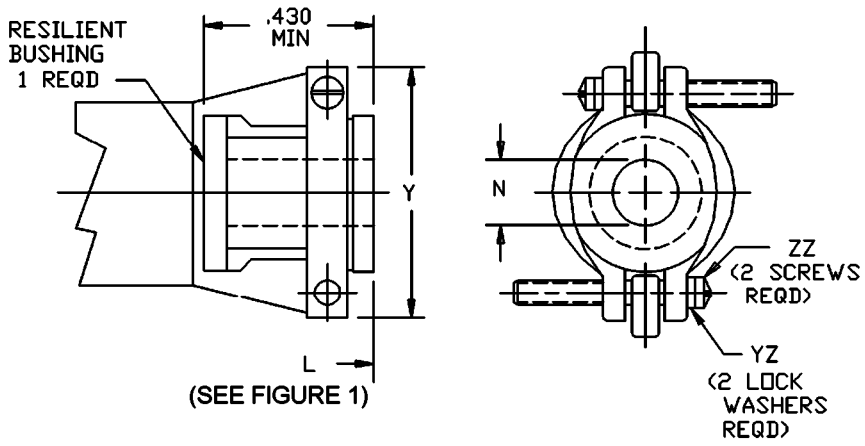


CLASS F, BUSHING INSTALLED

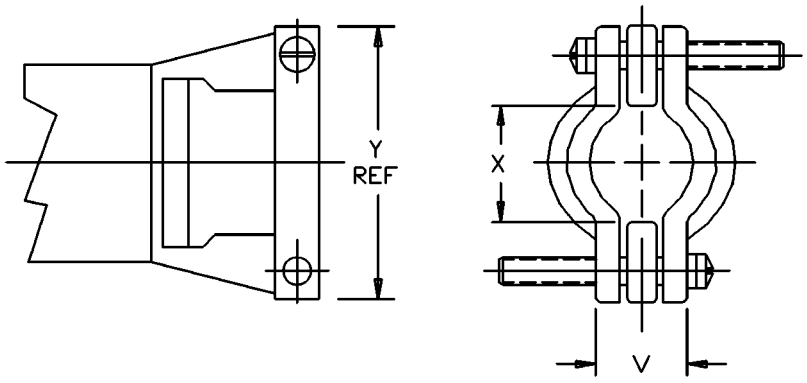


CLASS F, BUSHING REMOVED

FIGURE 1. Receptacle, dimensions, classes E, F and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

| Shell size | L max over-all length | X dia min open | Y max | V max closed |
|---|---|---|---|---|
| 10 | 2.422 (61.52) | .297 (7.54) | .891 (22.63) | .187 (4.75) |
| 12 | | .422 (10.72) | 1.016 (25.81) | .281 (7.14) |
| 14 | | .547 (13.89) | 1.141 (28.98) | .325 (8.26) |
| 16 | 2.537 (64.44) | .609 (15.47) | 1.203 (30.56) | .356 (9.04) |
| 18 | | | | .456 (11.58) |
| 20 | 2.824 (71.73) | .734 (18.64) | 1.469 (37.31) | |
| 22 | | .922 (23.42) | 1.656 (42.06) | .519 (13.18) |
| 24 | 2.900 (73.66) | .984 (24.99) | 1.750 (44.45) | .657 (16.69) |


| Shell size | N (see note 6) free dia ± .010 | ZZ screw threads | YZ (see note 7) lock washers NASM35338 or NASM35333 |
|---|---|---|---|
| 10 | .188 (4.78) | 6-32 UNC | NASM35338 - 98 or -41<br>NASM35333 -105 or -37 |
| 12 | .312 (7.92) | | |
| 14 | .373 (9.47) | | |
| 16 | .500 (12.70) | | |
| 18 | .625 (15.88) | 8-32 UNC | NASM35338 -99 or -42<br>NASM35333 -106 or -38 |
| 20 | | | |
| 22 | .750 (19.05) | | |
| 24 | .800 (20.32) | | |

CLASS F

FIGURE 1. Receptacle, dimensions, classes E, F and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

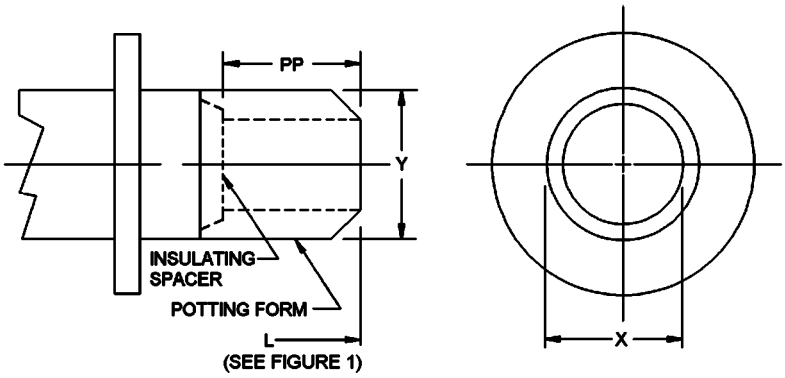


| Shell size | L max over-all length | X dia min | Y dia max | PP min |
|---|---|---|---|---|
| 10 | 1.750 | .434 | .734 | .250 |
| 12 | | .548 | .858 | |
| 14 | | .673 | .984 | |
| 16 | | .798 | 1.110 | |
| 18 | | .899 | 1.234 | |
| 20 | 1.892 | 1.024 | 1.360 | |
| 22 | | 1.149 | 1.484 | |
| 24 | 1.953 | 1.274 | 1.610 | |

CLASS P

NOTES:

1. Dimensions are in inches.
2. Angle tolerance is +/- 1/2°.
3. Metric equivalents are given for general information only.
4. Distance between end of shell and the point at which a gage pin having the same basic diameter as the mating contact and a square face first engages socket contact spring.
5. True position (TP) tolerances specified are in accordance with ASME Y14.5.
6. For class F: Use SAE-AS/85049/139 bushing if reduced opening is required.
7. For class F: Lockwashers may be captivated.

FIGURE 1. Receptacle, dimensions, classes E, F and P - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

This connector mates with MS3126.

Insert arrangements shall be in accordance with MIL-STD-1669.

Connector accessories: See SAE-AS85049.


Packing material shall meet the requirements of ASTM-D2000.

Finishes: A finish designator shall not be included in the PIN when finish W is required. See MIL-DTL-26482 for alternative finishes D, T and K for classes E, F and P.

Material:

a. Shell - aluminum alloy.
b. Bayonet pins (B dia) - stainless steel, passivated.

Part or Identifying Number (PIN) example:

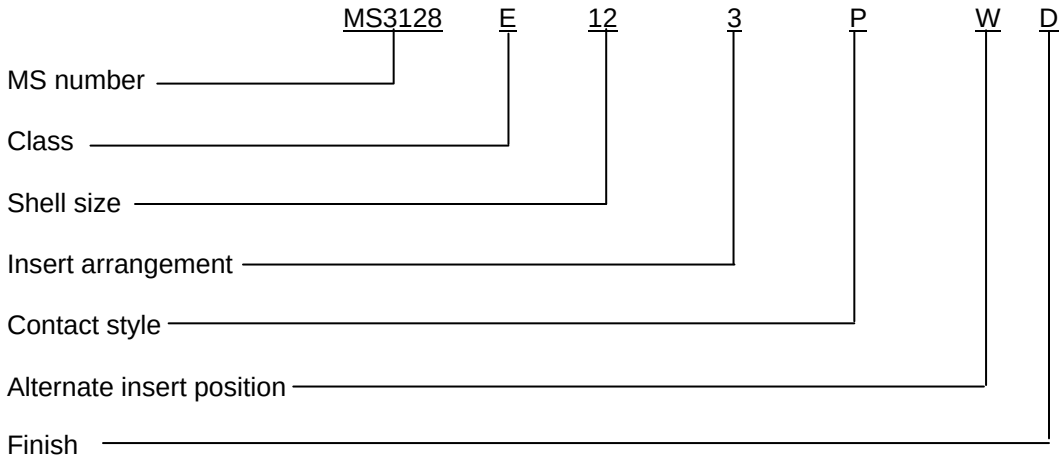


Note: When finish W is required, no finish designator is used (class W is the default finish).

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3126
MIL-STD-1669
SAE-AS85049
SAE-AS85049/139
ASTM-D2000
ASME Y14.5
NASM35333
NASM35338

## CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2015-036)

Review activities:
Army - MI
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.