FED. SUP CLASS
5305

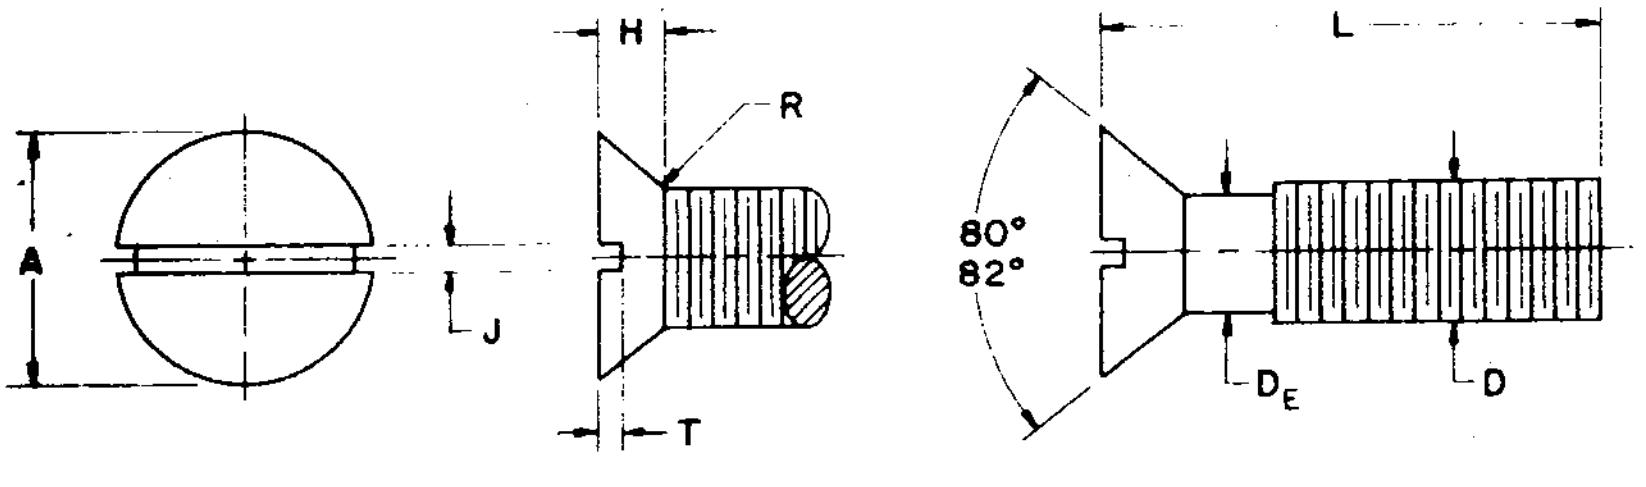

· FULL HEAD

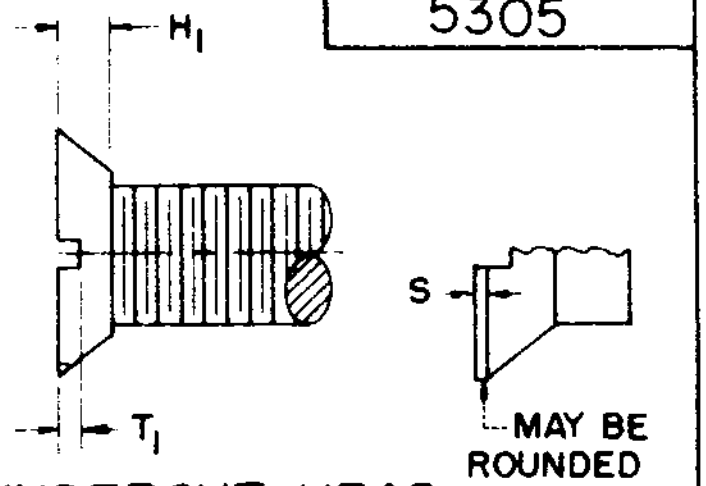

UNDERCUT HEAD

NOMINAL SIZE			[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	1/4 (.2500)
THREADS PER INCH			80NF	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	UNF
BODY DIAMETER	D_E	Max Min	[illegible]	[illegible] [illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
HEAD DIAMETER	A	Max Sharp Min Sharp Abs Min	[illegible] .108 [illegible]	[illegible] [illegible] [illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
SLOT WIDTH	J	Max Min	.023 [illegible]	[illegible] [illegible]	.031 .023	[illegible] .031	.048 .039	.054 [illegible]	.060 [illegible]	[illegible]
FLAT		Max	.002	.003	.003	.004	.005	[illegible]	.007	[illegible]
RADIUS	R	Max	.025	.027	.031	.041	.050	[illegible]	[illegible]	[illegible]
FULL HEAD — HEAD HEIGHT	H	Max Min	.035 .025	.043 .033	[illegible] .040	[illegible]	.083 [illegible]	.100 [illegible]	[illegible] .098	.153 .131
FULL HEAD — SLOT DEPTH	T	Max Min	.015 .010	[illegible] .012	.023 .015	.030 .020	.038 .024	.045 .029	.053 .034	[illegible] .048
UNDERCUT HEAD — HEAD HEIGHT	H_1	Max Min	.026 .017	[illegible]	.037 .028	[illegible]	[illegible]	.071 .055	[illegible]	[illegible] .087
UNDERCUT HEAD — SLOT DEPTH	T_1	Max Min	.012 .010	.016 .012	[illegible] .015	.025 .020	.032 [illegible]	[illegible] .029	[illegible] .034	[illegible]

Length I	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
1/8	+0 -1/32	1	6	13	22	33	48		
3/16		2		14	23	34	49	67	
1/4		3		15	24	35	50	68	85
5/16		4		16	25	36	51	69	86
3/8		5	10	17	26	37	52	70	87
7/16			11	18	27	38	53	71	88
1/2			12	19	28	39	54	72	89
5/8				20	29	40	55	73	90
3/4				21	30	41	56	74	91
7/8					31	42	57	75	92
1					32	43	58	76	93
1-1/4	+0 -1/16					44	59	77	94
1-1/2						45	60	78	95
1-3/4						46	61	79	96
2						47	62	80	97
2-1/4	+0 -3/32						63	81	98
2-1/2							64	82	99
2-3/4							65	83	100
3							66	84	101

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

Minimum complete thread length of 1-3/4.

Ⓐ CANCELLED
SEE SHEET 2

MATERIAL: Brass, Specification QQ-B-611 or QQ-W-321.
FINISH: Black Oxide, Specification JAN-F-495, type III.
THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.
NOTES:
(1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS35248-1.
(4) Sizes above dotted line have undercut head.
(5) All dimensions in inches.

Ⓐ For changes see sheets 1 and 2

APPROVED FEB 9, 1954
REVISED Ⓐ 25 MARCH 63

P.A.
Other Cust
WC
Ships
MOAMA

TITLE
SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, BRASS, BLACK OXIDE FINISH, NF-2A AND UNF-2A

MILITARY STANDARD
MS 35248

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T17:12Z
Check the source to verify that this is the current version before use.

NOTICE.--When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS
5305

NOMINAL SIZE	D		5/16 (.3125)	3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)
THREADS PER INCH			24UNF	24UNF	20UNF	20UNF	18UNF	18UNF	16UNF
BODY DIAMETER	D_E	Max	.3125	.3750	.4375	.5000	.5625	.6250	.7500
		Min	.2806	.3430	.3995	.4619	.5205	.5828	.7029
HEAD DIAMETER	A	Max Sharp	.635	.762	.812	.875	1.000	1.125	1.375
		Min Sharp	.600	.722	.771	.831	.950	1.069	1.306
		Abs Min	.581	.706	.743	.802	.919	1.035	1.267
SLOT WIDTH	J	Max	.084	.094	.094	.106	.118	.133	.149
		Min	.072	.081	.081	.091	.102	.116	.131
FLAT	F	Max	.011	.013	.016	.018	.020	.023	.027
RADIUS	R	Max	.083	.083	.100	.100	.110	.110	.125
FULL HEAD HEAD HEIGHT	H	Max	.191	.230	.223	.223	.260	.298	.372
		Min	.164	.200	.196	.186	.220	.253	.319
FULL HEAD SLOT DEPTH	T	Max	.088	.106	.103	.103	.120	.137	.171
		Min	.058	.070	.066	.065	.077	.088	.111
UNDERCUT HEAD HEAD HEIGHT	H_1	Max	.135	.162	.156	.160	.185	.212	.264
		Min	.106	.132	.126	.123	.145	.167	.211
UNDERCUT HEAD SLOT DEPTH	T_1	Max	.073	.088	.085	.085	.100	.114	.142
		Min	.058	.070	.066	.065	.077	.088	.111

Ⓐ CANCELLED
SEE NOTE

	Length L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/8	+0 -1/32							
	3/16								
	1/4								
	5/16								
	3/8		102						
	7/16		103						
	1/2		104	117					
	5/8		105	118	130				
	3/4		106	119	131	142			
	7/8		107	120	132	143	153	163	
	1		108	121	133	144	154	164	173
	1-1/4	+0 -1/16	109	122	134	145	155	165	174
	1-1/2		110	123	135	146	156	166	175
	1-3/4		111	124	136	147	157	167	176
	2		112	125	137	148	158	168	177
Minimum complete thread length of 1-3/4.	2-1/4	+0 -3/32	113	126	138	149	159	169	178
	2-1/2		114	127	139	150	160	170	179
	2-3/4		115	128	140	151	161	171	180
	3		116	129	141	152	162	172	181

NOTE: For illustration, material, finish, and other pertinent data, see sheet 1.

Ⓐ **CANCELLED** AFTER 25 Mar 63 USE MS 35199 . INTERCHANGEABILITY RELATIONSHIP-MS 35199 can replace the cancelled screws of the same size. The cancelled MS 35248 cannot always replace MS 35199 and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

APPROVED FEB 9, 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2.

P.A. WC
Other Cust Ships MOAMA

TITLE
SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, BRASS, BLACK OXIDE FINISH, NF-2A AND UNF-2A.

MILITARY STANDARD
MS 35248

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

SHEET 2 OF

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.