



FED. SUP CLASS
2320

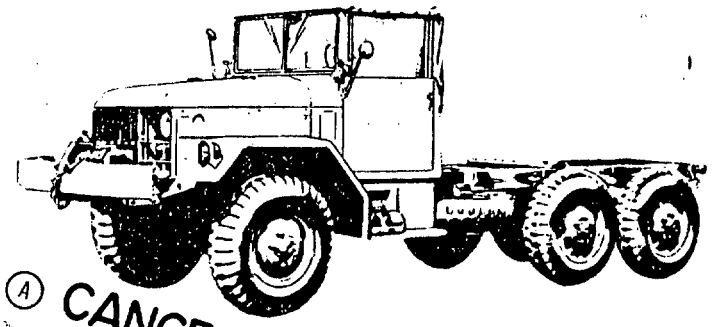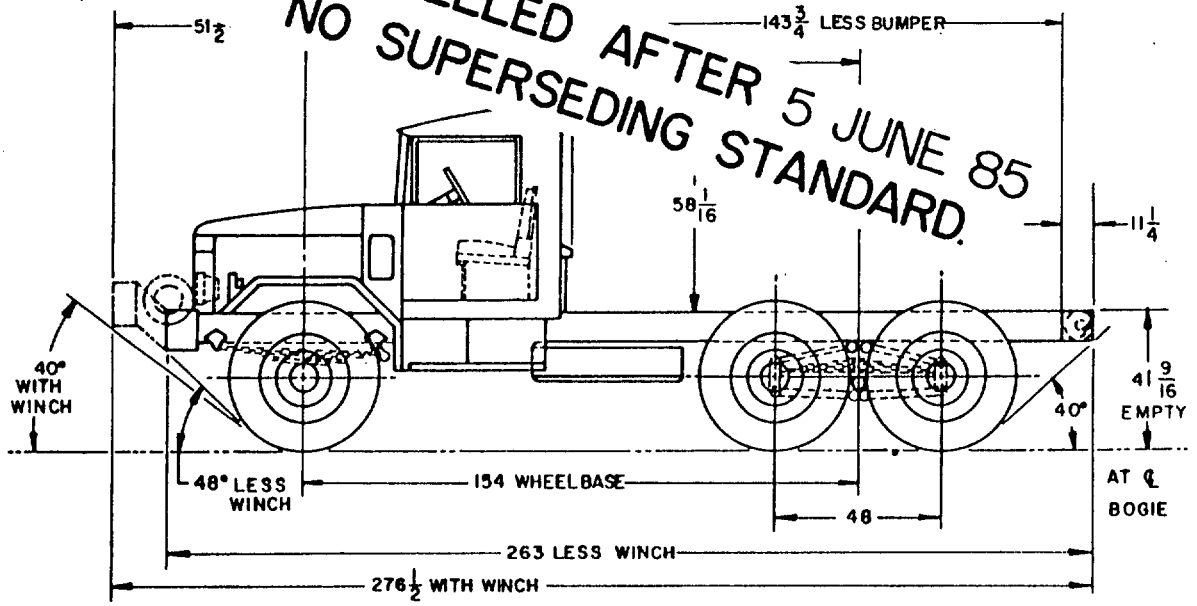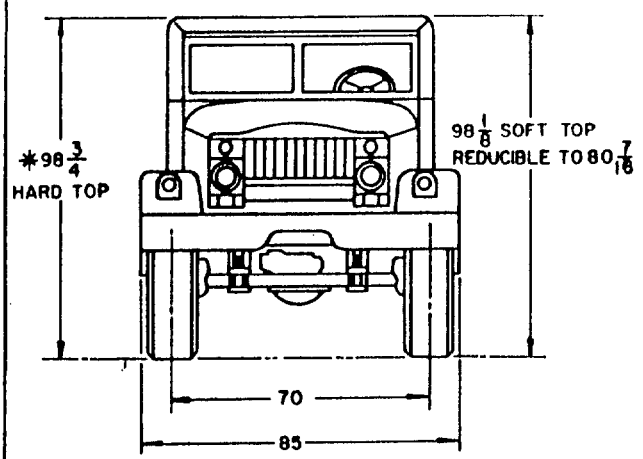

(A) CANCELLED AFTER 5 JUNE 85
NO SUPERSEDING STANDARD.

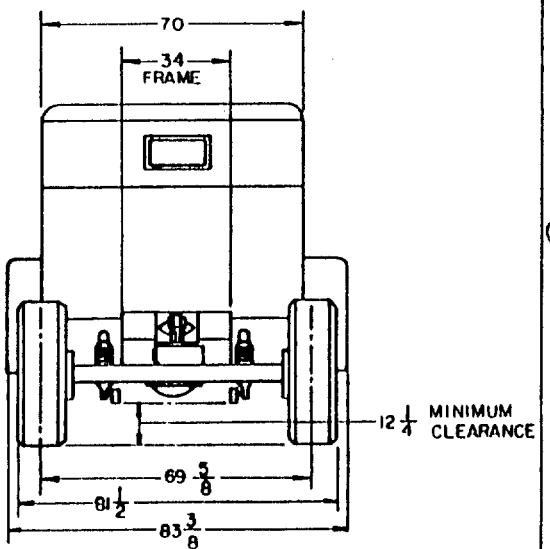


DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

| MS PART NO. | ENGINEERING PARTS LIST | |
|---|---|---|
| MS500017-1 | 8358199 | WITH WINCH |
| MS500017-2 | 7368578 | LESS WINCH |

REVIEW ACTIVITIES: AF-85
USER ACTIVITIES: ARMY-EL; NAVY-YD; AF-26

APPROVED 2 NOV 65 REVISED (A) 5 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

| | | |
|---|---|---|
| P.A. MO (ATAC)<br>Other Cust<br>NAVY—MC<br>AF-84 | TITLE<br>CHASSIS, TRUCK, MILITARY DESIGN, M44, 2-1/2 TON, 6X6, 154 INCH WHEELBASE | MILITARY STANDARD<br>MS500017 |
| PROCUREMENT SPECIFICATION<br>MIL-T-45362 | SUPERSEDES: | SHEET 1 OF 2 |

DD FORM 1 SEP 67 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23120:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

# VEHICLE CHARACTERISTICS

CURB WEIGHT: CHASSIS AND CAB, LESS PAYLOAD AND PERSONNEL.

| | W/O/W | W/W |
|---|---|---|
| FRONT AXLE | 5210 | 5710 |
| BOGIE | 4630 | 4540 |
| TOTAL | 9840 | 10250 LBS. |

GROSS LOAD:

PAYLOAD
CROSS COUNTRY 5000
HIGHWAY 10000 LBS.

TOWED LOAD MAX:

CROSS COUNTRY 6000
HIGHWAY 10000 LBS.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

ENGINE: 8757517

MODEL: OA 331
NO. OF CYL: SIX IN LINE
DISPLACEMENT: 331, BORE: 4-1/8
STROKE: 4-1/8
COMP. RATIO: 6.73:1
GOV. SPEED: 3400 RPM.
MAX. BHP: 146 NET 127 AT 3400 RPM.
MAX. TORQUE LB. FT: 270 NET 248 AT 1400 RPM.

POWERPLANT: INST'N. 10871525 W/O/W
10872219 W/W

TRANSMISSION ASSY: 7520995

TYPE: SYNCHROMESH
FORWARD SPEEDS: (5) REVERSE (1)
GEAR RATIO: HIGH 1.00:1 7.36:1
FOURTH 1.45:1
LOW 7.55:1

TRANSFER TRANSMISSION: P/N 10871782

GEAR RATIO: HIGH 1.00:1
LOW 1.98:1

TRANSFER TRANSMISSION: INST'N. 8757844

FRONT SUSPENSION: INST'N. 8757839

| | | |
|---|---|---|
| FRONT AXLE | | 7521734 |
| FRONT SPRINGS | (2) | 7368628 |
| SHOCK ABSORBERS | (2) | 7539007 |

REAR SUSPENSION: INST'N. 8344183

| | | |
|---|---|---|
| REAR AXLE | (2) | 7521727 |
| REAR SPRINGS | (2) | 7521792 |
| TORQUE ROD ASSY. | (6) | 8757685 |

FRAME ASSY: 7521806

SIDE RAIL: 8 x 3 x 5/16
SECTION MODULUS: 9.54 $IN^3$

TIE DOWNS: NO. W/W (12) 7373215
LOCATION: 6 EACH SIDE

WHEELS: (6), MS 53044-4
SIZE: 7.5 x 20, OFFSET 5-1/8

PINTLE: INST'N. 7722050
PINTLE: MS 51118-1

TIRES: (6) PLUS (1) SPARE, MS 35388-21
SIZE: 11.00 x 20, 8 PLY, NDCC.

TUBES: MS 35392-15

CAB ASSY: SOFT TOP 8757744

ELECTRICAL SYSTEM: INST'N 10896754-1

| | | |
|---|---|---|
| POTENTIAL: | | 24 VOLT |
| BATTERIES: | | 2, 12 VOLT, 6TN MS 35000 |
| STARTING MOTOR: | | 7762618 |
| GENERATOR 25 AMP | | 7355736 |
| COIL: | | 7762685 |
| REGULATOR: | | MS 51356-1 |
| B.O. DRIVING LAMP | | MS 51318 |
| B.O. MARKER LAMP | | MS 53047 |
| STOPLIGHT, TAIL: | (2) | MS 51329-1 |
| STOPLIGHT, B.O.: | (1) | MS 51302-1 |

REFLECTORS:
4 RED, MS 35387-1
4 AMBER, MS 35387-2

BRAKE: SERVICE, INST'N. 8757651
HUB & DRUM ASSYS.

FRONT, LH. 7529053 RH. 7529054
REAR, LH. 7529049 RH. 7529050
DRUM SIZE, FRT. 15 x 3 REAR 15 x 3
BRAKE, PARKING, SIZE: 14 x 3
ACTUATION: AIR/HYDRAULIC
HAND BRAKE, INST'N. 10871530

STEERING: INST'N. 8757840

WINCH: INST'N. 10871532

WINCH: MS 51352-1
10000 LB. CAPACITY

PERFORMANCE: LOADED,

CRUISING RANGE, HIGHWAY 224 MILES
MAX. SPEED, HIGHWAY 58 MPH.

FORDING DEPTH:

FORDING DEPTH W/O KIT, 40 IN
FORDING DEPTH W/KIT, 72 IN

MISCELLANEOUS EQUIPMENT:

CLOSURE, HARDTOP 7354276

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.)

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.)

THIS VEHICLE SHALL BE IN ACCORDANCE WITH DRAWINGS IN REFERENCED ENGINEERING PARTS LIST, COPIES OF WHICH MAY BE OBTAINED FROM:

U. S. ARMY TANK-AUTOMOTIVE CENTER
ATTN: STANDARDIZATION BRANCH
WARREN, MICHIGAN 48090.

Ⓐ CANCELLED AFTER 5 JUNE 85
NO SUPERSEDING STANDARD.

APPROVED 2 NOV 65 REVISED Ⓐ 5 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

| | | |
|---|---|---|
| P.A. MO (ATAC)<br>Other Cust<br>NAVY-MC<br>AF-84 | TITLE<br>CHASSIS, TRUCK, MILITARY DESIGN, M44, 2-1/2 TON, 6X6, 154 INCH WHEELBASE | MILITARY STANDARD<br>MS 500 017 |
| PROCUREMENT SPECIFICATION<br>MIL-T-45362 | SUPERSEDES: | SHEET 2 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 (Cancelled) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE