
This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

Form Approved
OMB No. 0704-0188

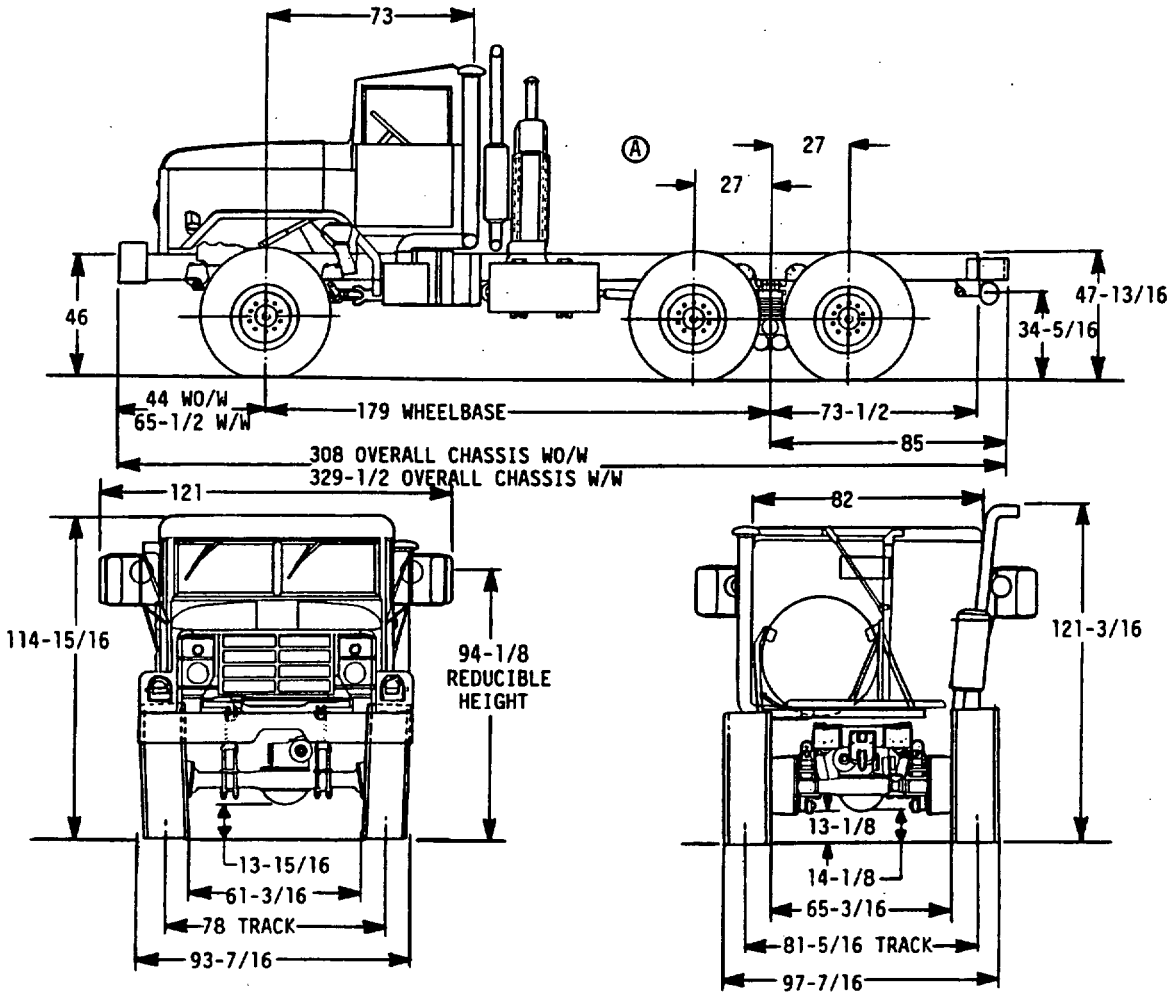

Ⓐ DENOTES CHANGES

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52237-1	8750142	WITH WINCH
MS52237-2	8750143	LESS WINCH

PREPARING ACTIVITY: ARMY-AT
CUSTODIANS: ARMY- NAVY-
AIR FORCE- DLA-
REVIEW:
USER:
PROJECT NUMBER: 2320-A380

MILITARY SPECIFICATION SHEET
TITLE:

CHASSIS, TRUCK, 5-TON, 6x6, M939A1

SPECIFICATION SHEET NUMBER:
MS52237A(AT)
14 SEPTEMBER 1989
SUPERSEDING:
MS52237(AT), 4 OCTOBER 1985
AMSC-NA FSC- 2320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

Form Approved
OMB No. 0704-0188

VEHICLE CHARACTERISTICS

	WO/W	W/W
CURB WEIGHT, FULLY EQUIPPED LESS PAYLOAD AND CREW		
FRONT	10,140 LBS	11,190 LBS
REAR BOGIE	9,280 LBS	9,330 LBS
TOTAL	19,420 LBS	20,520 LBS
PAYLOAD: (MAXIMUM INCLUDING BODY)	12,500 LBS	12,500 LBS
TOWED LOAD ALLOWANCE:	15,000 LBS	15,000 LBS
SHIPPING DIMENSIONS:		
CUBIC FEET	1,636	1,748
SQUARE FEET	209	223
ANGLE OF APPROACH: (LOADED)	46°	31°
ANGLE OF DEPARTURE: (LOADED)	38°	38°
ANGLE OF BREAKOVER: (LOADED)	38°	38°

MINIMUM TURNING RADIUS: (WALL TO WALL) 40-11/16 FT 42-13/16 FT

TRACK: FRONT 78 IN REAR 81-5/16 IN

FORDING DEPTH: WITH KIT 80 IN LESS KIT 32 IN

ENGINE:
MODEL NHC-250 6 CYL. IN-LINE 11669328-1
COMPRESSION IGNITION FUEL INJECTION
DISPLACEMENT 855 CU IN BORE AND STROKE 5.5 X 6
COMPRESSION RATIO 15.8:1
FUEL DIESEL OCTANE/CETANE #40
HORSEPOWER: GROSS 240 @ 2100 RPM
NET 210 @ 2100 RPM
TORQUE: GROSS 658 LB-FT @ 1500 RPM
NET 600 LB-FT @ 1500 RPM
CRANKCASE CAPACITY W/O FILTER 24.0 QTS
W FILTER 28.0 QTS
GOVERNOR TYPE: MECHANICAL
COOLING SYSTEM CAPACITY: 40.0 QTS
PUMP TYPE DRIVE 2 V-BELTS
GOVERNED SPEED: 2100 RPM AT FULL LOAD

FUEL SYSTEM: FUEL TANK CAPACITY 81 GALS
FUEL PUMP, IN-TANK, FUEL INJECTION,
INJECTION PUMP 3028791-3892

CLUTCH: NONE

TRANSMISSION: AUTOMATIC 11669085
NO OF SPEEDS 5 FORWARD, 1 REVERSE
RATIOS: 1ST 4.17:1; 2ND 2.21:1, 3RD 1.66:1
4TH 1.27:1; 5TH 1.0:1; REV 10.76:1 PTO
1 OPENING, SAE 6 BOLT RIGHT SIDE OF TRANS
LUBRICANT CAPACITY W & W/O PTO 17.0 QTS

TRANSFER CASE: W/O PTO 11669112
NO OF SPEEDS 2 RATIOS HIGH 0.732:1
LOW 1.790:1
CONTROL OF FRONT AXLE DRIVE AIR-ACTUATED
MANUAL ENGAGEMENT
(A) LUBRICANT CAPACITY 6.75 QTS

WINCH: 7412382-1
CAPACITY 9,500 LBS
WIRE ROPE CABLE 0.625 IN DIA,
CABLE LENGTH 200 FT

TIEDOWNS: TOTAL QTY 15 (11 U-BOLTS), 10883223
SIX LEFT SIDE, FIVE RIGHT SIDE
TWO FRONT LIFTING SHACKLES 12301040
TWO REAR LIFTING SHACKLES 7409523

AXLES: FRONT 12256540
REAR QTY 2 12256156
TYPE: SINGLE-SPEED, DOUBLE REDUCTION
RATIO 6.443:1
LUBRICANT CAPACITY 12.0 QTS EACH

FRAME: 12256206
TYPE: RAIL CHANNEL, SIDERAIL DIMENSIONS
(A) 9 X 3 X 0.31; SECTION MODULUS 10.7 CU. IN
NO OF CROSSMEMBERS 6

FRONT SPRINGS: 3 WIDE X 50 LONG 7411110
NO OF LEAVES 12; RATE 2,271 LB/IN
TYPE SEMI ELLIPTICAL
SHOCK ABSORBERS DIRECT ACTING QTY 2

REAR SPRINGS: 4 WIDE X 59.25 LONG 7409613
NO OF LEAVES 13; RATE 5,983 LB/IN
TYPE SEMI ELLIPTICAL, INVERTED QTY 2

STEERING: HYDRAULIC W/POWER ASST 11668993
RATIO 20.4:1

TIRES: TUBELESS W/BEADLOCKS SIZE 14.00R20
LOAD RATING J; ALL TERRAIN TREAD; 1 SPARE

WHEELS: TWO PIECE STEEL DISC 12301115
20 DIA X 10.00 WIDE: OFFSET 5.09

BRAKES, SERVICE: AIR ACTUATED, SELF ADJUST
FRONT SINGLE ACTUATING; REAR DUAL ACTING
DRUM SIZE FRONT & REAR 15 DIA X 7 WIDE
TOTAL EFFECTIVE AREA FRONT 432 SQ IN
REAR 864 SQ IN

BRAKES, PARKING: COMBINATION INTERNAL EXPANDING 12 DIA X 3 WIDE. DRUM AT REAR OF TRANSFER CASE AND FOUR SPRING EMERGENCY PARKING TYPE ON REAR AXLES.

ELECTRICAL SYSTEM: WATERPROOFED, RADIO SUPPRESSED PER MIL-STD-461
POTENTIAL 24 VOLTS; MOTOR MS53011-1
ALTERNATOR 60 AMP RATING 10929868
DRIVE 2 V-BELTS
BATTERIES QTY 4; TYPE 12V - 6TN MS35000-3

TRAILER COUPLING SOCKET 8376209
TURN SIGNAL, SOLID STATE FLASHER 11613631
CONTROL 11669166
LIGHTING: HEADLAMPS 8741462
B.O. DRIVING LAMP 8747988
COMPOSITE LAMPS: FRONT 11614156
REAR 11614157

PERFORMANCE: APPROX. 4.6 MILES PER GALLON
350 MILES CRUISING RANGE GRADEABILITY
WITH GVW OF 33,620 LBS, HIGH 1.7% LOW 60%
MAXIMUM SPEED 63 MPH AT ENGINE GOVERNED
SPEED 2100 RPM

CAB: TYPE: STD CANVAS, ARCTIC HARDTOP KIT,
CAPACITY 3

PINTLE: 8710630
MAX VERTICAL LOAD (STATIC) 1,500 LBS

ON-VEHICLE EQUIPMENT: (OVE)
BASIC ISSUE ITEMS 12300877
ADDITIONAL AUTHORIZATION LIST ITEMS 12300998

ACCESSORY/SUPPLEMENTAL KITS: 12302863

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52237-1	8750142	WITH WINCH
MS52237-2	8750143	LESS WINCH

PREPARING ACTIVITY: ARMY-AT

CUSTODIANS: ARMY- NAVY-
AIR FORCE- DLA-

REVIEW:
USER:

PROJECT NUMBER: 2320-A380

MILITARY SPECIFICATION SHEET

TITLE:
CHASSIS, TRUCK, 5-TON, 6x6, M939A1

SPECIFICATION SHEET NUMBER:
MS52237A(AT)
14 SEPTEMBER 1989

SUPERSEDING:
MS52237(AT), 4 OCTOBER 1985

AMSC-NA FSC- 2320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.