INCH-POUND

MS-90572A
NOTICE 1
1 March 1991

NOTICE
OF CANCELLATION

MILITARY SPECIFICATION SHEET

ADAPTER, CONNECTOR TYPE UG-1531/U, 7/8 COUPLING FLANGE - QL MALE CONNECTOR

MS-90572A dated 25 July 1968, is hereby canceled without replacement.


Preparing Activity
Army - CR
(Project 5935-3835-09)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:39Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

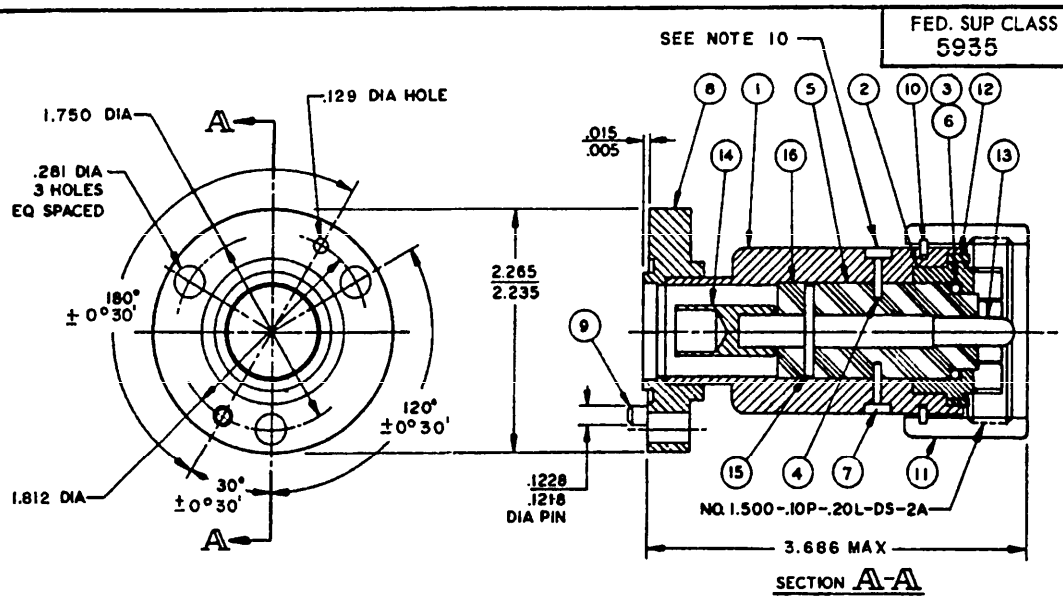

Item No.	Drawing number	Description	Qty
2	ES-B-178374	Insert	1
12	ES-B-178376-2	Gasket	1
4	ES-C-193221-1	Dowel .125 x .300 lg	2
7	ES-C-193221-1	Potting compound (epoxy)	As req'd
8	ES-C-193223	Flange	1
9	ES-B-193224	Pin	1
5	ES-B-193225	Conductor assy	1
15	ES-B-193225-1	Rod	1
13	ES-B-193226	Contact	1
14	ES-B-193227	Conductor	1
16	ES-B-193228	Insulator	1
1	ES-C-193318	Body assy	1
(A) 6	SM-B-424110	Lubricant 'O' Ring	As req'd
(A) 3	SM-B-424112-2	'O' Ring	1
(A) 10	SM-B-424114	Washer spring tension	1
(A) 11	SM-C-424122	Nut coupling	1

MS PART NO.	MS90572-1531

INCHES	MM
.005	.13
.015	.38
.10	2.54
.1218	3.09
.1228	3.12
.125	3.18
.129	3.28
.20	5.09
.281	7.14
.300	7.62
1.500	38.10
1.750	44.45
1.812	46.02
2.235	56.77
2.265	57.53
3.686	93.62

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Packaging and packing of assembled items shall conform to MIL-A-27434.
(A) 5. Apply minute amount of lubricant to SM-B-424112-2 on assembly.
6. Rigid line flange to be in accordance with MIL-F-24044/1-02.
7. The part number consists of the MS Military Standard number followed by dash number. The dash '1531' is derived from assigned nomenclature.
8. For design feature purposes this standard takes precedence over procurement documents referenced herein.
9. Referenced documents shall be of the issue in effect on date of invitation for bids.
10. Use 50/50 mix; 2741 and 2715 as supplied by Emerson and Cumming Inc., Canton, Mass. or equal.

ENGINEERING DATA: Radio frequency, coaxial, connector adapter; nominal impedance, 50 ohms; rated at 1000 volts RMS; practical frequency limit 5 G Hz.

APPROVED 21 November 1967 REVISED (A) 25 July 1968

MC(@), CG(@) Navy EC+, AS(@), OS(@), EL + Army MI +, AF 11+, 85+, 17+, 19(@), 14(@)

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EL	International interest	TITLE ADAPTER, CONNECTOR (A) TYPE UG-1531/U, 7/8 COUPLING FLANGE — QL MALE CONNECTOR	MILITARY STANDARD
Other Cust EC 11			MS90572
Procurement Specification MIL-A-27434		SUPERSEDES: ES-DL-193220	SHEET 1 OF 1

DD FORM 1 APR 66 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 5935-1641-1

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:39Z
Check the source to verify that this is the current version before use.