
MS9823

FED SUP CLASS
5306

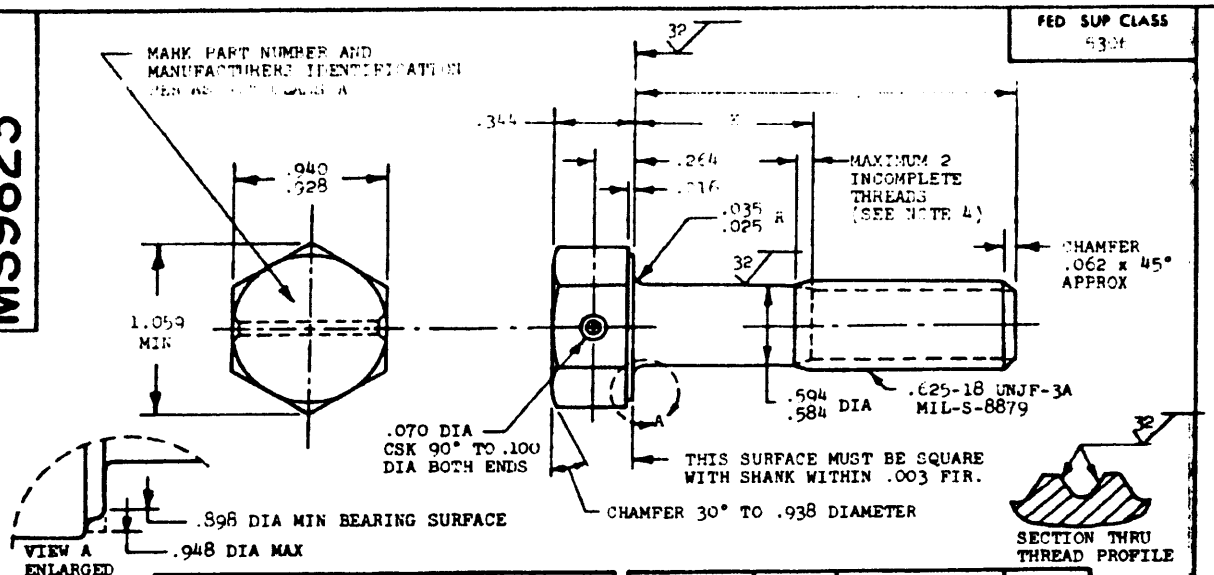

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9823-03	.938	.118- .138	14.37
MS9823-04	1.000	.118- .138	14.85
MS9823-05	1.062	.118- .138	15.33
MS9823-06	1.125	.118- .138	15.81
MS9823-07	1.188	.118- .138	16.29
MS9823-08	1.250	.118- .138	16.76
MS9823-09	1.312	.118- .138	17.24
MS9823-10	1.375	.118- .138	17.72
MS9823-11	1.438	.118- .138	18.19
MS9823-12	1.500	.118- .138	18.67
MS9823-13	1.562	.118- .138	19.14
MS9823-14	1.625	.118- .138	19.62
MS9823-15	1.688	.128- .188	20.10
MS9823-16	1.750	.190- .250	20.58
MS9823-17	1.812	.252- .312	21.06
MS9823-18	1.875	.315- .375	21.52
MS9823-19	1.938	.378- .438	22.00
MS9823-20	2.000	.440- .500	22.48
MS9823-21	2.125	.565- .625	23.44
MS9823-22	2.250	.690- .750	24.39
MS9823-23	2.375	.815- .875	25.34
MS9823-24	2.500	.940-1.000	26.29
MS9823-25	2.625	1.065-1.125	27.25
MS9823-26	2.750	1.190-1.250	28.20
MS9823-27	2.875	1.315-1.375	29.15
MS9823-28	3.000	1.440-1.500	30.11
MS9823-29	3.125	1.565-1.625	31.06
MS9823-30	3.250	1.690-1.750	32.01

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9823-31	3.375	1.815-1.875	32.97
MS9823-32	3.500	1.940-2.000	33.92
MS9823-33	3.625	2.065-2.125	34.87
MS9823-34	3.750	2.190-2.250	35.83
MS9823-35	3.875	2.315-2.375	36.78
MS9823-36	4.000	2.440-2.500	37.73
MS9823-37	4.125	2.565-2.625	38.69
MS9823-38	4.250	2.690-2.750	39.64
MS9823-39	4.375	2.815-2.875	40.60
MS9823-40	4.500	2.940-3.000	41.54
MS9823-41	4.625	3.065-3.125	42.50
MS9823-42	4.750	3.190-3.250	43.43
MS9823-43	4.875	3.315-3.375	44.40
MS9823-44	5.000	3.440-3.500	45.36
MS9823-45	5.125	3.565-3.625	46.31
MS9823-46	5.250	3.690-3.750	47.26
MS9823-47	5.375	3.815-3.875	48.22
MS9823-48	5.500	3.940-4.000	49.17
MS9823-49	5.625	4.065-4.125	50.13
MS9823-50	5.750	4.190-4.250	51.08
MS9823-51	5.875	4.315-4.375	52.03
MS9823-52	6.000	4.440-4.500	52.99

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .028 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5643.
6. HARDNESS: ROCKWELL C32-38.
7. MANUFACTURING SPECIFICATION: AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

(B) REINSTATED 31 OCT 84

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 11 MAR 70 REVISED (A) 21 DEC 83 (B) 31 OCT 84

Review activities:
AIR FORCE-82
DLA-IS

(B)

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications is for repetitive use shall be made from this document when applicable.

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AS Other Cust (B) AV 99	(B)	BOLT, MACHINE - HEXAGON HEAD, FILLET, 1 [illegible], PD SHANK, AMS 5643, .625-18 UNJF-3A	MS9823
PROCUREMENT SPECIFICATION NONE	SUPERSEDES.		PAGE 1 OF 1

5306-0890

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U S GOVERNMENT PRINTING OFFICE 1985 — 505-038/20588

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.