
USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
AMSC N/A
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE, DISTRIBUTION IS UNLIMITED. This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

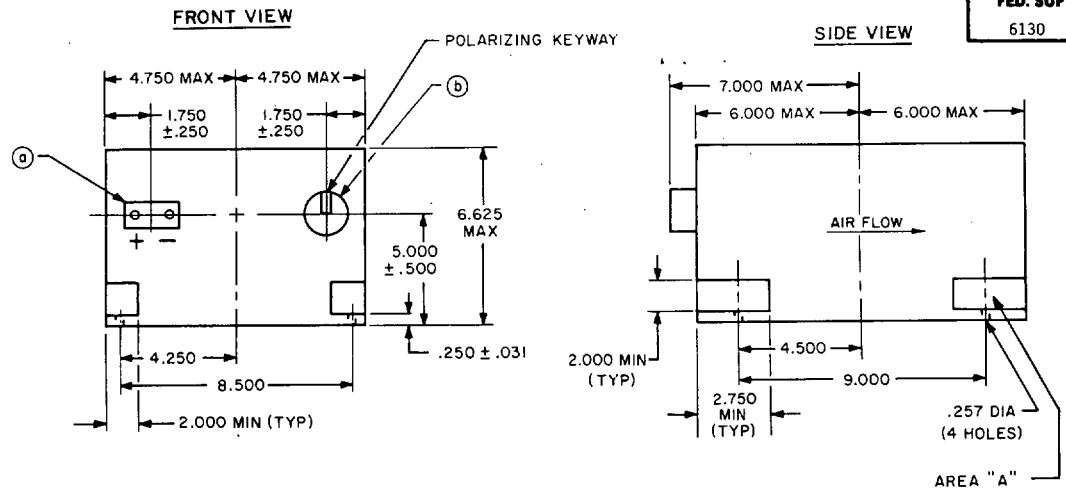


a TERMINAL BOARD MS25044-1 PLACARDED SHOWING DC POSITIVE AND DC NEGATIVE

b RECEPTACLE TO FIT PLUG MS3106R-18-22S OR MS3459W-18-22S

AREA "A" IS CLEARANCE AREA TO PROVIDE FOR ALTERNATE METHOD OF MOUNTING REAR END INTO FRICTION CLIPS

AC INPUT:	
VOLTAGE RANGE	112.5-117.5 VOLTS
FREQUENCY RANGE	380-420 HERTZ
DC OUTPUT:	
VOLTAGE	SEE FIGURE 2
MAXIMUM LOAD CURRENT	100 AMPERES
MINIMUM LOAD CURRENT	1.0 AMPERES
WEIGHT (LBS)	12.5 (MAX)

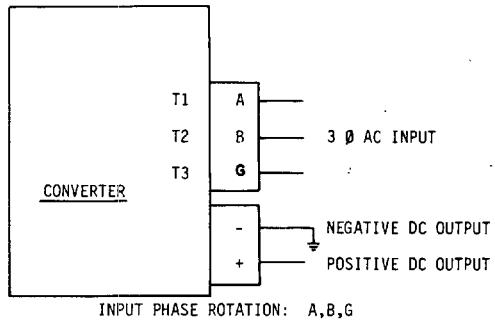

INPUT PHASE ROTATION: A,B,G

MS PART NO.
MS17335-1

FIGURE 1. CONNECTION DIAGRAM.


APPROVED 22 AUG 61 — REVISED (C) 9 APRIL 1968 (D) 2 MARCH 1970 (E) 1 SEPT 1977 (F) 20 JUNE 1980 (G) 30 SEPT 1988

(G) ENTIRE STANDARD REVISED

P.A. NAVY — AS Other Cust	TITLE: CONVERTER, 100 AMPERE, CLASS B NONREGULATED, AIRCRAFT, FAN COOLED	MILITARY STANDARD MS17335(AS)
PROCUREMENT SPECIFICATION: MIL-C-7115	SUPERSEDES: MS25180(AER)	SHEET 1 OF 3

PROJECT NO. 6130-N287

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

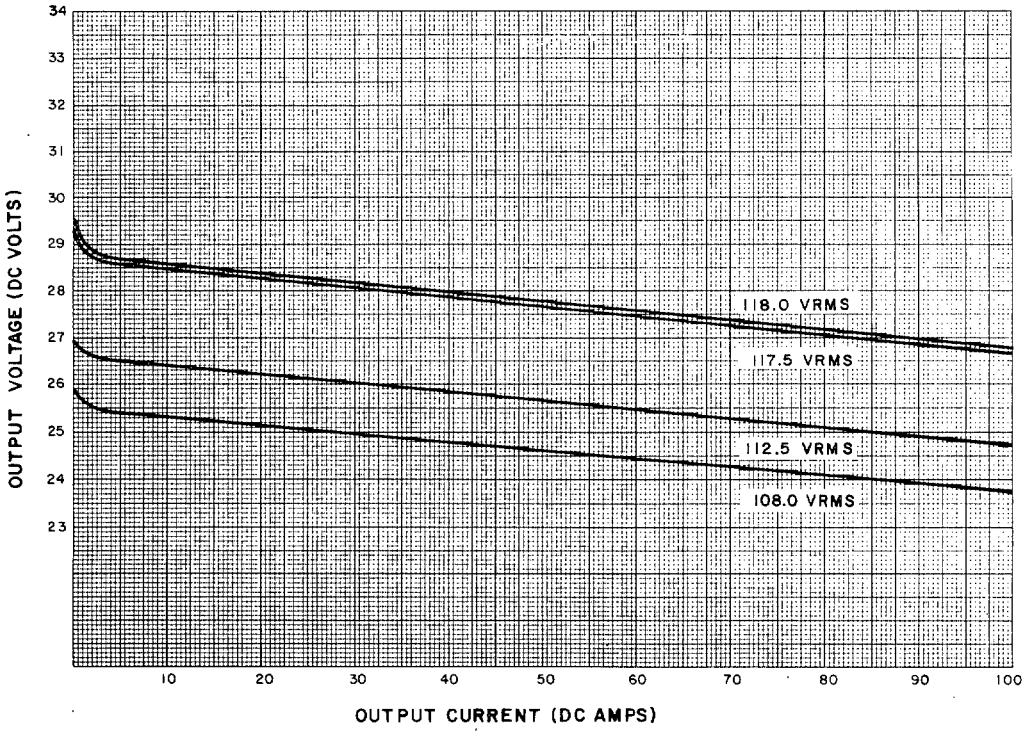

INPUT		108.0 VRMS	112.5 VRMS	117.5 VRMS	118.0 VRMS
OUTPUT	AMPS DC	MIN. VDC	MIN. VDC	MAX. VDC	MAX. VDC
	*0.0	26.1	27.2	29.4	29.5
	1.0	25.6	26.7	28.9	29.0
	5.0	25.4	26.5	28.6	28.7
	10.0	25.3	26.4	28.4	28.5
	25.0	25.0	26.1	28.0	28.1
	50.0	24.6	25.6	27.5	27.6
	75.0	24.2	25.2	27.1	27.2
	100.0	23.7	24.7	26.6	26.7

FIGURE 2. OUTPUT VOLTAGE LIMITS.

* ZERO LOAD READINGS FOR INFORMATION ONLY.

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
AMSC N/A
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED. This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 22 AUG 61 REVISED (G) FOR CHANGES SEE SHEETS 1, 2 AND 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6130

REQUIREMENTS:

THE CONVERTER SHALL MEET THE REQUIREMENTS OF MIL-C-7115 AS MODIFIED BELOW: (PARAGRAPH NUMBERS REFER TO MIL-C-7115)

3.4.1.3.3 COLOR. DELETE " COLOR NUMBER 17875 (WHITE)" OF FIRST SENTENCE AND ADD "COLOR NUMBER 37038 (BLACK)."

3.7.1.2.3 OUTPUT STARTING VOLTAGE. ADD TO SECOND SENTENCE: "EXCEPT FOR THE FIRST 5 MILLISECONDS FROM THE ONSET OF THE TRANSIENT, WHEN A MAXIMUM VOLTAGE OF 45 VOLTS SHALL BE ALLOWED."

3.7.1.4.2 TYPE II, NONREGULATED CONVERTERS. ADD: EXCEPT THE CONDUCTED EMISSIONS REQUIREMENTS OF CE-03, MIL-STD-461 SHALL BE RELAXED 15 AND 25 db, RESPECTIVELY FOR THE POSITIVE AND NEGATIVE LEADS FROM 150 KHz TO 1.0 MHz."

3.7.1.5 ACOUSTICAL NOISE. NOT APPLICABLE.

3.7.2.2 ACCELERATION. NOT APPLICABLE.

3.7.2.5 VIBRATION. DELETE AND SUBSTITUTE: "THE CONVERTER SHALL MEET THE FOLLOWING VIBRATION REQUIREMENTS IN EACH OF THE 3 MAJOR AXES AT ROOM AMBIENT TEMPERATURE ONLY:

DURABILITY: SINUSOIDAL VIBRATION SHALL BE APPLIED TO THE UNIT FOR TWO HOURS IN EACH AXIS WITH A MAXIMUM TOTAL AMPLITUDE OF 0.03 INCHES OVER THE CYCLIC FREQUENCY RANGE OF 10 TO 55 TO 10 Hz WITH A CYCLE DURATION OF 1 TO 5 MINUTES.

PERFORMANCE: ONE 15 MINUTE SINUSOIDAL VIBRATION SCAN SHALL BE APPLIED TO THE CONVERTER FROM 20 TO 500 TO 20 Hz WITH A MAXIMUM TOTAL AMPLITUDE OF 0.03 INCHES FROM 20 TO 60 Hz AND AN ACCELERATION OF 10G FROM 60 TO 500 Hz.

3.7.2.9 EXPLOSIVE ATMOSPHERE. NOT APPLICABLE.

4.7.2.2.3 VOLTAGE REGULATION AT MINIMUM TEMPERATURE-ALTITUDE CONDITIONS. DELETE "-30°C" AND REPLACE WITH "-55°C."

4.7.2.15 ACOUSTICAL NOISE. NOT APPLICABLE.

4.7.2.18 ACCELERATION. NOT APPLICABLE.

4.7.2.21 VIBRATION. DELETE THE FIRST SENTENCE AND ADD: "THE CONVERTER SHALL BE TESTED AS DEFINED HEREIN (SEE 3.7.2.5)."

4.7.2.25 EXPLOSIVE ATMOSPHERE. NOT APPLICABLE.

NOTES:

1. DIMENSIONS ARE IN INCHES. TOLERANCE IS ±.015 UNLESS OTHERWISE SPECIFIED.
2. THE COMPLETE REQUIREMENTS FOR PROCURING THE CONVERTER DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-C-7115.

APPROVED 22 AUG 61 REVISED (G) FOR CHANGES SEE SHEETS 1, 2 AND 3

P.A. NAVY — AS Other Cust	TITLE: CONVERTER, 100 AMPERE, CLASS B NONREGULATED, AIRCRAFT, FAN COOLED	MILITARY STANDARD MS17335(AS)
PROCUREMENT SPECIFICATION: MIL-C-7115	SUPERSEDES: MS25180(AER)	SHEET 3 OF 3

DD FORM 1 MAR 72 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 22065

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

AMSC N/A

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED. This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.