INCH-POUND

MS27653B
W/AMENDMENT 2
27 June 2025
SUPERSEDING
MS27653B
W/AMENDMENT 1
8 February 2008

DETAIL SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, STRAIGHT, CRIMP TYPE, BAYONET COUPLING, SERIES I

Inactive for new design after 13 August 1974.
For new design use MS27467.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

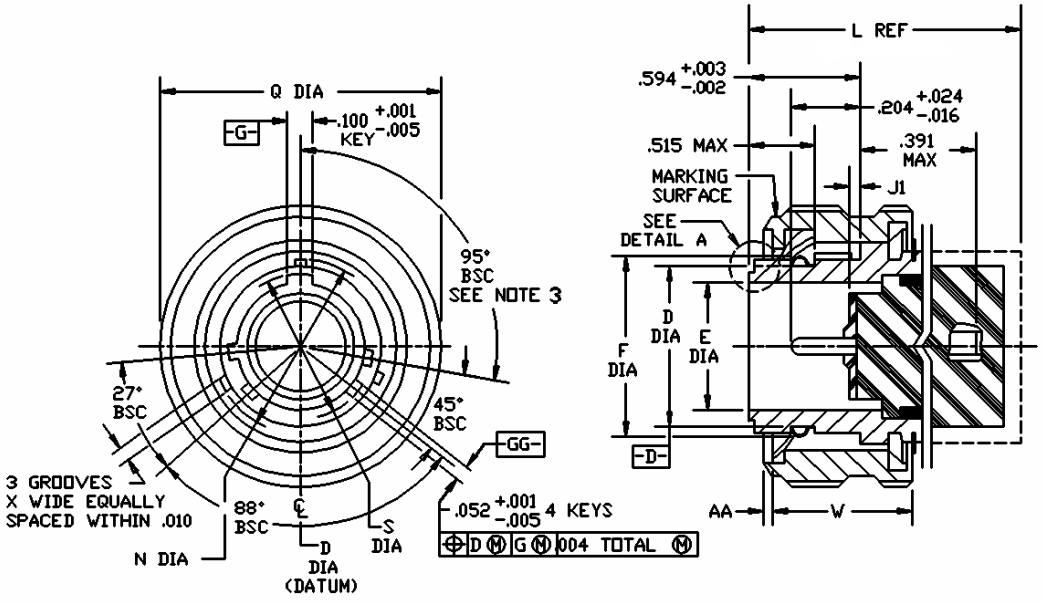


FIGURE 1. Plug, classes E and T.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

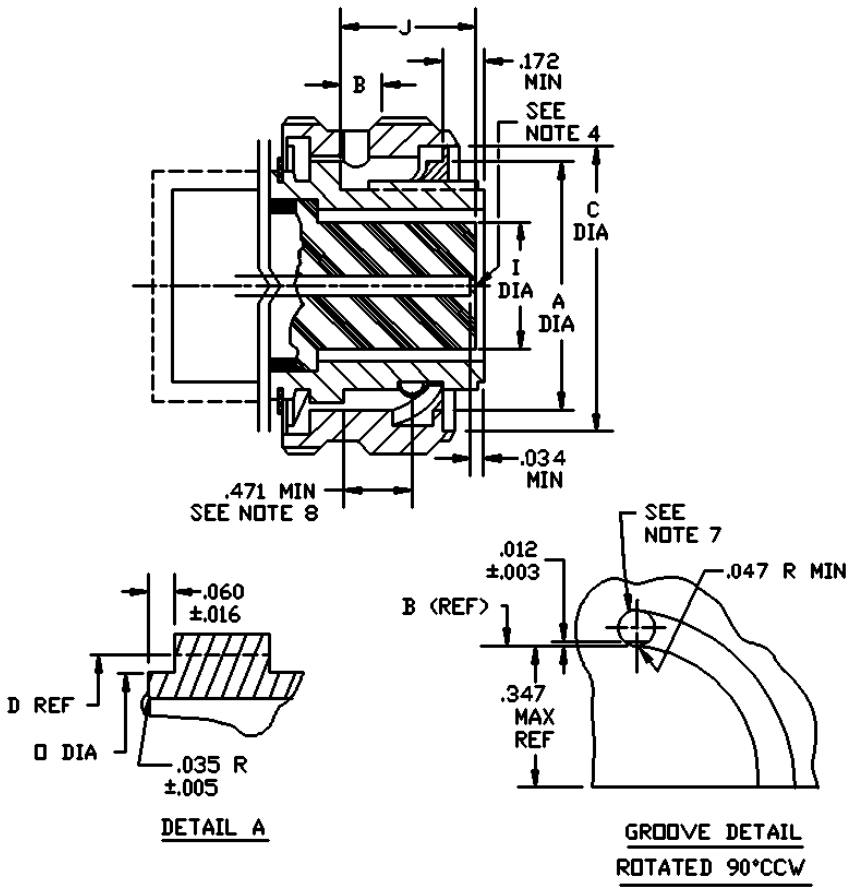


FIGURE 1. Plug, classes E and T – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

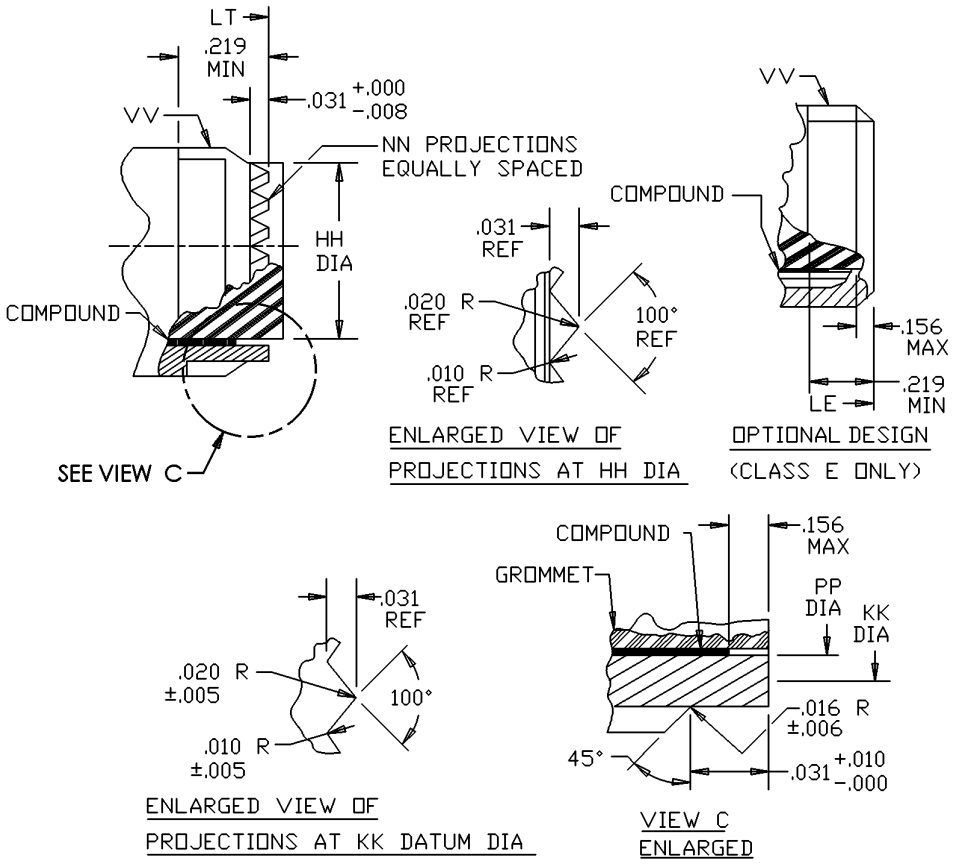


FIGURE 1. Plug, classes E and T – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

Shell size	A dia +.005 -.001	B ±.020	C dia +.005 -.001	D dia +.001 -.005	D[1] dia min	E dia ±.003	F dia min	I dia max	J +.007 -.003 socket insert	J[1] +.012 -.003 pin insert
9	.580	.113	.684	.437	.417	.315	.447	.290	.575	.019
11	.712		.832	.565	.545	.433	.575	.418		
13	.861		.981	.677	.657	.547	.692	.532		
15	.985		1.106	.802	.782	.672	.817	.657		
17	1.110		1.230	.927	.907	.797	.942	.782		
19	1.217		1.347	1.032	1.012	.886	1.047	.871		
21	1.342		1.462	1.157	1.137	1.011	1.172	.996		
23	1.467		1.587	1.282	1.262	1.136	1.297	1.121		
25	1.592	.152	1.712	1.407	1.387	1.260	1.442	1.246		

Shell size	N dia +.005 -.006	Q dia max	S dia +.001 -.010	W +.011 -.006	X +.016 -.001	AA +.005 -.006	For insert arrangement see MIL-STD-1560
9	.674	.859	.482	.693	.090	.068	
11	.822	.984	.610	.682			
13	.972	1.156	.759				
15	1.097	1.281	.884	.693			
17	1.222	1.406	1.009				
19	1.329	1.516	1.114				
21	1.454	1.641	1.239				
23	1.579	1.766	1.364				
25	1.704	1.891	1.489	.794	.137	.047	

FIGURE 1. Plug, classes E and T – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

Shell size	HH dia +.000 -.005	KK DATUM dia	NN	PP dia ± .003	LE max overall length	LT max overall length	VV Thread class 2A (plated)
9	.387	.366	12	.344	1.234	1.234	7/16-28
11	.515	.487	16	.472			9/16-24
13	.628	.609	20	.586			11/16-24
15	.754	.731	24	.711			13/16-20
17	.879	.853	28	.836			15/16-20
19	.985	.974	32	.942			1 1/16-18
21	1.110	1.097	36	1.067			1 3/16-18
23	1.235	1.218	40	1.192			1 5/16-18
25	1.360	1.340	44	1.317			1 7/16-18

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	.025	.010	.254	.035	.889	.204	5.182
.002	.508	.012	.305	.047	1.194	.219	5.563
.003	.077	.016	.406	.052	1.321	.347	8.814
.004	.102	.020	.508	.060	1.524	.391	9.931
.005	.013	.024	.609	.100	2.540	.471	11.963
.006	.152	.031	.787	.156	3.962	.594	15.088
.008	.203	.034	.864	.172	4.369		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Normal keyway position. For other keyway positions, MIL-DTL-38999.
4. Insert front surface shall be flat within .005 Total Indicator Reading (TIR).
5. Diameters A and N shall be concentric within .008 TIR.
6. Diameters D and I shall be concentric within .015 TIR at Maximum Material Condition (MMC).
7. 3 holes (design optional) equally spaced within .010 shall be provided for visual inspection of lock when mated with receptacle.
8. The point at which the gage pin, having the same basic diameter as the mating contact and a square face, touches socket contact spring.

FIGURE 1. Plug, classes E and T – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MS27466, MS27468, MS27469, MS27470, MS27471, MS27496, MS27505, MS27515, MS27652, MS27654, MS27656 and MS27662.
Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:



Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MS27466
MS27467
MS27468
MS27469
MS27470
MS27471
MS27496
MS27505
MS27515
MS27652
MS27654
MS27656
MS27662
MIL-STD-1560

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2025-055)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at **https://assist.dla.mil**.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.