INCH-POUND

MS3479C
w/AMENDMENT 1
27 September 2022
SUPERSEDING
MS3479C
1 March 2007


DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, SERIES II, HERMETIC, SOLDERLESS, REAR MOUNTING, JAM NUT, BAYONET COUPLING, CLASS N

Reactivated after 1 March 2007 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

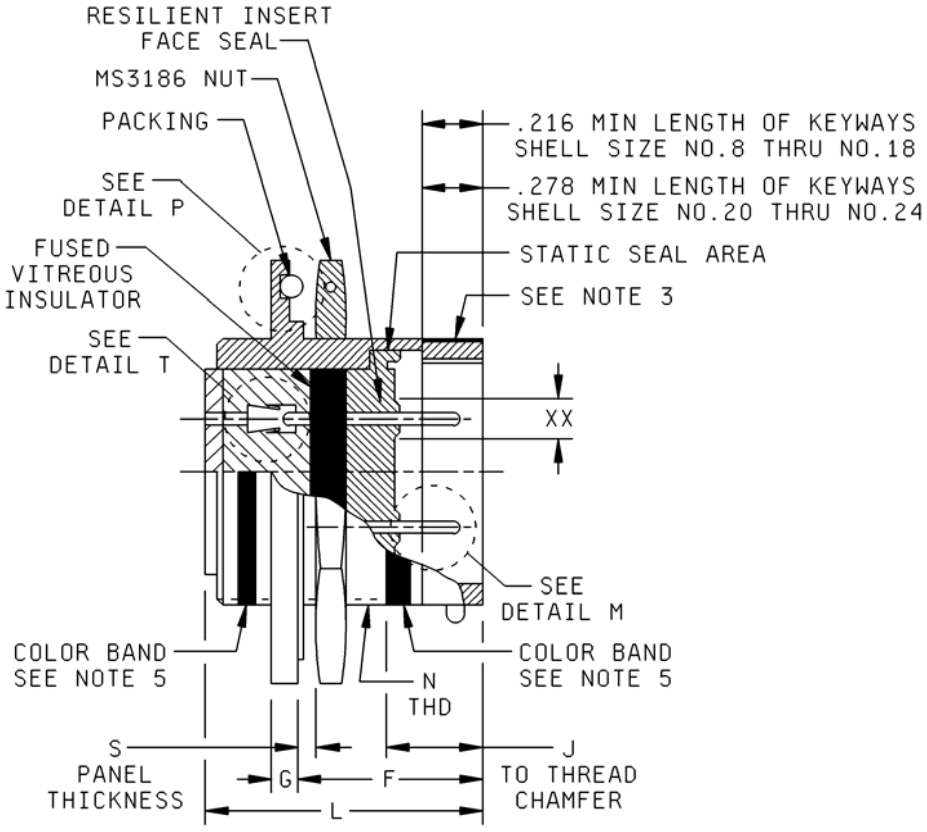

NOTE: For “XX”, see note 4 and table I for contact cavities requiring reduced dimensions.
FIGURE 1. Receptacle, class N, dimensions and configurations.

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

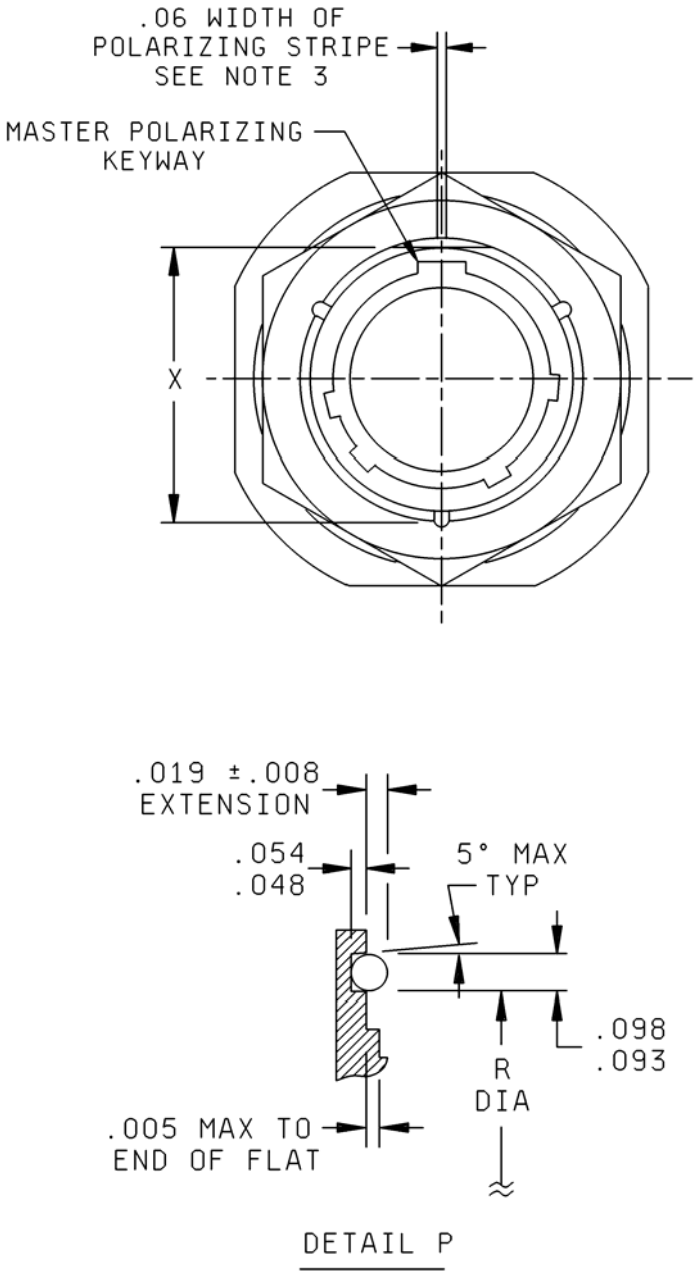


FIGURE 1. Receptacle, class N, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

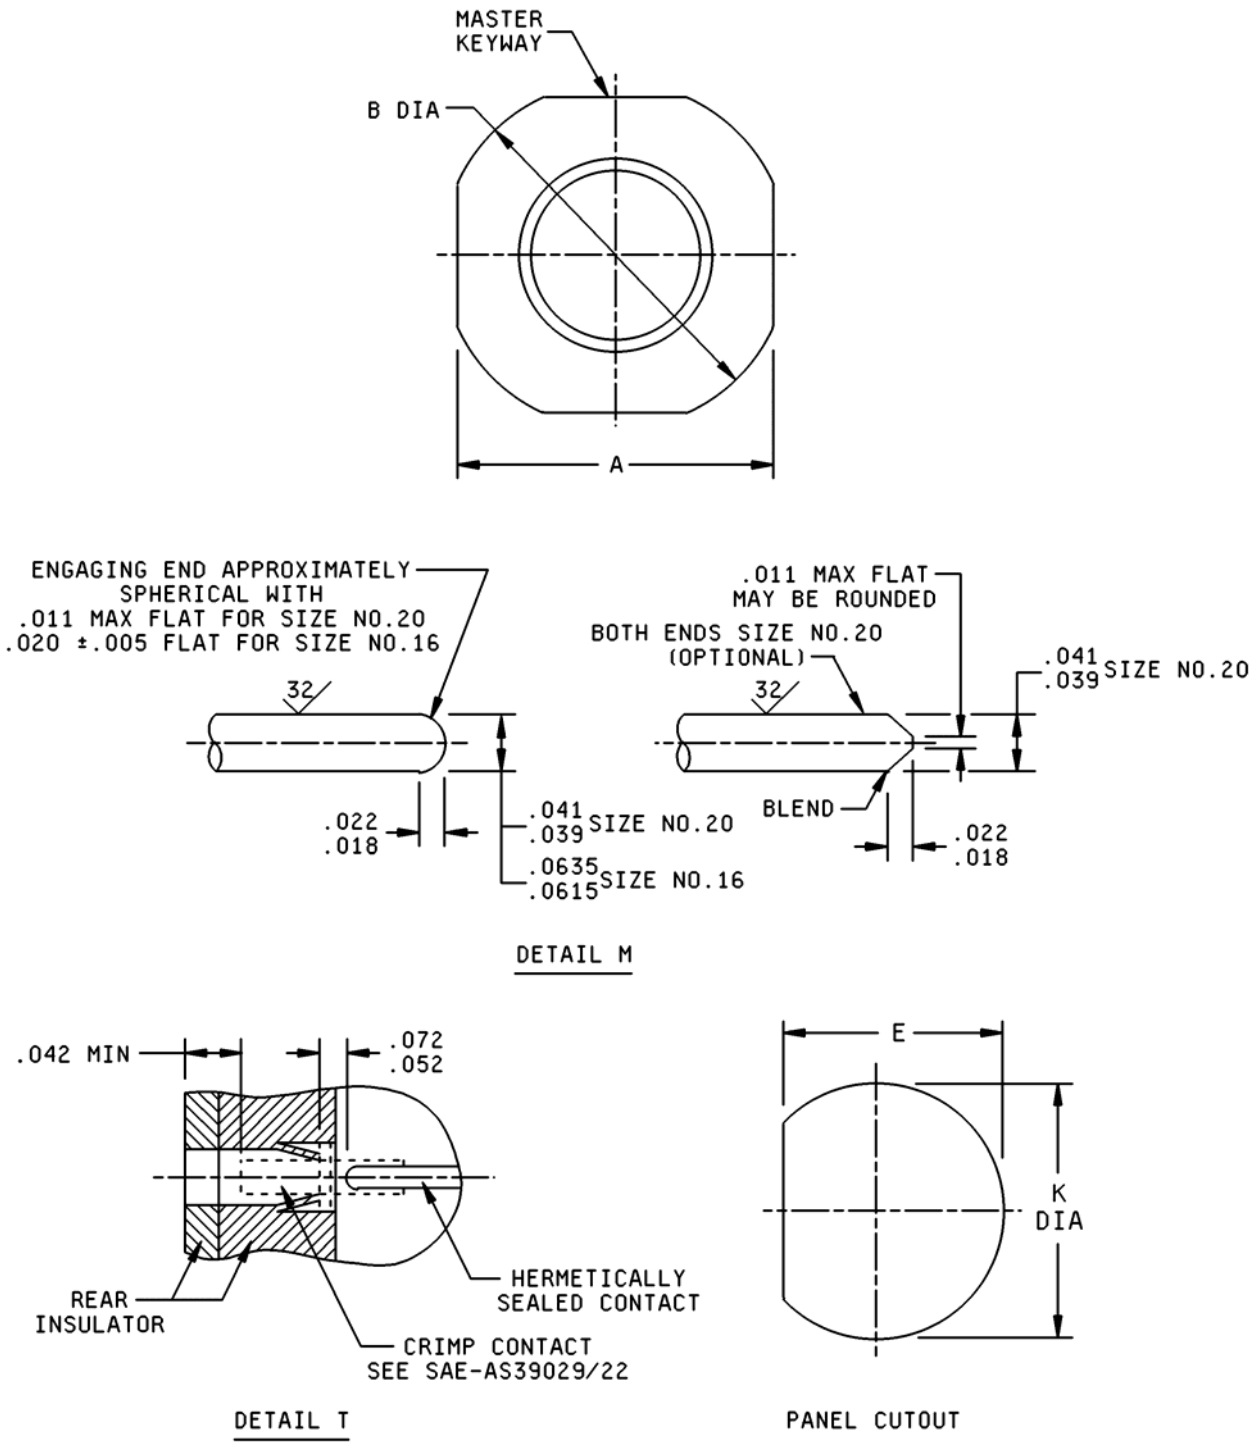


FIGURE 1. Receptacle, class N, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

Shell size	A	B	E	F	G	J	K
8	.954 (24.23) .924 (23.47)	1.078 (27.38) 1.047 (26.59)	.536 (13.61)	.887 (22.53)	.113 (2.87)	.378 (9.60)	.572 (14.53)
10	1.078 (27.38) 1.047 (26.59)	1.203 (30.56) 1.172 (29.77)	.661 (16.79)				.697 (17.70)
12	1.266 (32.16) 1.235 (31.37)	1.391 (35.33) 1.360 (34.54)	.824 (20.93)				.895 (22.73)
14	1.391 (35.33) 1.360 (34.54)	1.516 (38.51) 1.485 (37.72)	.948 (24.08)	.867 (22.02)	.097 (2.46)		1.010 (25.65)
16	1.516 (38.51) 1.485 (37.72)	1.641 (41.68) 1.610 (40.89)	1.072 (27.23)			.358 (9.09)	1.135 (28.83)
18	1.641 (41.68) 1.610 (40.89)	1.766 (44.86) 1.735 (44.07)	1.197 (30.40)				1.260 (32.00)
20	1.828 (46.43) 1.797 (45.64)	1.954 (49.63) 1.923 (48.84)	1.322 (33.58)	.916 (23.27)	.148 (3.76)		1.385 (35.18)
22	1.954 (49.63) 1.923 (48.84)	2.078 (52.78) 2.047 (51.99)	1.447 (36.75)				1.510 (38.35)
24	2.078 (52.78) 2.047 (51.99)	2.203 (55.96) 2.172 (55.17)	1.572 (39.93)	.896 (22.76)	.128 (3.25)	.405 (10.29) .385 (9.78)	1.635 (41.53)

FIGURE 1. Receptacle, class N, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

Shell size	N UNEF-2A	L	R	S	X
8	.5625-24	1.078 (27.38)	.609 (15.47)	.187 (4.75) .062 (1.57)	.525 (13.34)
10	.6875-24		.734 (18.64)		.650 (16.51)
12	.875-20		.921 (23.39)		.813 (20.65)
14	1.000-20		1.046 (26.57)		.937 (23.80)
16	1.125-18		1.171 (29.74)		1.061 (26.95)
18	1.250-18		1.296 (32.92)		1.186 (30.12)
20	1.375-18	1.140 (28.96)	1.484 (37.69) (.058 (1.47))	.250 (6.35) .062 (1.57)	1.311 (33.30)
22	1.500-18		1.609 (40.87)		1.436 (36.47)
24	1.625-18		1.734 (44.04)		1.561 (39.65)

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. Unless otherwise specified, tolerances shall be .XX ± .01, .XXX ± .005. Angular tolerances shall be ± 1°.
3. Polarizing stripe, color optional.
4. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated (see figure 1).
5. Color band: .070 (1.78 mm) ± .031 (0.79 mm) wide, color blue. Band location must be such that it is visible when mounting.
6. True position (TP) tolerances specified are in accordance with ASME Y14.5.

FIGURE 1. Receptacle, class N, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

TABLE I. Contact cavities requiring reduced diameters (XX) for pins and sockets in outer row of contact cavities. 1/

Shell size	Insert arrangement	Contact cavities
8	-2, -3, -4, -33 & -98	All
12	-10	C, G.
14	-12	A, B, C, D, E, F, G, H.
14	-18	A, C, E, G, J, L.
14	-19	B, D, F, H, K, M.
16	-26	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R.
18	-32	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T.
22	-41	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y.

1/ The reduced diameter "XX" refers to the diameters of the raised seal barriers (pin barrier rings) or lead-in chamfers (socket entry holes) to ensure proper sealing of pin and socket after mating. See MIL-DTL-26482, connector intermateability control dimensions (series 1 and series 2) figure for reduced diameter "XX" for contact size 20 only.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.
Connector mating: This connector mates with MS3475 and MS3476.
For insert arrangement: See MIL-STD-1669.
Contact SAE-AS39029/22-XX-XX must be used for wire terminations.
Shell material: Cold rolled steel, in accordance with ASTM A108.
Shell finish: .00001 (0.254 µm) minimum tin in accordance with ASTM B545 and ASTM B339, over nickel in accordance with SAE-AMS-QQ-N-290.
Jam nut finish: Nickel in accordance with SAE-AMS-QQ-N-290.
Insertion/removal tool M81969/16-XX to be used with this connector.
Maximum wire diameter permissible: .074 (1.88 mm) for size 20 contact, .103 (2.62 mm) for size 16 contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

MS3479	N	12	D	10	P	Y

MS3479	MS number
N	Class
12	Shell size
D	Termination type and shell material
10	Insert arrangement
P	Contact style
Y	Insert position

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3186
MS3475
MS3476
MIL-STD-1669
ASME Y14.5
ASTM A108
ASTM B339
ASTM B545
SAE-AMS-QQ-N-290
SAE-AS39029/22

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2022-171)

Review activities:
Army - AR, AV, MI
Navy - EC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.