INCH-POUND

MIL-M-28787/265A
AMENDMENT 3
30 September 1992
SUPERSEDING
AMENDMENT 2
23 September 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MEMORY, READ ONLY, DIGITAL

This amendment forms a part of Military Specification MIL-M-28787/265A(EC), dated 2 June 1982, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

*3.5.8: Delete and substitute the following:

"3.5.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part or identifying number M28787/265-1 for class I. No marking shall interfere with heat dissipation from the fin (such as affixing a label which may act as a heat barrier)."

PAGE 4

*TABLE I: Delete and substitute new table I as printed on pages 3 and 4 of this amendment.

PAGE 8

6.5: Delete and substitute the following:

"6.5 Cross reference of classification. Part number M28787/265-1 supersedes part number M28787/265. The two parts are interchangeable.

6.6 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:14Z
Check the source to verify that this is the current version before use.

whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue."

PAGE 17

TABLE III: Delete and substitute new table III as printed on page 5 of this amendment.

PAGE 19

FIGURE 11: Delete and substitute new figure 11 as printed on page 6 of this amendment.

PAGE 43

***TABLE XIII:** Delete and substitute new table XIII as printed on page 7 of this amendment.

PAGE 55

FIGURE 27: Delete and substitute new figure 27 as printed on page 8 of this amendment.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0216)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:14Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

Test cond	Parameter	Ref test table	Test type 1/-3/	Acceptance requirements 25°C ± 5°C ambient temperature				Operating temperature 0°C to 60°C				Unit
				Initial		End-of-life		Initial		End-of-life		
				Min	Max	Min	Max	Min	Max	Min	Max	
A	Isolation	II	S	10	∞	1.0	∞	10	∞	1.0	∞	MΩ
B	Vcc stress	III	Q	----------SEE TABLE III----------								
C1-C18	Input breakdown current	IV	S	0	2	0	2	0	2	0	2	mA
C19-C22	Input breakdown current	IV	S	0	1	0	1	0	1	0	1	mA
D1-D16	Output short circuit current	V	X	-15	-90	-15	-90	-15	-90	-15	-90	mA
E1-E16	Output leakage current, low level	VI	X	-100	100	-100	100	-100	100	-100	100	µA
F1-F16	Output leakage current, high level	VII	X	-100	100	-100	100	-100	100	-100	100	µA
G1-G22	Input clamp diode voltage	VIII	X	-0.4	-1.5	-0.4	-1.5	-0.4	-1.5	-0.4	-1.5	V
H1-H16	Static output voltage, low level	IX	X	0.00	0.45	0.00	0.45	0.00	0.45	0.00	0.45	V
J1-J16	Static output voltage, high level	X	X	2.4	4.5	2.4	4.5	2.4	4.5	2.4	4.5	V

- See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:14Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - Continued.

Test cond	Parameter	Ref test table	Test type 1/-3/	Acceptance requirements 25°C ± 5°C ambient temperature				Operating temperature 0°C to 60°C				Unit
				Initial		End-of-life		Initial		End-of-life		
				Min	Max	Min	Max	Min	Max	Min	Max	
K1-K18	Input current, low level	XI	X	0	-0.56	0	-0.56	0	-0.56	0	-0.56	mA
K19-K22	Input current, low level	XI	X	0	-0.28	0	-0.28	0	-0.28	0	-0.28	mA
L1-L18	Input current, high level	XI	X	-20	80	-20	80	-20	80	-20	80	µA
L19-L22	Input current, high level	XI	X	-20	40	-20	40	-20	40	-20	40	µA
M	Power supply current	XII	X	10	450	10	450	10	450	10	450	mA
N1-N16	Transition time (tTLH), CL = 50 pF	XIII	S	3	30	3	30	3	35	3	35	nS
N17-N32	Transition time (tTLH), CL = 150 pF	XIII	Q	5	40	5	40	5	45	5	45	nS
N33-N48	Transition time (tTHL), CL = 50 pF	XIII	S	3	30	3	30	3	35	3	35	nS

- See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:14Z
Check the source to verify that this is the current version before use.


TABLE II. Isolation test.

Test cond	Parameter	Connect		Initial limits 25°C ± 5°C ambient		Unit	Test fig
		A to pin	B to pin	Min	Max		
A	Isolation	C	Frame	10	∞	MΩ	10

TABLE III. V_{cc} stress test.

Test cond	Parameter	Initial limits 25°C ± 5°C ambient		Unit	Test fig
		Min	Max		
B	Vcc stress	Must pass remainder of tests.			11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:14Z
Check the source to verify that this is the current version before use.

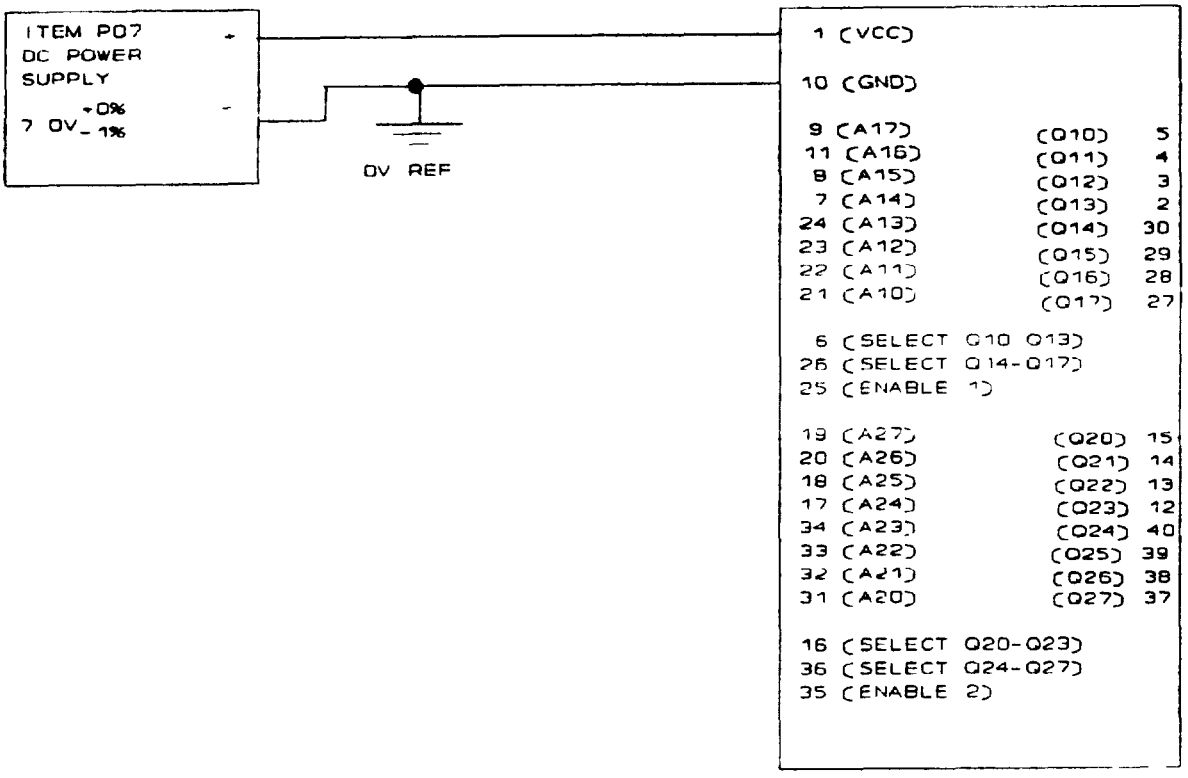

NOTE: Duration of test shall be 5 seconds.


FIGURE 11. V_{CC} stress test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:14Z
Check the source to verify that this is the current version before use.

TABLE XIII. Transition time (t_{TLH}) and (t_{THL}) test.

Test cond	Parameter	Connect		Initial limits 25°±5°C ambient		Unit	Test fig
		A to pin	B to pin	Min	Max		
N1	Q10 Transition time (tTLH), CL = 50 pF	See notes 2 and 3, figure 24	5	3	30	ns	23,24
N2	Q11		4				
N3	Q12		3				
N4	Q13		2				
N5	Q14		30				
N6	Q15		29				
N7	Q16		28				
N8	Q17		27				
N9	Q20		15				
N10	Q21		14				
N11	Q22		13				
N12	Q23		12				
N13	Q24		40				
N14	Q25		39				
N15	Q26		38				
N16	Q27		37				
N17	Q10 Transition time (tTLH), CL = 150 pF		5	5	40		
N18	Q11		4				
N19	Q12		3				
N20	Q13		2				
N21	Q14		30				
N22	Q15		29				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:14Z
Check the source to verify that this is the current version before use.

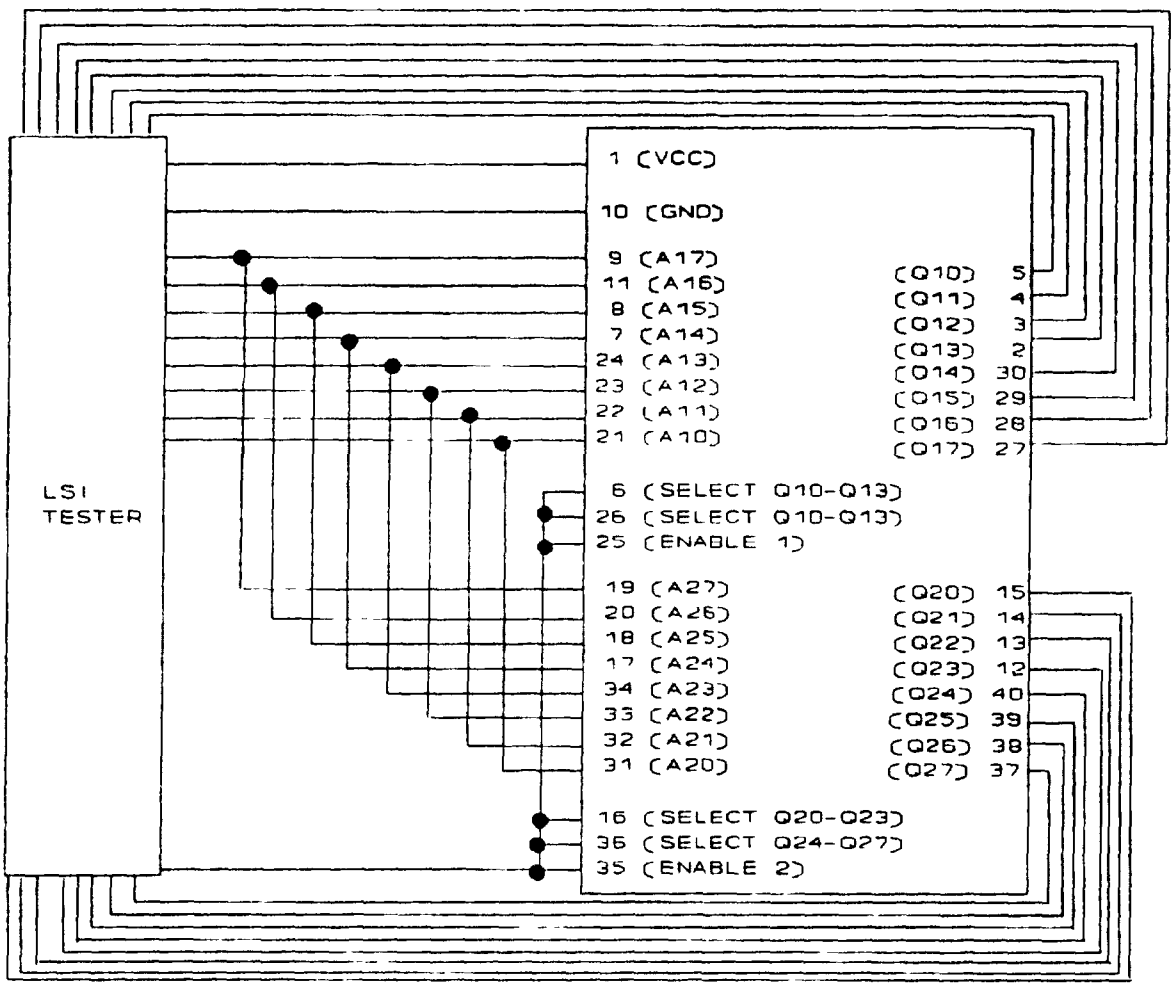

NOTES:

1. V_{cc} = 4.5 V ± 1% for test conditions Q1 and Q3.
2. V_{cc} = 5.5 V ± 1% for test conditions Q2 and Q4.
3. Load output under test with a load as specified on figure 19.

FIGURE 27. Galloping read access pattern test circuit for table XV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:14Z
Check the source to verify that this is the current version before use.