INCH-POUND

MIL-M-28787/268A
AMENDMENT 1
31 March 1993

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MULTIPLIER, DIGITAL, KEY CODE AGA

This amendment forms a part of Military Specification MIL-M-28787/268A(EC), dated 20 October 1983, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 5

TABLE I, Test conditions J1-J14, Test type column: Delete "X" and substitute "S".

TABLE I, Test conditions N3-N10, N15-N42, N43-N58, N59-N68, N69-N96, N97-N120, N127-N150, Test type column: Delete "S,Q" (six places) and substitute "See table XIV" (six places).

PAGE 6

TABLE I, Test conditions P3-P10, P23-P42, P15-P22, P43-P58, P59-P68, P69-P96, P97-P120, P127-P150, Test type column: Delete "S,Q" (seven places) and substitute "See table XV" (seven places).

PAGE 8

4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through T shall be performed in any order with the following exceptions. Test conditions A, B, C, J, and Q are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, J, or Q are part of a sequence of tests, the order of testing shall be as follows: A, B, C, J, and Q where applicable, followed by the remaining tests in the sequence."

4.5.1: Delete and substitute the following:

"4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through T in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions D through H, K through P, R, and T shall be performed in the order specified in 4.4.2 using the initial limits for the applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2."

Distribution Statement A

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:16Z
Check the source to verify that this is the current version before use.

4.5.3: Delete and substitute the following:

"4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests D through H, K through P, R, and T shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements in table I. Following the return of the module to 25 ± 5°C, electrical tests D through H, K through P, and R through T shall be performed in the order specified in 4.4.2 using the 25 ± 5°C ambient end-of-life requirements in table I."

PAGE 41

TABLE XIV, Test conditions N45 and N46, A to pin column: Delete "39" (two places) and substitute "38" (two places).

PAGE 51

TABLE XV, Test conditions P45 and P46, A to pin column: Delete "39" (two places) and substitute "38" (two places).

PAGE 66

FIGURE 16: Delete and substitute new figure 16 as printed on page 3 of this amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0218)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:16Z
Check the source to verify that this is the current version before use.

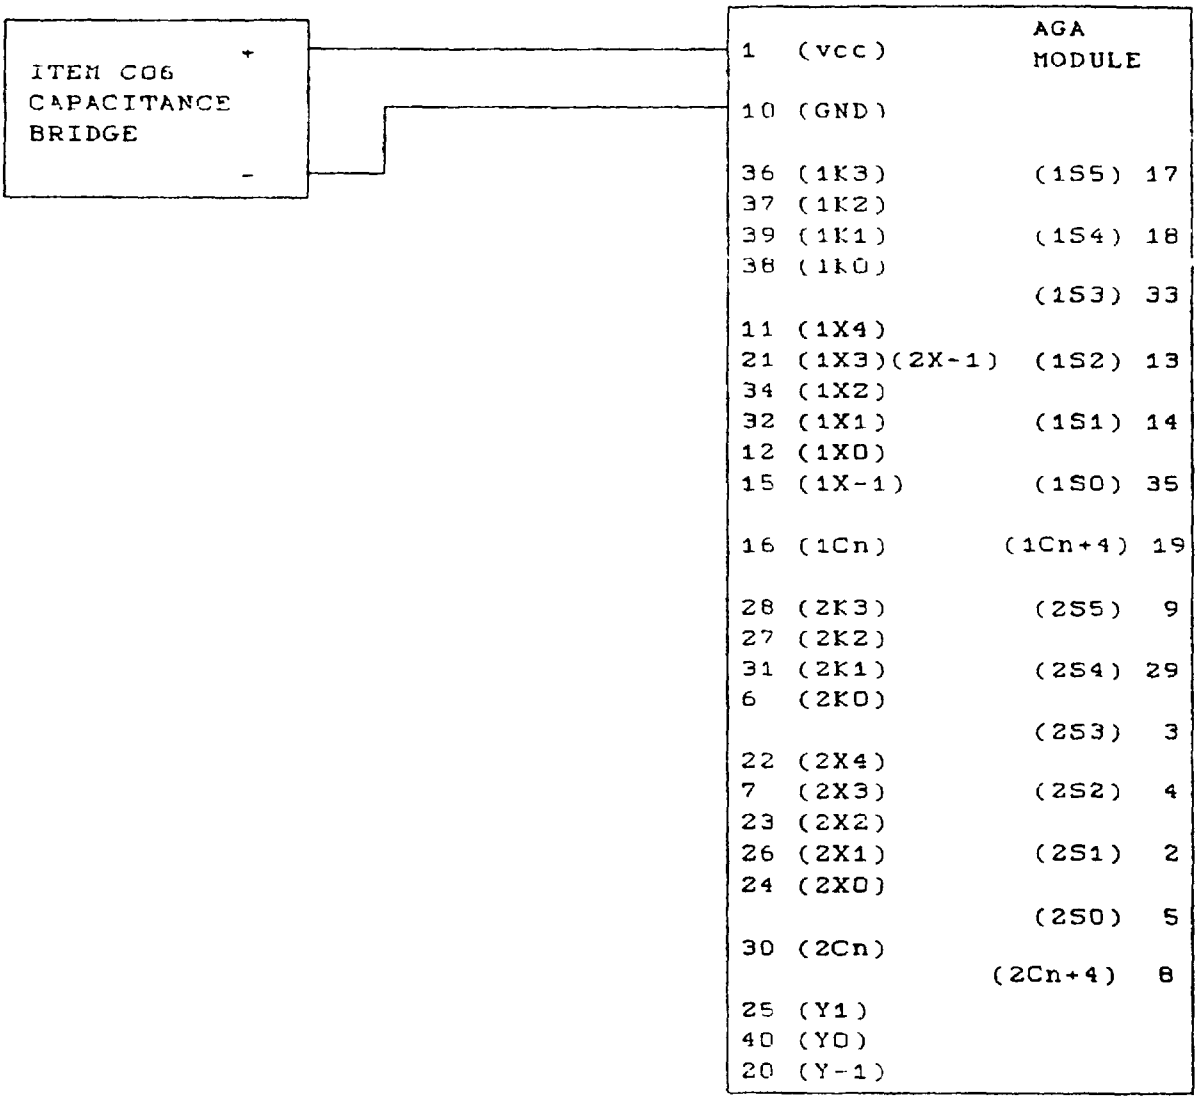

NOTE: Item C06 setup: Frequency = 1kHz.
V_{pk} = 0.3 V maximum.

FIGURE 16. Power supply filter capacitance test circuit for table XVII.

Source: https://assist.dla.mil -- Downloaded: 20260-20T17:16Z
Check the source to verify that this is the current version before use.