MIL-M-28787/270(EC)
AMENDMENT 2
30 October 1984
SUPERSEDING
AMENDMENT 1
5 February 1980

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

RELAY, ANALOG, KEY CODE ZRY

This amendment forms a part of Military Specification MIL-M-28787/270(EC), dated 21 August 1979, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* 1.2, first line: Delete "100°C" and substitute "85°C".

PAGE 3

* 4.3, delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 5

* TABLE I, column heading: Delete "100° ±5°C" and substitute "85° ±5°C".

PAGE 6

* 4.4.2, add the following sentence at the end of the paragraph:

"If test condition A or B is performed at any time during quality assurance inspection testing, they shall be followed by performance of at least all 100 percent tests."

PAGE 8

TABLE II, Test condition A8, Parameter column: Delete "(used to unused pins)" and substitute "(unused to unused pins)".

PAGE 21

FIGURE 9: Delete and substitute new figure 9 as printed on page 2 of this amendmentment.

NOTE: The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N629)

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

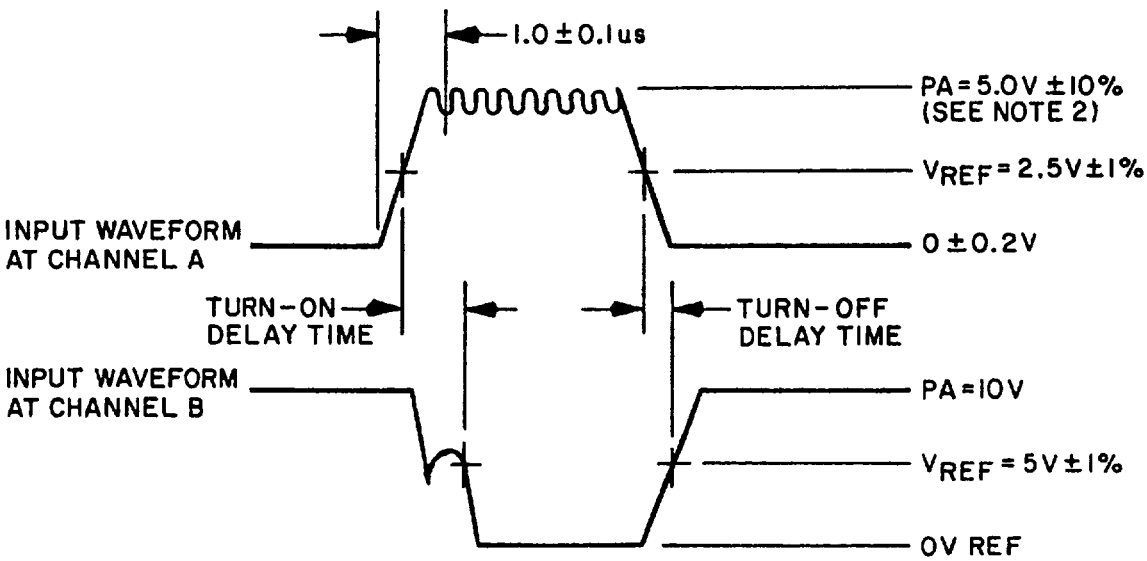

NOTES:
1. Turn-on delay time is measured to where the channel B voltage goes to the 5 V level and thereafter remains below 5 V until the turn-off command is given.
2. The 5.0 V ±10% level of the input pulse is measured at the center of the ripple 1.0 ±0.1 µs from the start of the trace.

FIGURE 9. Turn-on and turn-off delay time test circuit waveforms for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.