MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

RELAY, ANALOG, KEY CODE ZRX

This specification is approved for use by Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the procurement of an electronic relay module.

1.2 Module description. The following electrical parameters reflect the 0° to 60°C and -55° to 100°C end-of-life limits from table I.

Name		Relay	
Family		Analog	
Key code		ZRX	
Size		1A	
Weight		35 grams maximum	
Failure rate	Class I	0.112 failures/10^6 hours maximum	
	Class II	0.116 failures/10^6 hours maximum	
Environment		Class I or class II as specified in MIL-STD-1389	
Contact rating		±40 Vdc at 60 mA	
Maximum power dissipation		1.2 W (no load)	
Control voltage			
Low level		-0.2 V minimum, 0.4 V maximum	
High level		3.8 V minimum, 7.0 V maximum	
Closed contact resistance		Class I	Class II
V_{IN} = 7 V		5Ω maximum	7.5Ω maximum
V_{IN} = 5 V		7.5Ω maximum	10Ω maximum
V_{IN} = 3.8 V		15Ω maximum	20Ω maximum

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Electronic Systems Command, ATTN: ELEX 5043, Department of the Navy, Washington, D.C. 20360 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:17Z
Check the source to verify that this is the current version before use.

	Class I	Class II
Open contact resistance	1.0 MΩ minimum	500 kΩ minimum
Control current per relay V_{IN} = 7.0 V	30 mA maximum	34 mA maximum
Capacitance		
Open contacts	18 pF maximum	18 pF maximum
Input to contacts	15 pF maximum	15 pF maximum
Delay time		
Turn-on (1.0 kΩ load)	2.0 µs maximum	3.0 µs maximum
Turn-off (1.0 kΩ load)	10.0 µs maximum	12.0 µs maximum

1.3 Module function. This module contains five solid state relays each of which is normally open, single pole, single throw. The five relays have their positive control inputs bussed together and are normally connected to a high level. The negative control inputs are brought out for each relay, thus a low level applied to each of these causes that relay to close.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.
MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENT

3.1 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.2 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

3.3 Failure rate requirements. All modules procured to this specification shall have a predicted failure rate no greater than 0.112 failures per million operating hours for class I or 0.116 failures per million operating hours for class II, when predicted in accordance with MIL-STD-1389. When a class II module is used in a class I environment, failure rate for class I shall be used for reliability prediction (see 6.3).

3.4 Performance requirements. The module shall conform to the electrical requirements specified in table II. Class I modules shall conform to the electrical requirements of class I only, and class II modules shall conform to the electrical requirements of class I and class II (see 6.3).

3.5 Module configuration requirements. The module configuration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.5.1 Key code. The module key code shall be ZRX.

3.5.2 Size. The module size shall be 1A.

3.5.3 Weight. The module shall have a maximum weight of 35 grams.

3.5.4 Contact pins. The module shall have 20 contact pins positioned A1 through A20. Contact pins positioned A21 through A40 are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

3.5.5 Fin position. The module shall have an insertion and extraction and heat dissipation fin on increment A.

3.5.6 Depth. The module shall have no additional depth requirements.

3.5.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

3.5.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part number M28787/270-1 for class I and M28787/270-2 for class II, except no marking shall interfere with heat dissipation from the fin (for example, affixing a label which may be a heat barrier).

3.6 Circuit pin configuration. The function diagram and pin assignments shall conform to figure 1.

3.7 Acceptance test. All production modules shall be tested in accordance with notes 1 and 2 of table I.

3.8 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C end-of-life limits of table I(see 6.2).

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.

4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.

4.3 Test equipment. The following test equipment is necessary to conduct acceptance tests for this module. Test equipment shall be as specified in MIL-STD-1665 and that listed below:

Equipment	MIL-STD-1665 designator	No. required (maximum per test figure)
Function generator	Item G05	1
DC power supply	Item P01	2
Megohm bridge	Item R06	1
Multifunction digital meter	Item M02	1
DC ammeter	Item X05	1
Capacitance meter	Item C05	1
Oscilloscope	Item D01	1
Oscilloscope probe	Item Y02	2
Ohmmeter	Item R10	1
Power sine wave generator	Item G07	1
Distortion analyzer	Item B01	1
Resistors		
681Ω ±1%, 1.5 W		5
100Ω ±1%, 1/2 W		5
4.99 kΩ ±5%, 1/8 W		1
1.0 kΩ ±1%, 1/8 W		5
1.33 kΩ ± 1%, 1W		5
Capacitors		
50 ±5 pF		5
Switch		
DPDT		1

All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

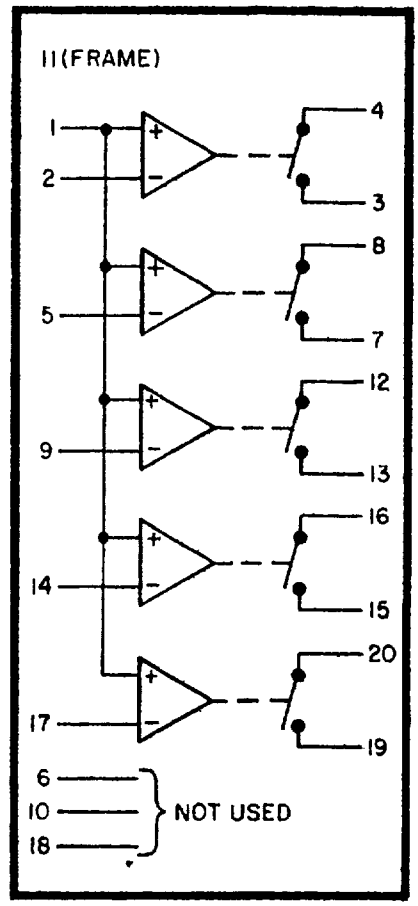


FIGURE 1. ZRX module diagram, relay.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

Test condition	Parameter	Ref test table	Test type (see notes)	-55° ±5°C Initial & end-of-life limits		0°±5°C Initial & end-of-life limits		25° ±5°C Initial & end-of-life limits		60°±5°C Initial & end-of-life limits		100°±5°C Initial & end-of-life limits		Unit
				Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
A1-A5	Isolation	II	X											
	Initial			10	∞	10	∞	10	∞	10	∞	10	∞	MΩ
	End-of-life			1.0	∞	1.0	∞	1.0	∞	1.0	∞	1.0	∞	MΩ
A6-A9	Isolation	II	X											
	Initial			10	∞	10	∞	10	∞	10	∞	10	∞	MΩ
	End-of-life			1.0	∞	1.0	∞	1.0	∞	1.0	∞	1.0	∞	MΩ
B1-B5	Closed contact resistance	III	X	0	5	0	5	0	3	0	5	0	7.5	Ω
B6-B10	Closed contact resistance	III	X	0	7.5	0	7.5	0	5	0	7.5	0	10	Ω
B11-B15	Closed contact resistance	III	X	0	15	0	15	0	10	0	15	0	20	Ω
B16-B20	Closed contact resistance	III	X	0	5	0	5	0	3	0	5	0	7.5	Ω
B21-B25	Closed contact resistance	III	X	0	7.5	0	7.5	0	5	0	7.5	0	10	Ω
B26-B30	Closed contact resistance	III	X	0	15	0	15	0	10	0	15	0	20	Ω
C1-C5	Open contact resistance	IV	X											
	Initial			10	∞	10	∞	10	∞	10	∞	1.0	∞	MΩ
	End-of-life			1.0	∞	1.0	∞	1.0	∞	1.0	∞	0.5	∞	MΩ
D1-D5	Control current	V	S	1	25	1	30	1	27	1	30	1	34	mA
E1-E5	Open contact capacitance	VI	S	2	18	2	18	2	18	2	18	2	18	pF
F1-F5	Input-to-contact capacitance	VI	S	1	15	1	15	1	15	1	15	1	15	pF
G1-G5	Turn-on delay time	VII	S	0	3	0	2	0	2	0	2	0	2	µs
H1-H5	Turn-off delay time	VII	S	0	12	0	10	0	10	0	10	0	10	µs
J	Continuity	VIII	S	0	1.0	0	1.0	0	1.0	0	1.0	0	1.0	Ω
K1-K10	Distortion	IX	X	0	1.0	0	1.0	0	1.0	0	1.0	0	1.0	%

NOTES:
1. (X) parameters shall be 100% tested during module acceptance tests.
2. (S) parameters shall be sample acceptance tested (1.0% or two modules from each inspection lot, whichever is greater) at 25°C.

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:17Z
Check the source to verify that this is the current version before use.

4 4 Test procedures. The module shall be tested as specified in table I.

4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Program Quality Assurance Activity (SEMP-QAA) and they conform to the requirements of MIL-M-28787.

4.4.2 Order of testing. Test conditions A through K shall be performed in any order with the following exceptions. If test conditions A and B are part of a sequence of tests, the order of testing shall be as follows: A, B where applicable, followed by the remaining tests in the sequence.

4.5 Qualification testing. Initial qualification tests and periodic-check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.

4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through K in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25° ±5°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions B through D, and G, H, and K shall be performed in the order specified in 4.4.2 using the initial limits for applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2.

4 5 1.1 Component temperature test. The component temperature test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2.

4.5 2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be nonoperating. Following the vibration tests, the electrical tests of table I which are marked with an (X) in the test type column shall be performed using the initial limits at 25° ±5°C ambient.

4 5.3 Life test The life test shall be conducted in accordance with MIL-M-28787 The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests B through D, G, H, and K shall be performed in the order specified in 4.4 2 using the operating temperature end-of-life requirements of table I. Following the return of the module to 25°C, electrical tests A through K shall be performed in the order specified in 4.4.2 using the 25° ±5°C ambient end-of-life requirements of table I.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.

6. NOTES

6 1 Definitions. Definitions are as specified in MIL-STD-1331.

6 2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements of table I, the module is considered to have completed its useful life(see 3.8).


6.3 Substitutability. Class II modules are substitutable for class I modules. When class II modules are used in a class I environment, the failure rate for class I shall be used for reliability prediction (see 3.3 and 3.4).

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N036)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

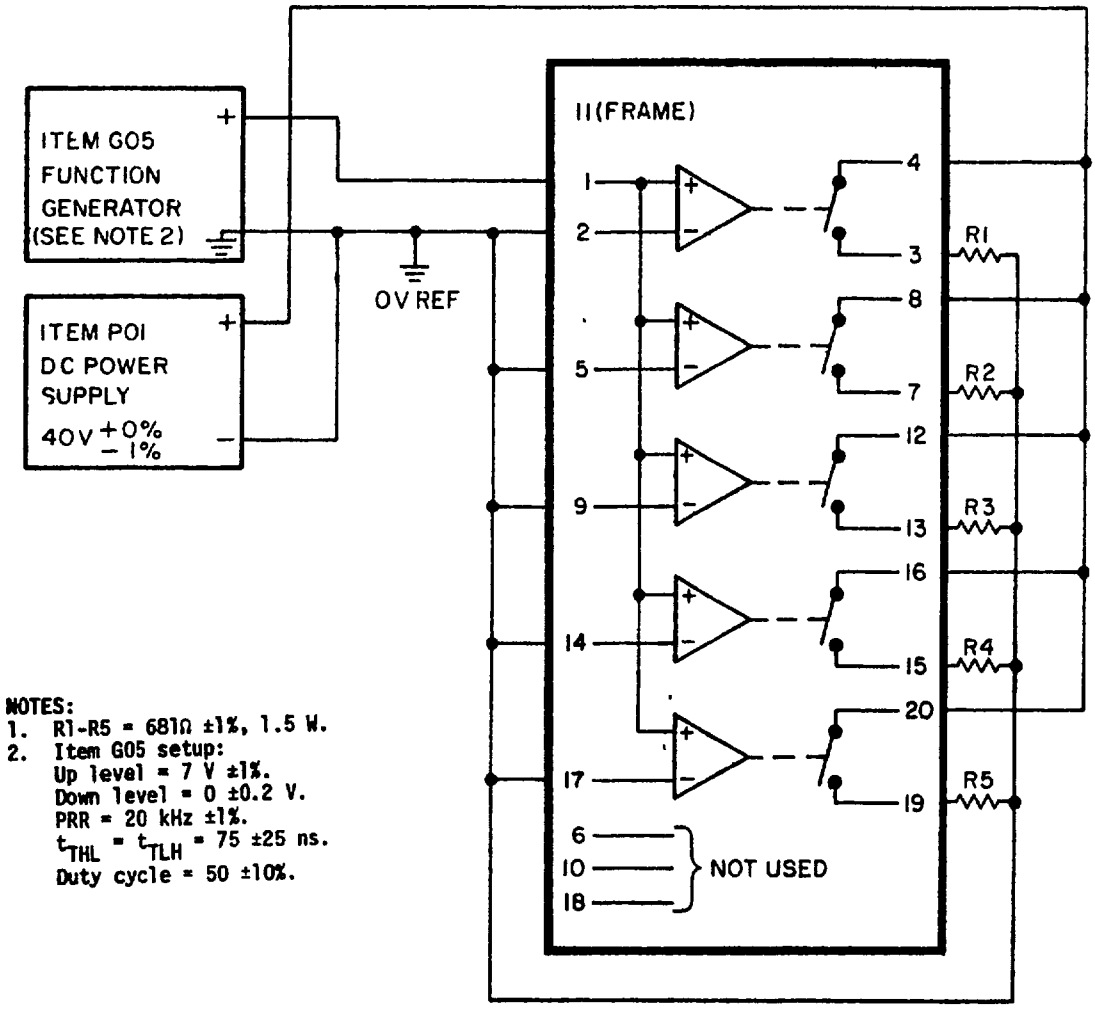

NOTES:
1. R1-R5 = 681Ω ±1%, 1.5 W.
2. Item G05 setup:
   Up level = 7 V ±1%.
   Down level = 0 ±0.2 V.
   PRR = 20 kHz ±1%.
   $t_{THL} = t_{TLH}$ = 75 ±25 ns.
   Duty cycle = 50 ±10%.


FIGURE 2. Operating temperature, component temperature and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

TABLE II. Isolation test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
A1	Isolation (frame pin to all pins)	1 through 10, 12 through 20	11	10	∞	MΩ	3
A2	(used to unused pins)	1-5, 7-9, 12-17,19,20	6,10,18				
A3	(unused to unused pins)	6	10,18				
A4	(unused to unused pins)	10	18				
A5	(control to contact)	1,2,5,9,14,17	3,4,7,8,12, 13,15,16,19, 20				
	Reverse isolation						
A6	(used to unused pins)	6,10,18	1-5, 7-9, 12-17,19,20				
A7	(unused to unused pins)	10,18	6				
A8	(used to unused pins)	18	10				
A9	(control to contact)	3,4,7,8,12,13, 15,16,19,20	1,2,5,9,14, 17	10	∞	MΩ	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

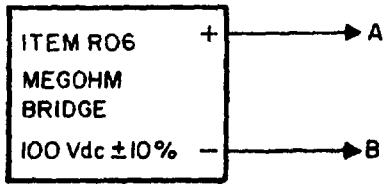

WARNING:

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

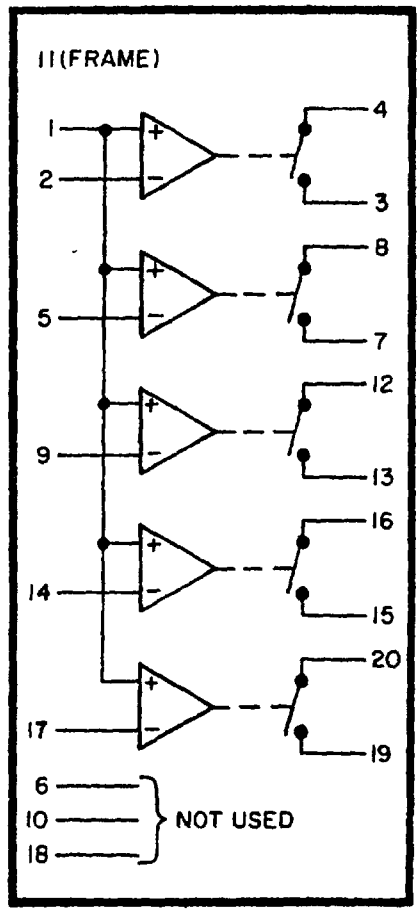


FIGURE 3. Isolation test circuit for table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

TABLE III. Closed contact resistance test.

Test condition	Parameter	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	Min	Max		
B1	Closed contact resistance (R_C)	4	0	175	mV	4
B2		8				
B3		12				
B4		16				
B5		20		175		
B6		4		143		
B7		8				
B8		12				
B9		16				
B10		20		143		
B11		4		136		
B12		8				
B13		12				
B14		16				
B15		20		136		
B16		4		-175		
B17		8		-175		
B18	Closed contact resistance (R_C)	12	0	-175	mV	4

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:17Z
Check the source to verify that this is the current version before use.


TABLE III. Closed contact resistance test.-Continued.

Test condition	Parameter	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	Min	Max		
B19	Closed contact resistance (R_C)	16	0	-175	mV	4
B20		20		-175		
B21		4		-143		
B22		8				
B23		12				
B24		16				
B25		20		-143		
B26		4		-136		
B27		8				
B28		12				
B29		16				
B30	Closed contact resistance (R_C)	20	0	-136	mV	4

NOTE:

$$R_C = \frac{TCB(100\Omega)}{VL-TCB}$$

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:17Z
Check the source to verify that this is the current version before use.

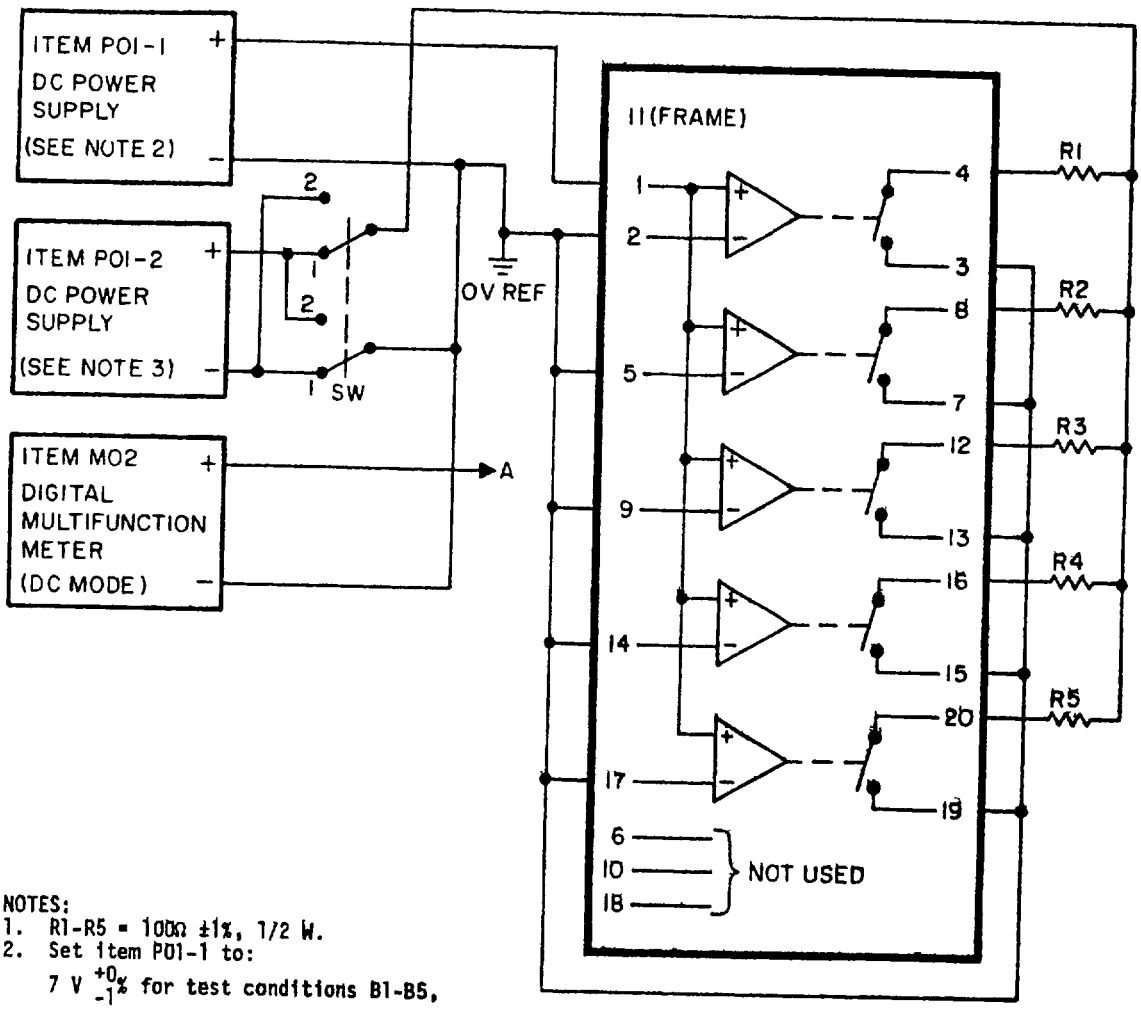

NOTES:
1. R1-R5 = 100Ω ±1%, 1/2 W.
2. Set item PO1-1 to:
   7 V $^{+0}_{-1}$% for test conditions B1-B5, B16-B20; 5 V ±1% for test conditions B6-B10, B21-B25; 3.8 V ±1% for test conditions B11-B15, B26-B30.
3. Set item PO1-2 to:
   6.0 V ±1% for test conditions B1-B5, B16-B20; 3.0 V ±1% for test conditions B6-B10, B21-B25; 1.5 V ±1% for test conditions B11-B15, B26-B30.
4. Set switch SW to position 1 for test conditions B1-B15 and position 2 for test conditions B16-B30.

FIGURE 4. Closed contact resistance test circuit for Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

TABLE IV. Open contact resistance test.


Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
C1	Open contact resistance	3	4	0	2	µA	5
C2	↓	7	8	↓	↓	↓	↓
C3		12	13				
C4		15	16				
C5	Open contact resistance	19	20	0	2	µA	5

NOTE:

Table I value = $\frac{20\ V}{T.C.C}$

(The 4.99 kΩ is less than 1% of the table I value)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

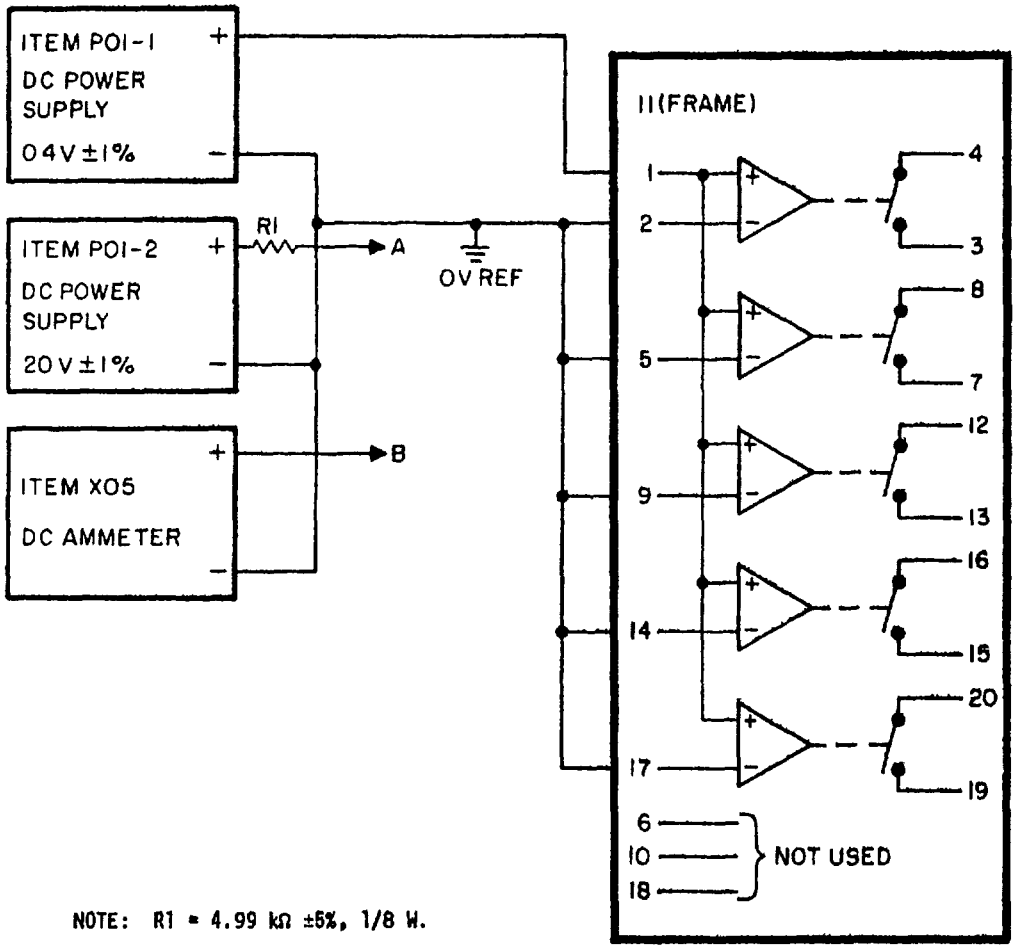

NOTE: R1 = 4.99 kΩ ±5%, 1/8 W.

FIGURE 5. Open contact resistance test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:17Z
Check the source to verify that this is the current version before use.

TABLE V. Control current test.

Test condition	Parameter	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	Min	Max		
D1	Control current	2	1	27	mA	6
D2	↓	5	↓	↓	↓	↓
D3		9				
D4		14				
D5	Control current	17	1	27	mA	6

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:17Z
Check the source to verify that this is the current version before use.

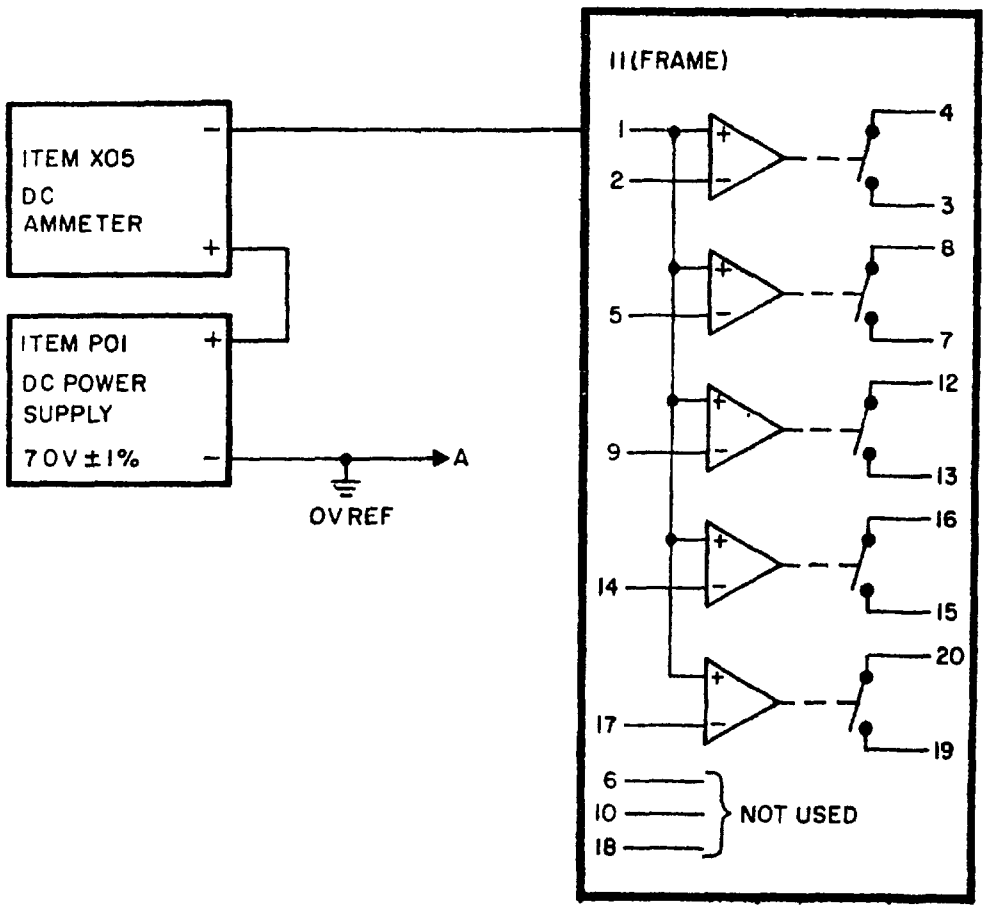



FIGURE 6. Control current test circuit for table V.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

TABLE VI. Open contact and input-to-contact capacitance test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
E1	Open contact capacitance	3	4	2	18	pF	7
E2		7	8				
E3		12	13				
E4		15	16				
E5	Open contact capacitance	19	20	2	18		
F1	Input-to-contact capacitance	1,2	3,4	1	15		
F2		1,5	7,8				
F3		1,9	12,13				
F4		1,14	15,16				
F5	Input-to-contact capacitance	1,17	19,20	1	15	pF	7

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:17Z
Check the source to verify that this is the current version before use.

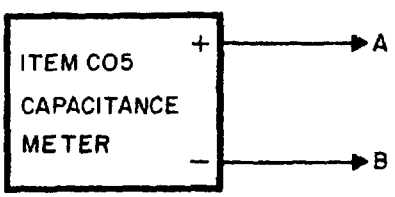

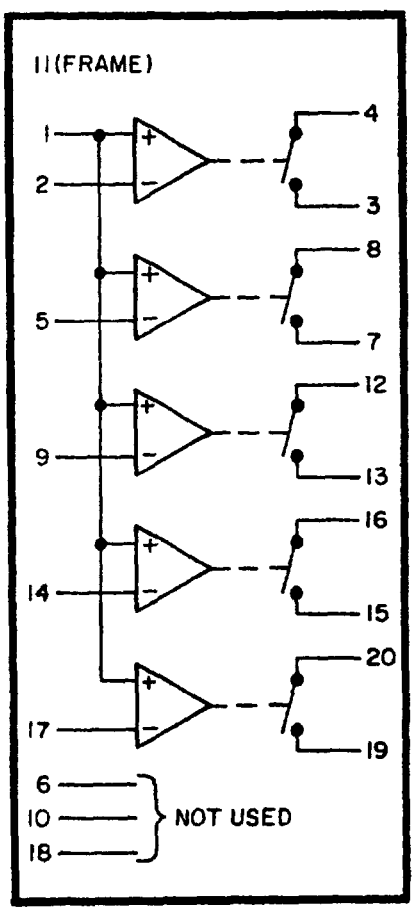

NOTES:
1. Connect only pins listed in table VI.
2. Null out the effects of test leads prior to taking readings.


FIGURE 7. Open contact and input-to-contact capacitance test circuit for table VI.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:17Z
Check the source to verify that this is the current version before use.

TABLE VII. Turn-on and turn-off delay time test.

Test condition	Parameter	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	Min	Max		
G1	Turn-on delay time	4	0	2	µs	8,9
G2		8				
G3		12				
G4		16				
G5	Turn-on delay time	20		2		
H1	Turn-off delay time	4		10		
H2		8				
H3		12				
H4		16				
H5	Turn-off delay time	20	0	10	µs	8,9

Source: https://assist.dla.mil -- Downloaded: 20260-20T17:17Z
Check the source to verify that this is the current version before use.

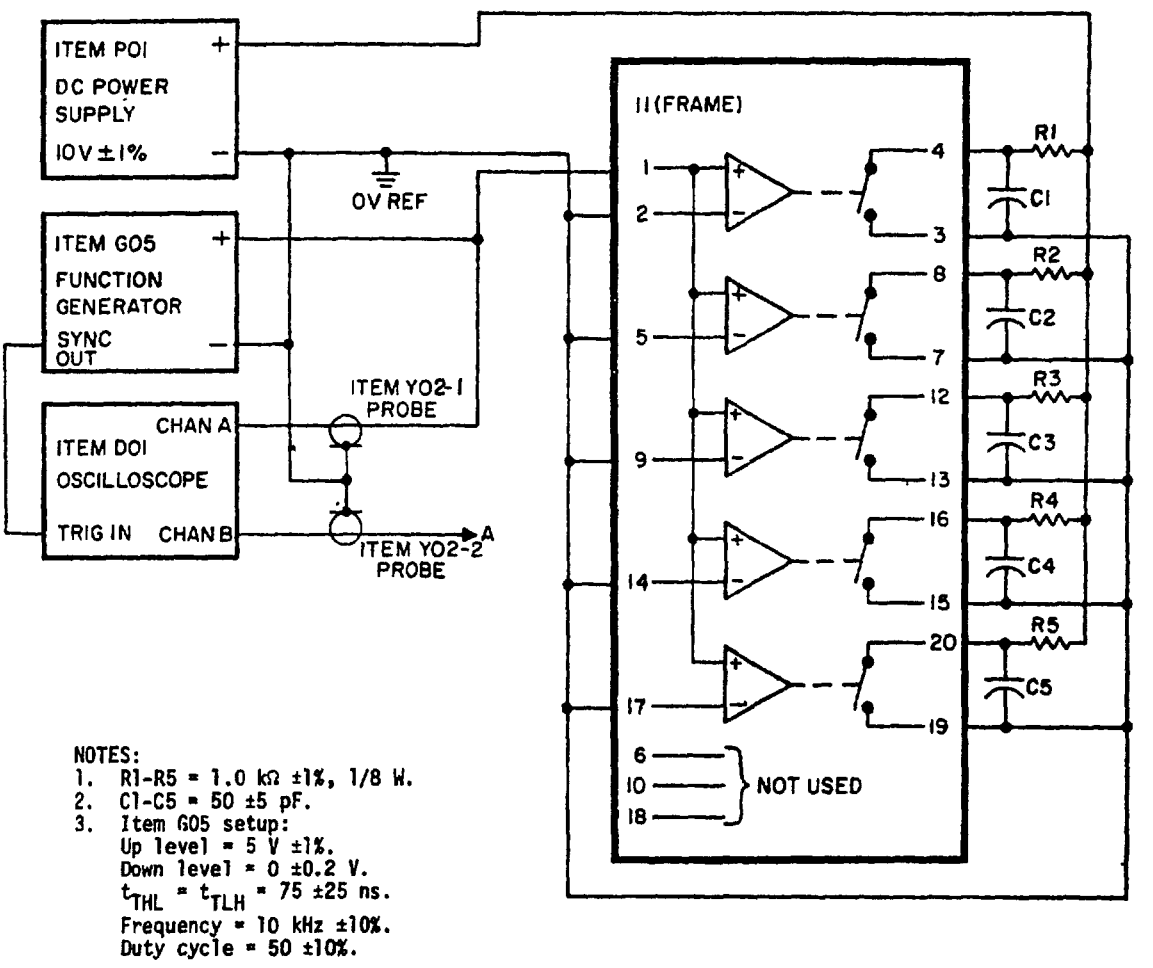

NOTES:
1. R1-R5 = 1.0 kΩ ±1%, 1/8 W.
2. C1-C5 = 50 ±5 pF.
3. Item G05 setup:
   Up level = 5 V ±1%.
   Down level = 0 ±0.2 V.
   $t_{THL} = t_{TLH}$ = 75 ±25 ns.
   Frequency = 10 kHz ±10%.
   Duty cycle = 50 ±10%.

FIGURE 8. Turn-on and turn-off delay time test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:17Z
Check the source to verify that this is the current version before use.

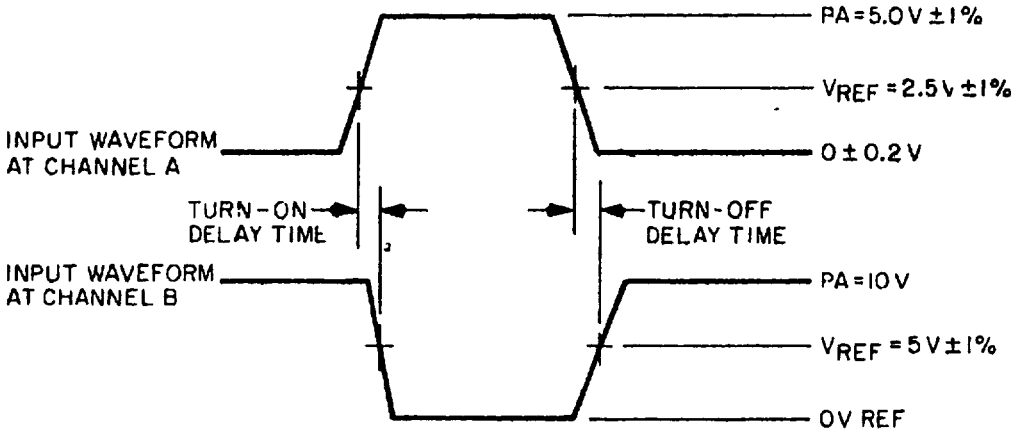



FIGURE 9. Turn-on and turn-off delay time test circuit waveforms for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

TABLE VIII. Continuity test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
J	Continuity	11	Frame	0	1	Ω	10

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T17:17Z
Check the source to verify that this is the current version before use.

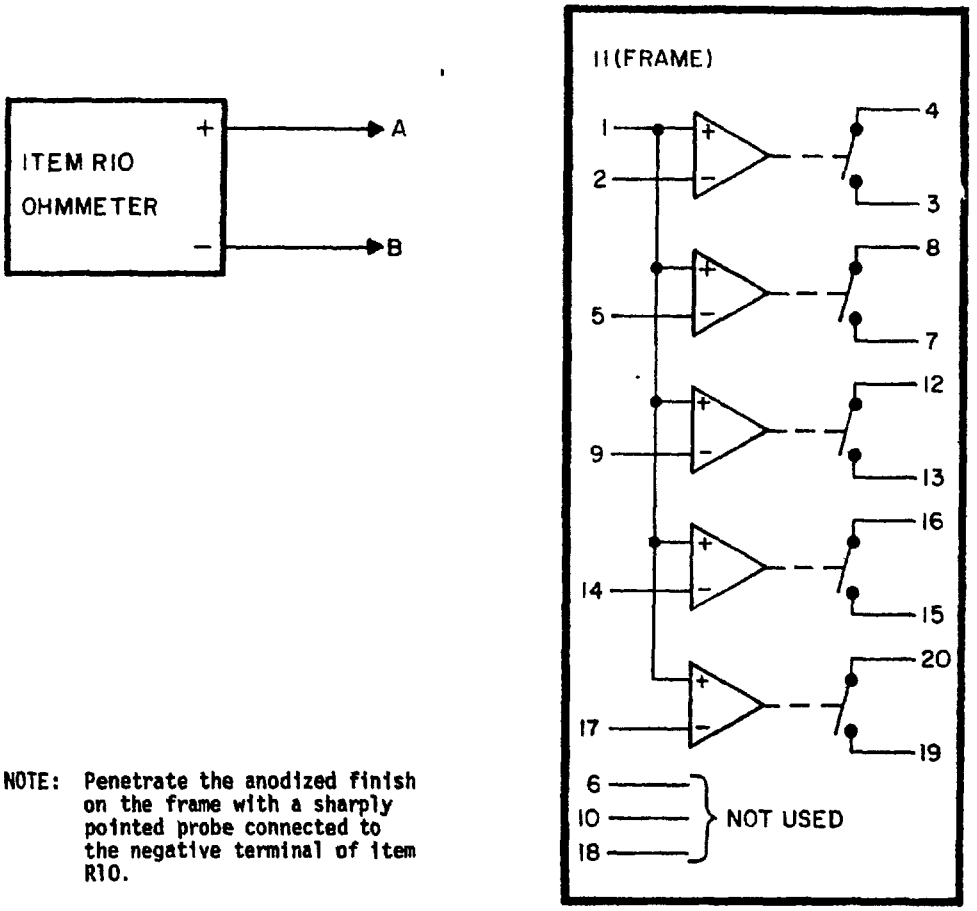

NOTE: Penetrate the anodized finish on the frame with a sharply pointed probe connected to the negative terminal of item R10.


FIGURE 10. Continuity test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:17Z
Check the source to verify that this is the current version before use.

TABLE IX. Distortion test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
K1	Distortion	4	3	0	1.0	%	11
K2	↓	8	7	↓	↓	↓	↓
K3		12	13				
K4		16	15				
K5		20	19				
K6		4	3				
K7		8	7				
K8		12	13				
K9	↓	16	15	↓	↓	↓	↓
K10	Distortion	20	19	0	1.0	%	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

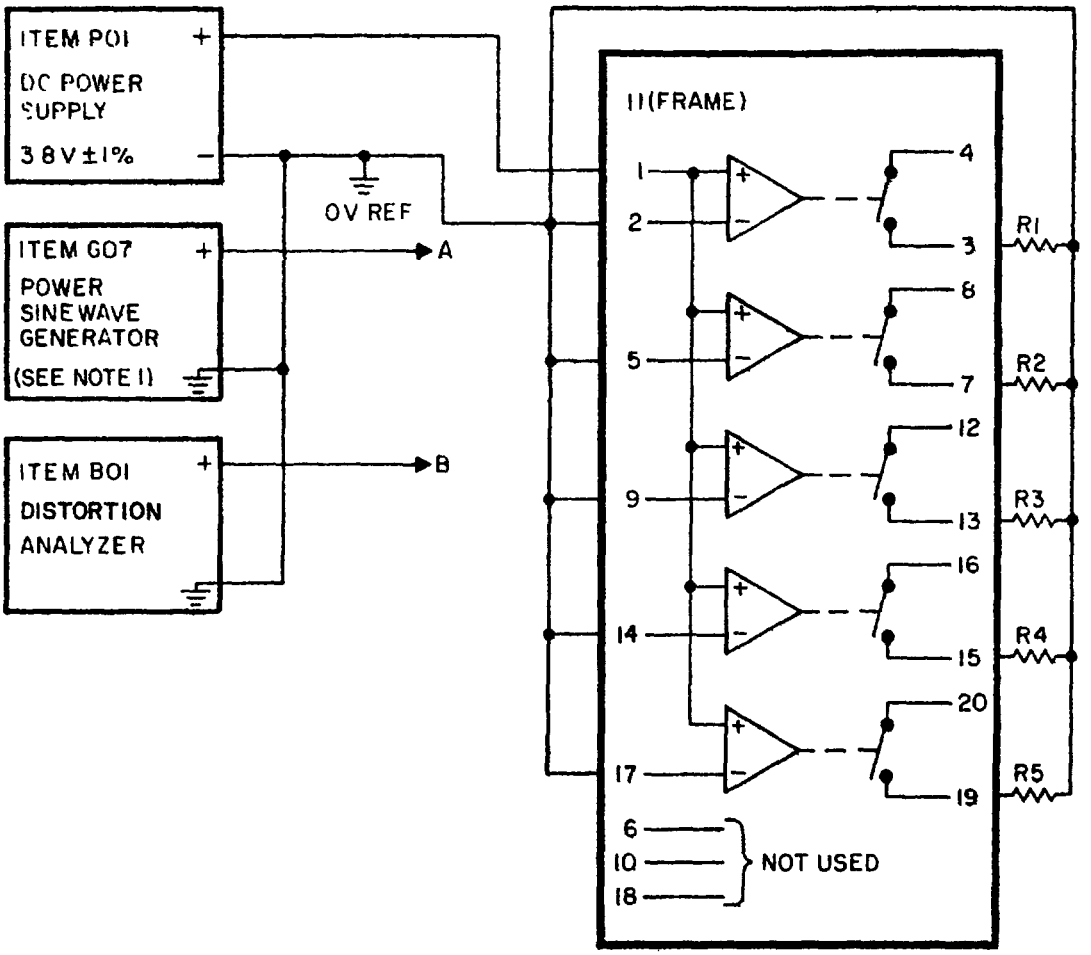

NOTES:
1. Item G07 setup:
   Sinewave amplitude = 28 Vrms ±1%.
   Frequency = 100 Hz ±1% for test conditions K1-K5.
   = 10 kHz ±1% for test conditions K6-K10.
2. R1-R5 = 1.33 kΩ ±1%, 1 W.
3. For each measurement, measure distortion at point "A" (with point "A" connected).
   For test condition "K" calculate the module distortion as follows:

$$D_{module} = \sqrt{D^2_B - D^2_A}.$$

FIGURE 11. Distortion test circuit for table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-M-28787/270

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:17Z
Check the source to verify that this is the current version before use.