INCH-POUND

MIL-M-28787/271A
AMENDMENT 1
31 March 1993

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

CONVERTER, BINARY/BCD, DIGITAL, KEY CODE RQB

This amendment forms a part of Military Specification MIL-M-28787/271A(EC), dated 12 October 1983, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test conditions D1-D12, Test type column: Delete "X" and substitute "S".

PAGE 5

TABLE I, Test conditions S1-S16, Max columns: Delete "15" (five places) and substitute "20" (five places).

PAGE 6

4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through S shall be performed in any order with the following exceptions. Test conditions A, B, C, and D are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, or D are part of a sequence of tests, the order of testing shall be as follows: A, B, C, and D where applicable, followed by the remaining tests in the sequence."

4.5.1, fifth line: Delete "D through Q" and substitute "E through Q".

4.5.3, third line: Delete "D through Q" and substitute "E through Q".

4.5.3, sixth line: Delete "D through S" and substitute "E through S".

PAGE 7

6.4, Enable recovery time, Class I: Delete "65 maximum" (one place) and substitute "60 maximum" (one place).

6.4, Enable recovery time, Class II: Delete "65 maximum" (one place) and substitute "63 maximum" (one place).

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:17Z
Check the source to verify that this is the current version before use.

PAGE 45

FIGURE 22, Title: Delete "figure 21" (one place) and substitute "table XV" (one place).

PAGE 48

TABLE XIX, Test conditions S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S13, S14, S15, and S16, Max column: Delete "15" (one place) and substitute "20" (one place).

PAGE 51

FIGURE 25: Delete and substitute new figure 25 as printed on page 3 of this amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0220)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:17Z
Check the source to verify that this is the current version before use.

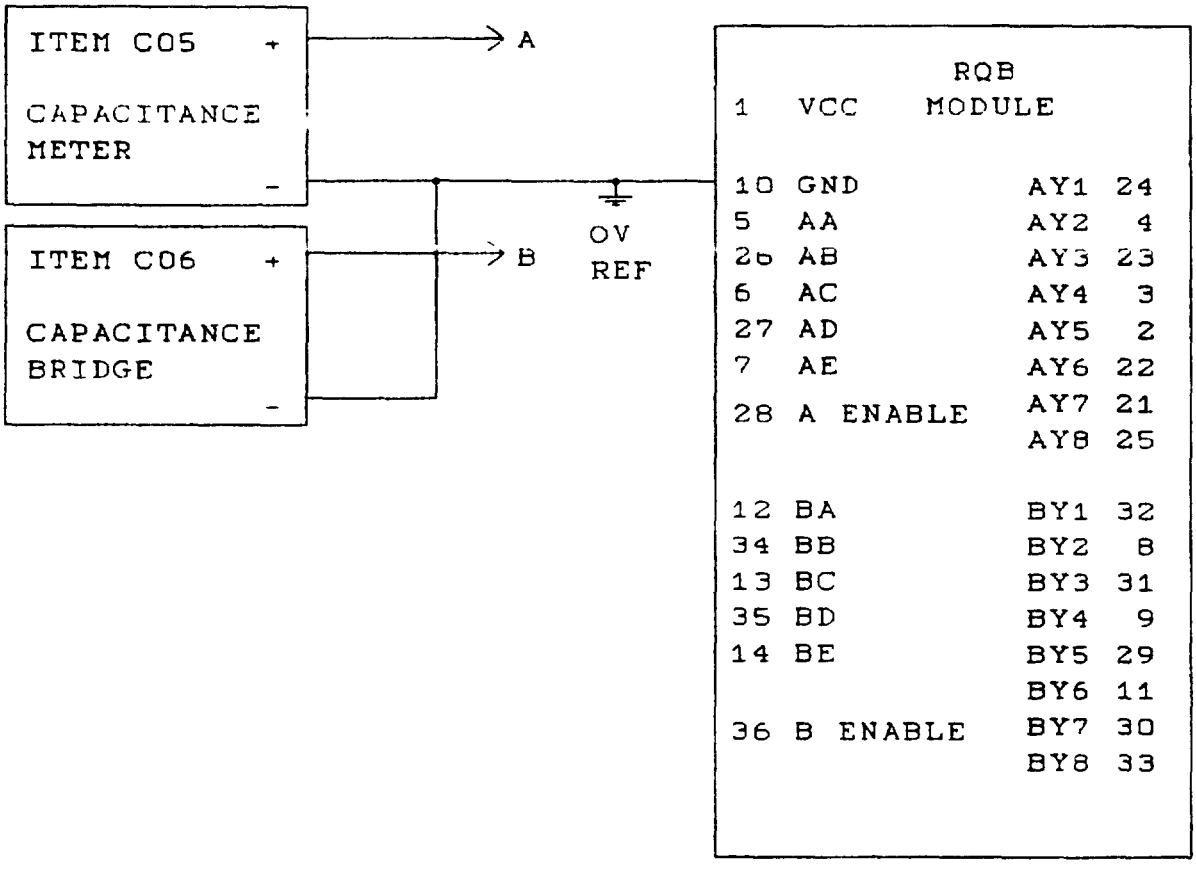

NOTES:

1. **Null out the effects of the test leads prior to connecting the module.**
2. **Do not attach test connectors or wires to any of the module pins other than pin 10 and the pin under test. Stray capacitance added to other pins may affect the readings.**
3. **Item C06 setup:**
   Frequency = 1 KHz.
   V_{ac} = 0.3 V maximum.

FIGURE 25. Power supply filter, input, and output capacitance test circuit for tables XVII, XVIII, and XIX.

Source: https://assist.dla.mil -- Downloaded: 202610-20T17:17Z
Check the source to verify that this is the current version before use.