INCH-POUND

MIL-M-28787/272A
AMENDMENT 2
31 March 1993
SUPERSEDING
AMENDMENT 1
20 December 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

CONVERTER, BCD/BINARY, DIGITAL, KEY CODE ZEZ

This amendment forms a part of Military Specification MIL-M-28787/272A(EC), dated 3 August 1983, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

*TABLE I, Test conditions D1-D12, Test type column: Delete "X" and substitute "S".

TABLE I, Test conditions L1-L16, Min columns: Delete "5" (five places) and substitute "2" (five places).

PAGE 5

TABLE I, Test conditions R1-R12, Max columns: Delete "15" (five places) and substitute "20" (five places).

TABLE I, Test conditions column: Delete "S1-S12" and substitute "S1-S16".

TABLE I, Test conditions S1-S16, Max columns: Delete "15" (five places) and substitute "20" (five places).

PAGE 6

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through S shall be performed in any order with the following exceptions. Test conditions A, B, C, and D are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, or D are part of a sequence of tests, the order of testing shall be as follows: A, B, C, and D where applicable, followed by the remaining tests in the sequence."

*4.5.1, Fifth line: Delete "D through Q" and substitute "E through Q".

*4.5.3, Third line: Delete "D through Q" and substitute "E through Q".

*4.5.3, sixth line: Delete "D through S" and substitute "E through S".

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:18Z
Check the source to verify that this is the current version before use.

PAGE 7

*6.4, Capacitance, Input and output, Class I and Class II: Delete "15 maximum" (four places) and substitute "20 maximum" (four places).

*6.5.1, First sentence: Delete and substitute the following:

"Each digital converter, BCD/binary, module has the input to output relationship in table II. Input conditions other than those shown produce high levels on all outputs."

PAGE 8

*TABLE II, BCD words 8-9, Y1 output: Delete "H" and substitute "L".

PAGE 16

*TABLE V, Test condition C12, Parameter column: Delete "B" and substitute "B Enable".

PAGE 21

*TABLE VII, Test condition E15, Connect B to pin column: Delete "15" and substitute "16".

PAGE 34

TABLE XIII, Test conditions L1 through L16, Min column: Delete "5" and substitute "2".

PAGE 47

TABLE XVIII, Test conditions R1 through R12, Max column: Delete "15" and substitute "20".

PAGE 48

TABLE XIX, Test conditions S1 through S16, Max column: Delete "15" and substitute "20".

PAGE 51

*FIGURE 25: Delete and substitute new figure 25 as printed on page 4 of this amendment.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:18Z
Check the source to verify that this is the current version before use.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0221)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:18Z
Check the source to verify that this is the current version before use.

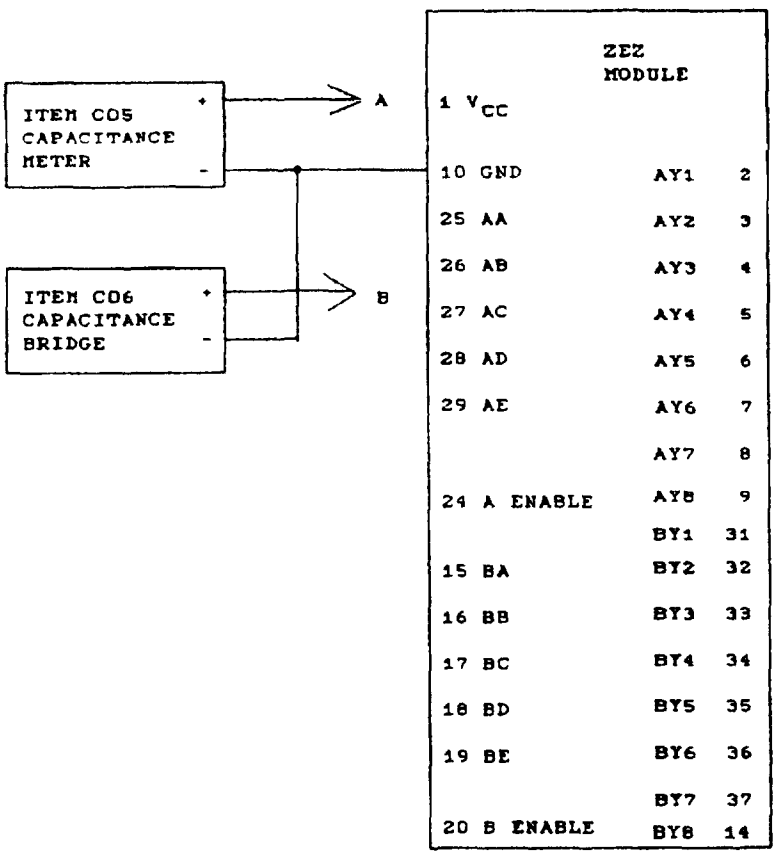

NOTES:

1. Null out the effects of the test leads prior to connecting the module.
2. Do not attach test connector or wires to any of the module pins other than pin 10 and the pin under test. Stray capacitance added to other pins may affect the readings.
3. Item C06 setup: Frequency = 1 kHz.
   V_{pk} = 0.3 V maximum.

FIGURE 25. Power supply filter capacitance, input, and output capacitance test circuit for tables XVII, XVIII and XIX.

Source: https://assist.dla.mil -- Downloaded: 202640-20T17:18Z
Check the source to verify that this is the current version before use.