MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MEMORY, RANDOM ACCESS, DIGITAL, KEY CODE KYF

This amendment forms a part of Military Specification MIL-M-28787/286(EC), dated 14 June 1979, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2, Weight: Delete "35" and substitute "40".

PAGE 4

* 2: Delete and substitute the following.

"2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.

MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence."

3.5.3: Delete "35" and substitute "40".

PAGES 5 and 15

4.3: Delete and substitute.

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

Source: https://assist.dla.mil - Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

FSC 5963

PAGE 9

TABLE II, Test condition P2-P6: Delete and substitute.

P2	Power supply current	XIV	X	20	275	20	275	20	275	20	275	mA	
P3-P6	Power supply current	XIV	X	50	275	50	275	50	275	50	275	mA	"

PAGE 36

FIGURE 16: Delete and substitute new figure 16 as printed on page 4 of this amendment.

PAGE 38

FIGURE 17: Delete and substitute new figure 17 as printed on page 5 of this amendment.

PAGE 48

FIGURE 21: Delete and substitute new figure 21 as printed on page 6 of this amendment. (Notes for figure 21 printed on page 49 are not to be deleted).

PAGE 52

TABLE XIV: Delete and substitute new table XIV as printed on page 7 of this amendment.

PAGE 62

* FIGURE 28: Delete and substitute new figure 28 as printed on page 8 of this amendment.

PAGE 83

FIGURE 34, item J01-2 block: Add a "+" at the top connection to item J01-2.

PAGE 84

FIGURE 35, note 2: Delete and substitute.

"2. Items J01-1 and J01-2 are required due to excessive module loading of a single pulse generator."

PAGE 88

FIGURE 36, note 2, second line: Delete "than pin 10" and substitute "than pins 10 and 30".

NOTE: The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

Agent:
DLA-ES

Preparing activity:
Navy - EC

(Project 5963-N573)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

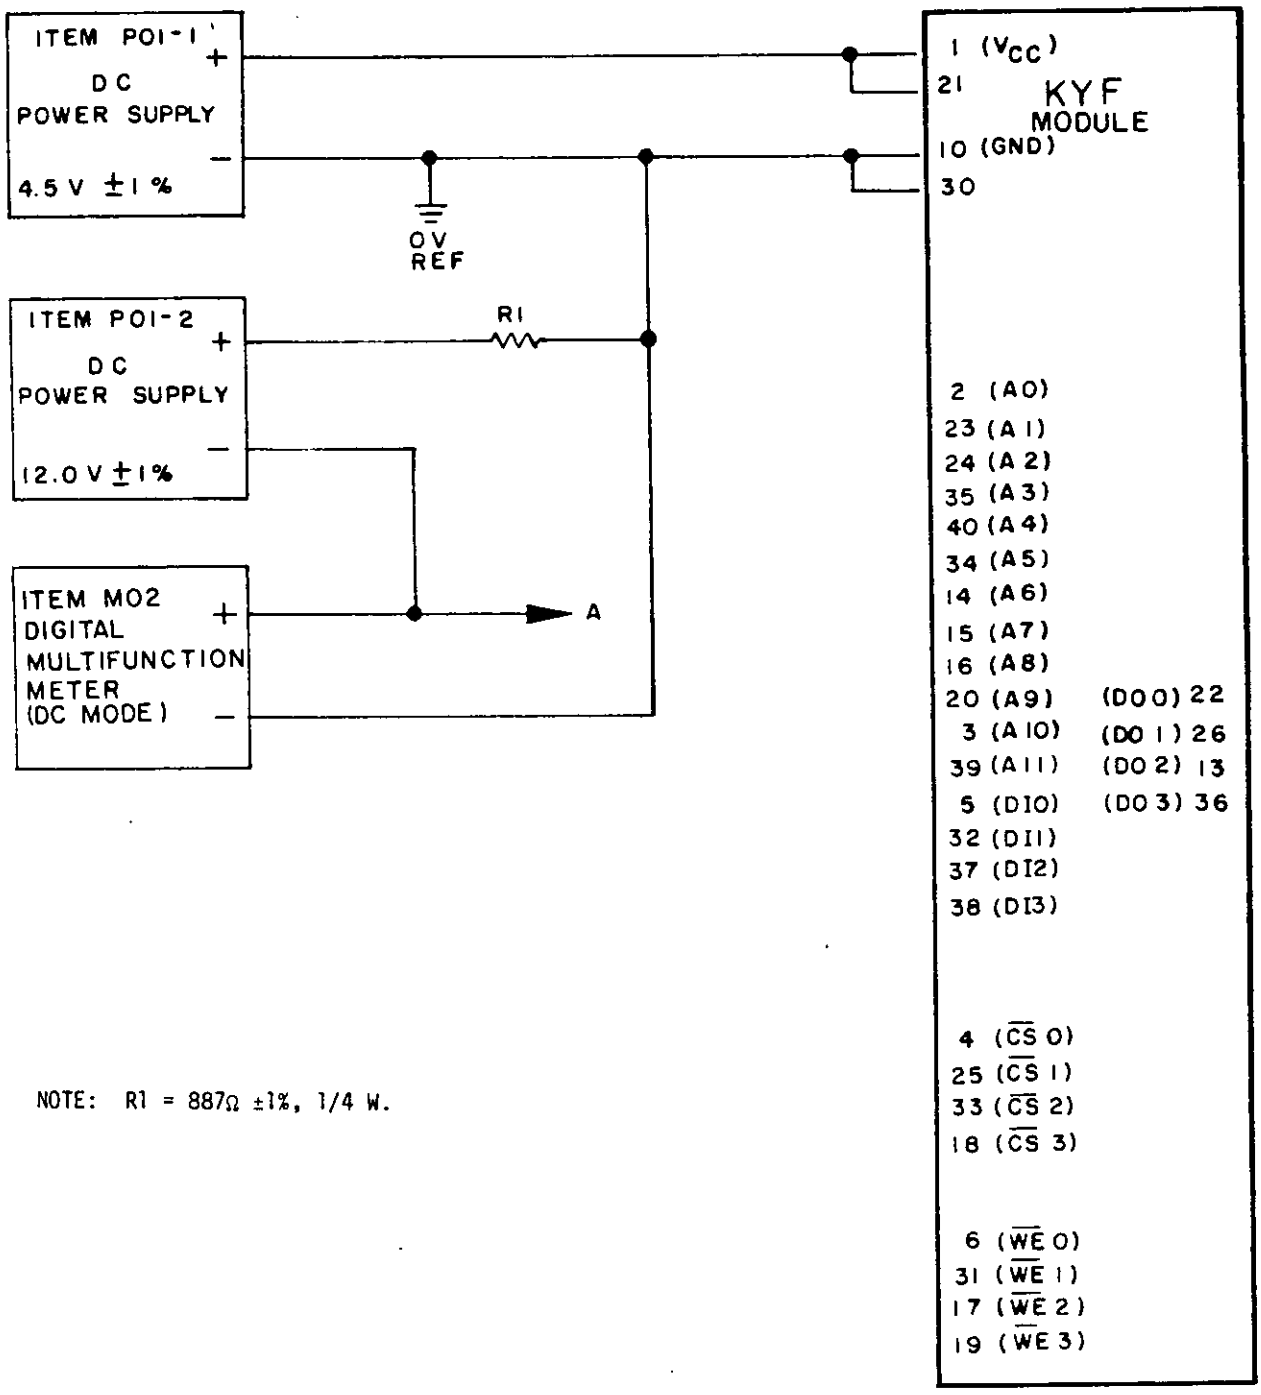

NOTE: R1 = 887Ω ±1%, 1/4 W.

FIGURE 16. Input clamp diode voltage test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

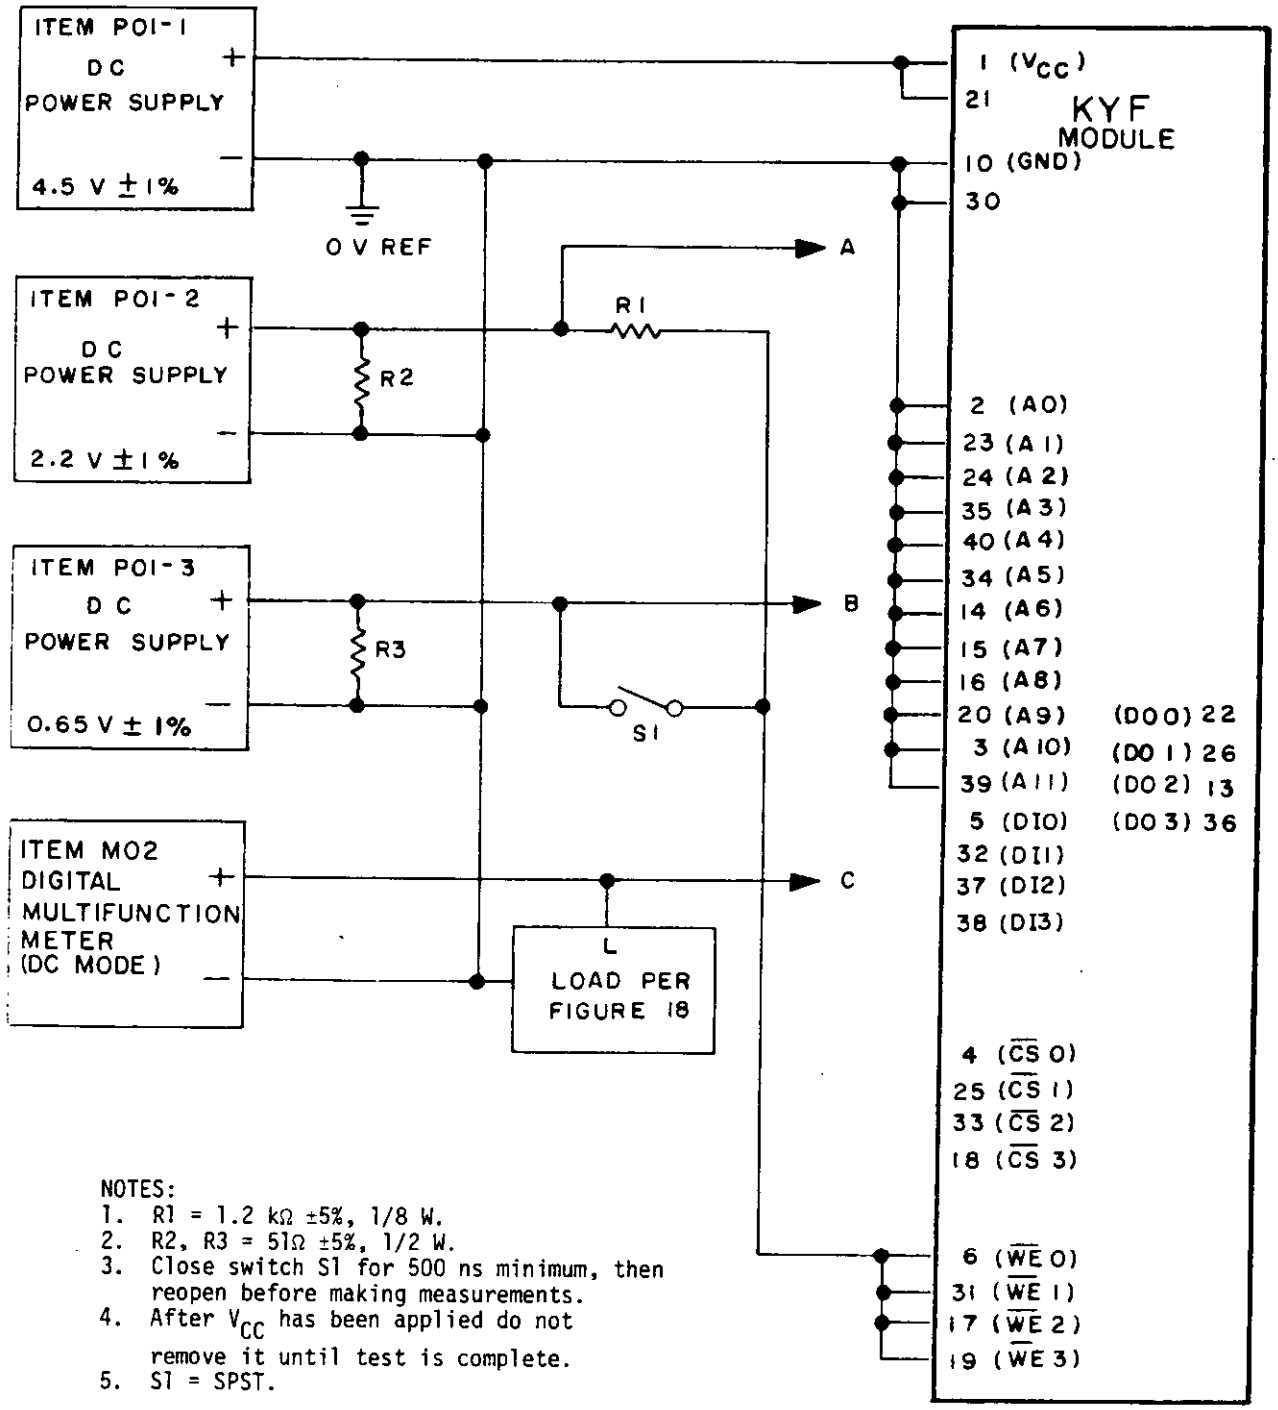

NOTES:
1. R1 = 1.2 kΩ ±5%, 1/8 W.
2. R2, R3 = 51Ω ±5%, 1/2 W.
3. Close switch S1 for 500 ns minimum, then reopen before making measurements.
4. After V_{CC} has been applied do not remove it until test is complete.
5. S1 = SPST.

FIGURE 17. Static output voltage (low-level and high-level) test circuit for table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

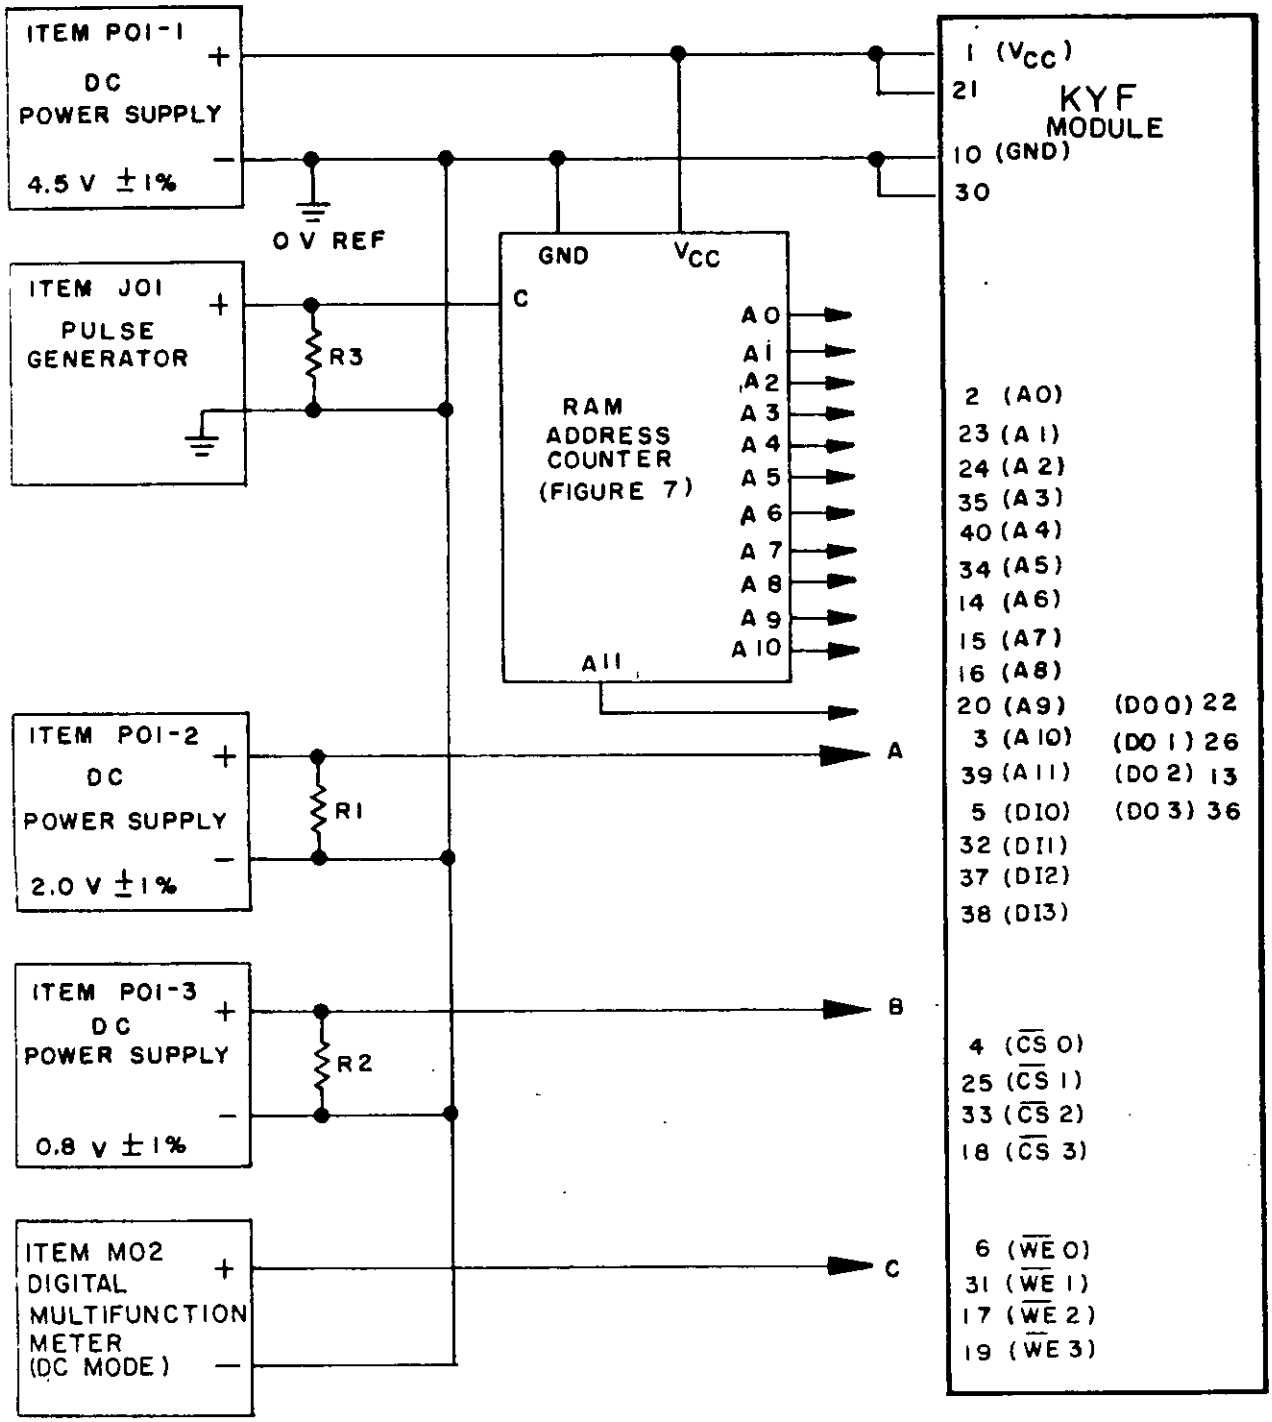



FIGURE 21. Address input threshold check (low-level and high-level) test circuit for table XII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

TABLE XIV. Power supply current test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
P1	Power supply current	4,25,33,18	Open	50	694	mA	23
P2	↓	Open	4,25,33,18	20	275	↓	↓
P3		4	18,25,33	50	↓		
P4		25	4,18,33	↓			
P5		33	4,18,25				
P6		18	4,25,33				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

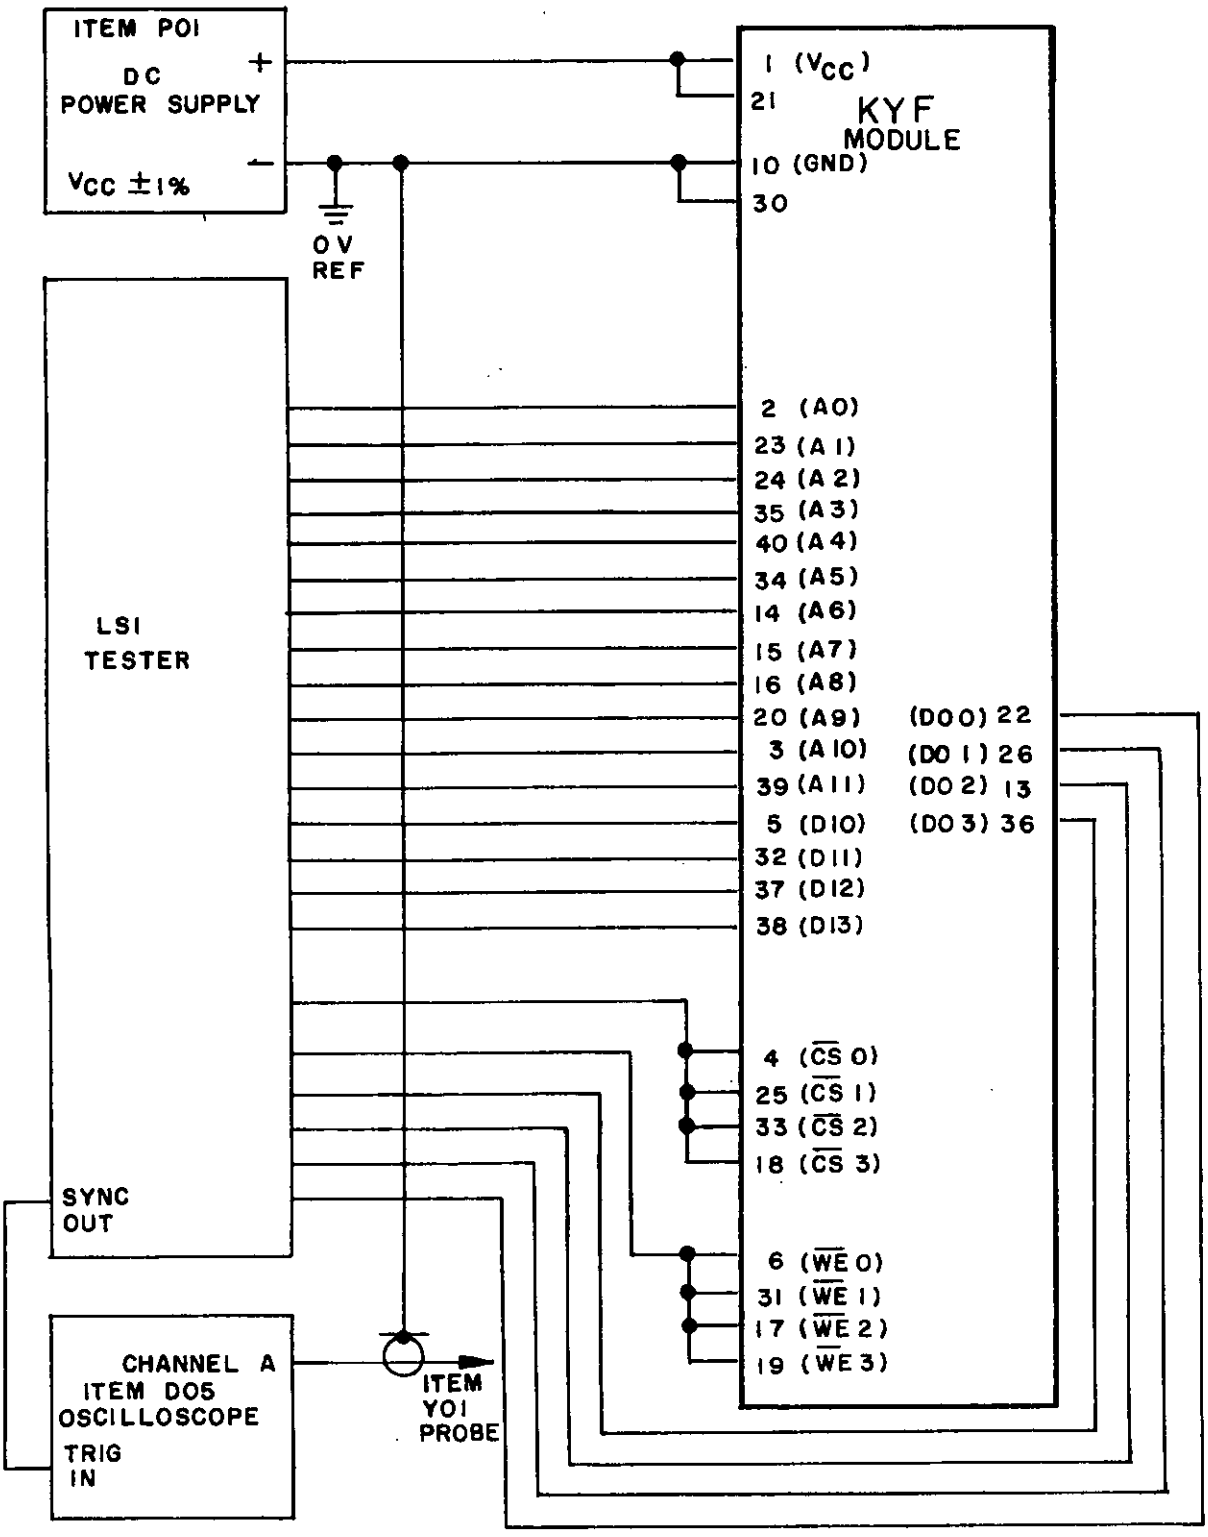

NOTES:
1. V_{CC} = 4.5 V ±1% for test conditions S1, S3, S5, S7, S9 and S11.
2. V_{CC} = 5.5 V ±1% for test conditions S2, S4, S6, S8, S10 and S12.
3. Load output pins 13, 22, 26 and 36 with load as specified on figure 18 with C_L = 50 pF for test conditions S1-S6.
4. Load output pins 13, 22, 26 and 36 with load as specified on figure 18 with C_L = 150 pF for test conditions S7-S12.

FIGURE 28. Dynamic test circuit for table XVII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.