INCH-POUND

MIL-M-28787/286
AMENDMENT 3
30 July 1993
SUPERSEDING
AMENDMENT 2
23 September 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MEMORY, RANDOM ACCESS, DIGITAL, KEY CODE KYF

This amendment forms a part of Military Specification MIL-M-28787/286(EC), dated 14 June 1979, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2, Weight: Delete "35" and substitute "40".

PAGE 4

*2: Delete and substitute the following:

"2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification and standards. The following specification and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.

MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained."

3.5.3: Delete "35" and substitute "40".

PAGES 5 and 15

*4.3: Delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. Unless otherwise specified, all resistors shall be metal film and all capacitors shall be ceramic."

PAGE 8

*TABLE II, Test conditions C5-C16, C17-C24, F1-F4, and G1-G4, Test type column: Delete "X" (four places) and substitute "S" (four places).

PAGE 9

TABLE II, Test conditions P2-P6: Delete and substitute the following:

"

P2	Power supply current	XIV	X	20	275	20	275	20	275	20	275	mA	
P3-P6	Power supply current	XIV	X	50	275	50	275	50	275	50	275	mA	"

PAGE 15

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through X shall be performed in any order with the following exceptions. Test conditions A, B, C, G, and F are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, G, or F are part of a sequence of tests, the order of testing shall be as follows: A, B, C, G, and F where applicable, followed by the remaining tests in the sequence."

*4.5.1, line 5: Delete "D through V" and substitute "D, E, H through V".

*4.5.3, line 3: Delete "D through V" and substitute "D, E, H through V".

PAGE 16

*4.5.3, line 6: Delete "D through X" and substitute "D, E, H through X".

PAGE 36

FIGURE 16: Delete and substitute new figure 16 as printed on page 5 of this amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

PAGE 38

FIGURE 17: Delete and substitute new figure 17 as printed on page 6 of this amendment.

PAGE 48

FIGURE 21: Delete and substitute new figure 21 as printed on page 7 of this amendment. (Notes for figure 21 printed on page 49 are not to be deleted).

PAGE 52

TABLE XIV: Delete and substitute new table XIV as printed on page 8 of this amendment.

PAGE 62

FIGURE 28: Delete and substitute new figure 28 as printed on page 9 of this amendment.

PAGE 83

FIGURE 34, Item J01-2 block: Add a "+" at the top connection to Item J01-2.

PAGE 84

FIGURE 35, NOTE 2: Delete and substitute the following:

"2. Items J01-1 and J01-2 are required due to excessive module loading of a single pulse generator."

PAGE 88

***FIGURE 36, ITEM C01 box:** Delete "C01" and substitute "C06".

FIGURE 36, NOTE 2, second line: Delete "than pin 10" and substitute "than pins 10 and 30".

***FIGURE 36, NOTE 3, first line:** Delete "(C01)" and substitute "(C06)".

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.


Custodians:
Army - ER
Navy - NW
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0226)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

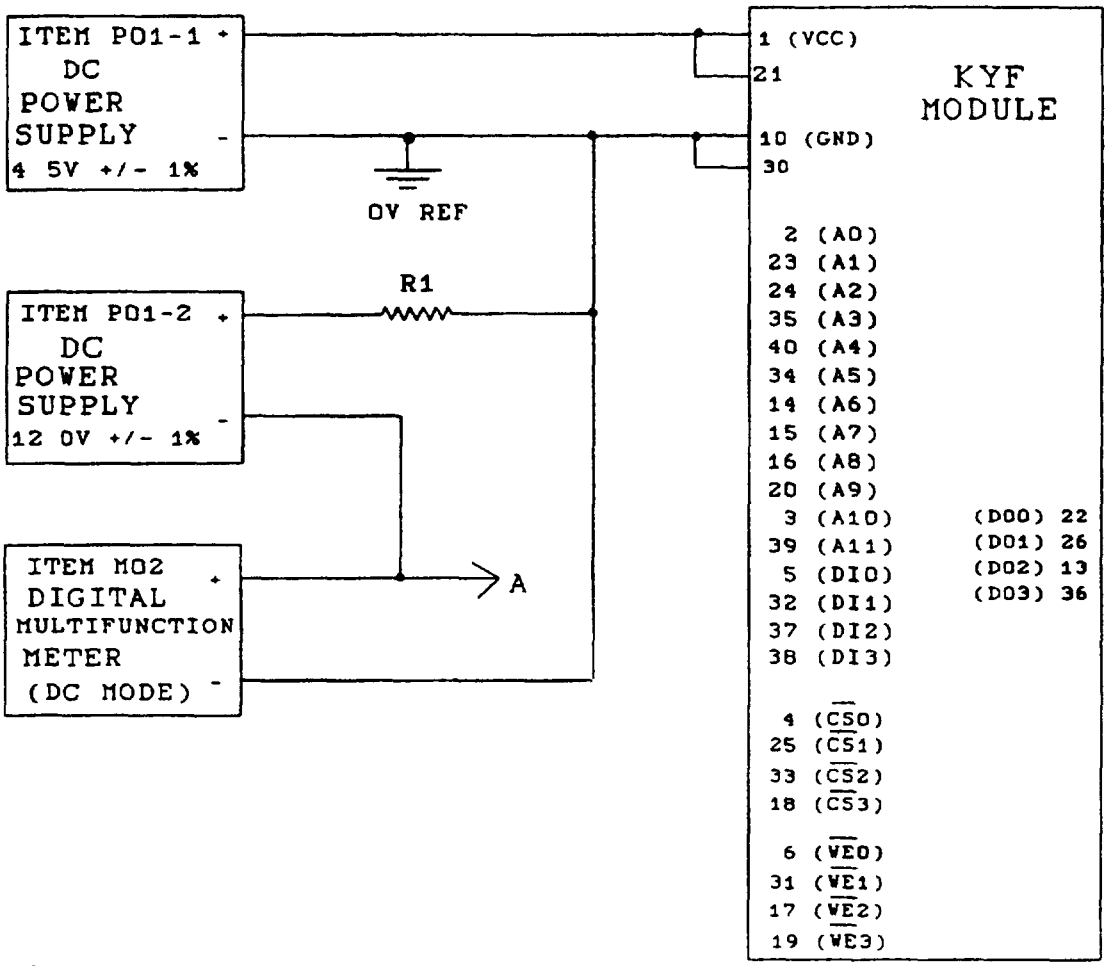

NOTE: R1 = 887Ω ± 1%, 1/4 W.

FIGURE 16. Input clamp diode voltage test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

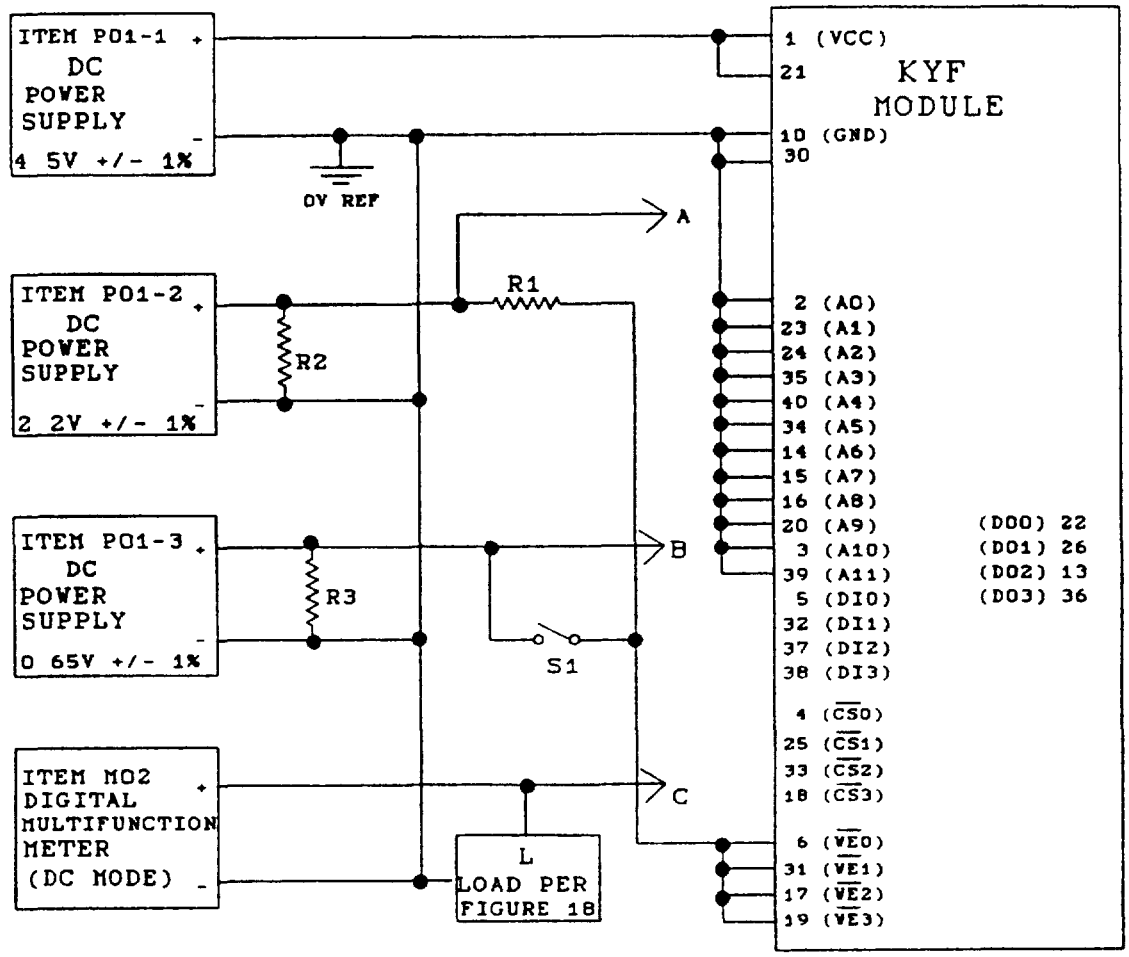

NOTES:
1. R1 = 1.2 kΩ ± 5%, 1/8 W.
2. R2, R3 = 51Ω ± 5%, 1/2 W.
3. Close switch S1 for 500 ns minimum, then reopen before making measurements.
4. After VCC has been applied, do not remove it until test is complete.
5. S1 = SPST.

FIGURE 17. Static output voltage (low-level and high-level) test circuit for table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

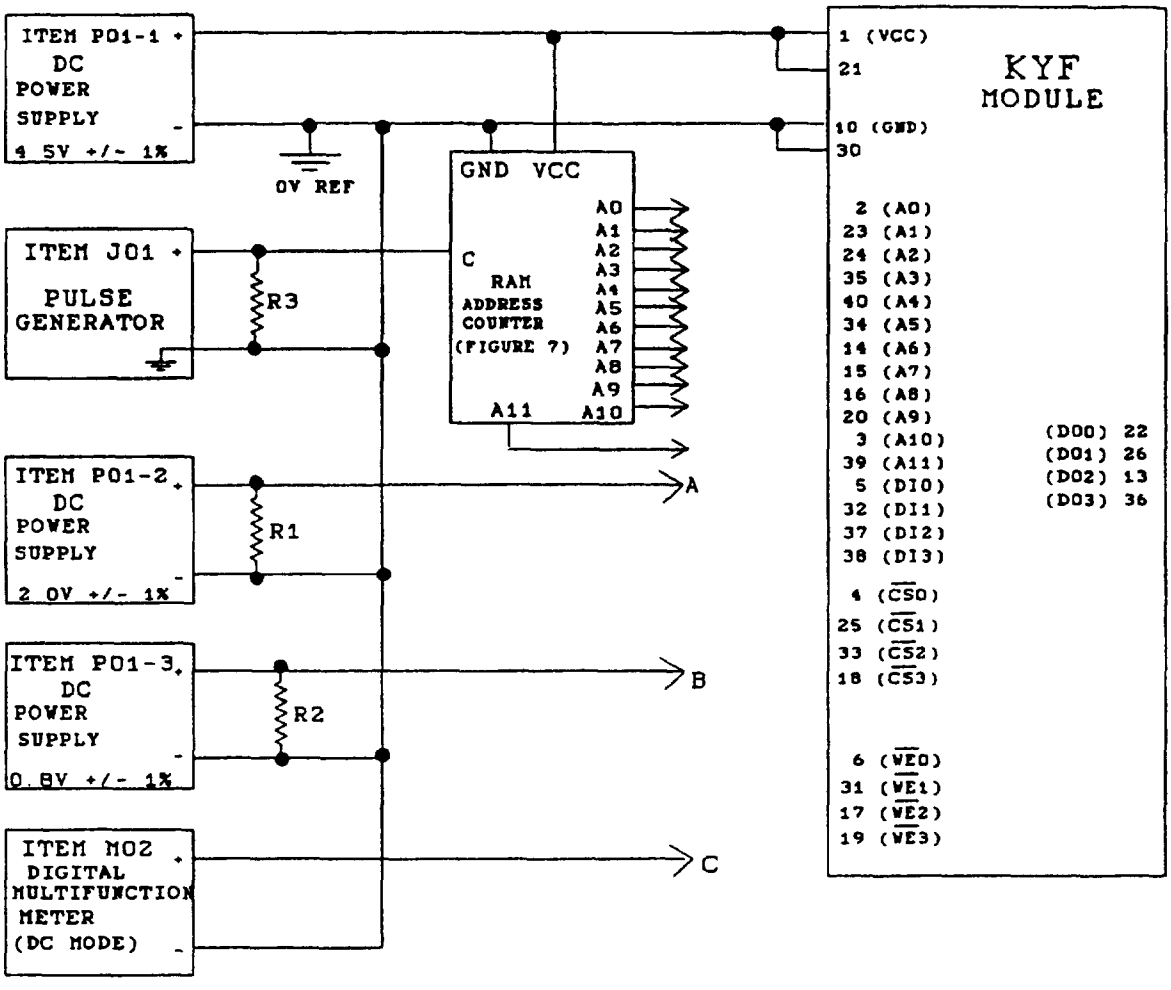



FIGURE 21. Address input threshold check (low-level and high-level) test circuit for table XII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

TABLE XIV. Power supply current test.

Test condition	Parameter	Connect		Initial limits 25°±5°C ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
P1	Power supply current	4,25, 33,18	Open	50	694	mA	23
P2		Open	4,25, 33,18	20	275		
P3		4	18, 25,33	50			
P4		25	4,18, 33				
P5		33	4,18, 25				
P6	Power supply current	18	4,25, 33	50	275	mA	23

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.

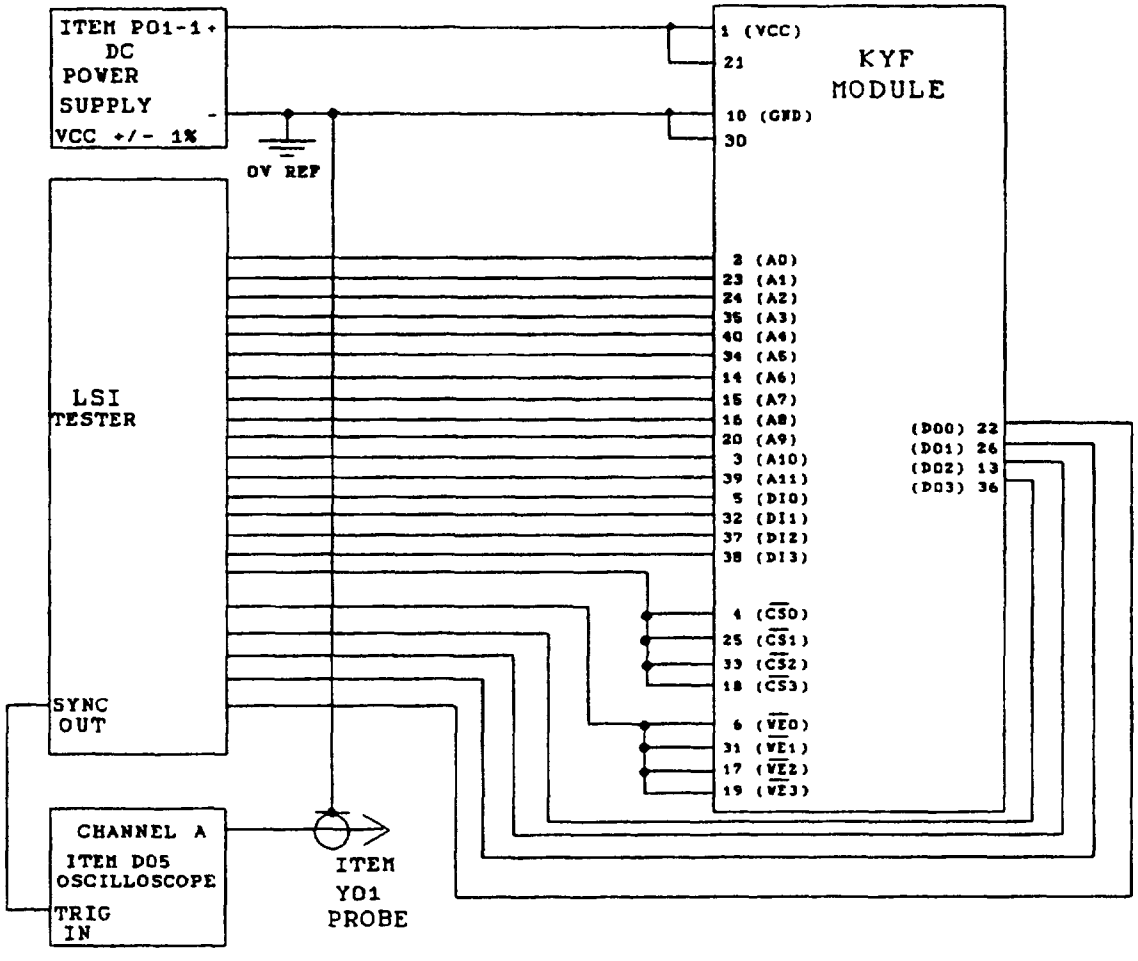

NOTES:

1. VCC = 4.5V ± 1% for test conditions S1, S3, S5, S7, S9 and S11.
2. VCC = 5.5V ± 1% for test conditions S2, S4, S6, S8, S10 and S12.
3. Load output pins 13, 22, 26 and 36 with load as specified on figure 18 with CL = 50 pF for test conditions S1-S6.
4. Load output pins 13, 22, 26 and 36 with load as specified on figure 18 with CL = 150 pF for test conditions S7-S12.

FIGURE 28. Dynamic test circuit for table XVII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:22Z
Check the source to verify that this is the current version before use.