[METRIC]
A-A-2546B
March 24, 1994
SUPERSEDING
A-A-2546A
January 7, 1994

COMMERCIAL ITEM DESCRIPTION

PAD, WRITING PAPER (REPOSITIONABLE)

The General Services Administration has authorized the use of this commercial item description , for all Federal Agencies.

Scope. This description covers pads of repositionable, colored, note paper. Each sheet has a strip of pressure sensitive adhesive on the back side.

1. Classification:

1.1 Size. Size of the pads shall be furnished as specified in the ordering description.

Size	Horizontal (width)	Vertical (length)
1	12.7 cm (5 in.)	7.6 cm (3 in.)
2	7.6 cm (3 in.)	7.6 cm (3 in.)
3	5.1 cm (2 in.)	3.8 cm (1.5 in.)
4	5.1 cm (2 in.)	7.6 cm (3 in.)
5	10.1 cm (4 in.)	15.2 cm (6 in.)

2. Regulatory requirements. The contractor shall certify that the minimum content standard of the paper and backing sheet offered shall be no less than 50% recovered materials including 20% postconsumer materials in accordance with Executive Order 12873,section 504(b), dated Oct. 20,1993 (see definitions of postconsumer materials and recovered materials in sections 203 and 205). As an alternative to meeting the standards of section 504(b) for all printing and writing papers, the minimum content standard shall be no less than 50% recovered materials that are a waste

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to General Services Administration Federal Supply Service, Engineering Branch, 26 Federal Plaza New York, N.Y. 10278.

Distribution Statement A:
Approved for public release;
Distribution is unlimited.

FSC7530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

material byproduct of a finished product other than a paper or textile product which would otherwise be disposed of in a landfill, as determined by the State in which the facility is located, in accordance with Executive Order 12873, section 504(c) dated October 20, 1993. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

2.1 Labeling of recycled content. The backing sheet of each pad, and the unit pack shall be labeled with the recycled content contained in the product.

3. Requirements.

3.1 Paper. Paper used in the construction of the pad shall be of the color as specified in the ordering description, and shall conform to the requirements in Table I.

TABLE I

PROPERTY	REQUIREMENTS	TEST METHOD
Basis Weight g/m2 (lbs. 17x22-500) +\- 5%	75 (20#)	T410
Thickness, mm (inches)	0.094 +/- 0.013 (0.0037 +/- 0.0005)	T411

3.2 Adhesive coating. Each sheet of paper in the pad shall have a coating of repositionable, pressure-sensitive adhesive located on the back side of the sheet. The adhesive coating shall be applied flush to one horizontal edge of the sheet, shall extend the entire width of the sheet, and shall have a minimum width of 6.4 mm (1/4 inch). It shall not be possible to easily rub any adhesive from the back of the sheet with a finger.

3.3 Tolerances. The tolerances of the pads are as follows:

Size	Tolerance
1	+/- 0.16 cm (+/- 1/16 in.)
2	+/- 0.16 cm (+/- 1/16 in.)
3	+/- 0.08 cm (+/- 1/32 in.)
4	+/- 0.16 cm (+/- 1/16 in.)
5	+/- 0.16 cm (+/- 1/16 in.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

3.4 Construction. A minimum average of 100 sheets of paper shall be assembled in the form of a pad. No individual pad shall contain less than 97 sheets. The pad paper and a backing sheet shall be securely fastened together by means of the repositionable, pressure-sensitive adhesive coating.

3.5 Performance.

3.5.1 The sheets of pad paper shall not exhibit feathering, spreading, skipping, beading, visible discontinuities or fading of ink when written on with a felt tip, permanent marker or ball point pen. The sheets of pad paper shall release easily from the pad without leaving any trace of adhesive on the underlying sheet.

3.5.2 Fiber pull. The sheets of pad paper, when adhered to a sheet of bond or xerographic dual purpose paper (Hammermill Fore DP, Long Grain, White #10326-7 or equal) shall not pull paper fibers from the bond paper when tested as specified in the following method. Place a sheet of bond or xerographic dual purpose paper (Hammermill Fore DP, Long Grain, White #10326-7 or equal) on a hard, flat surface. Randomly select two sheets. Separately place the two test sheets of the pad paper on the paper and adhere each by rolling once in their lengthwise direction (i.e., once back and once forth) using the roller described in ASTM D 3330. On one of the test sheets, write over the adhesive strip area with a sharp No. 2 pencil using enough pressure to indent the paper. Remove each test sheet from the bond paper. Evidence of paper fibers on the adhesive strip shall be considered as failure to meet the requirement.

3.5.3 Initial flagging. The sheets of pad paper, when adhered to a sheet of bond or xerographic dual purpose paper (Hammermill Fore DP, Long Grain, White #10326-7 or equal) shall remain attached to the bond paper when tested as specified in the following method. Adhere a sheet of the pad paper to the bond paper using the method described in 3.5.2. Hold the edges of the specimen so they do not lift off the paper before the timer is started. Roll the combined sample around a cylindrical object 5.1 cm (2 inches) in diameter with the horizontal edge of the sheet perpendicular to the axis of the cylinder. See Figure 1. Mark the points at which the specimen separates from the paper after thirty seconds have elapsed. The sheet of the pad paper shall not show a total flagging length in excess of 25% of the length of the horizontal edge, thirty seconds after the combined sample is mounted on the cylindrical object. Flagging is defined as the length, if any, of the adhesive end of the sheet which peels away from the bond paper due to stresses from being rolled up. Total flagging is the sum of flagging at both ends. See Table II.

3.5.4 Repositioned flagging. The sheets of pad paper, when repositioned shall remain attached when tested as specified in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

following method. A sheet of pad paper is positioned on a sheet of bond or xerographic dual purpose paper (Hammermill Fore DP, Long Grain, White, #10326-7 or equal) and adhered using the procedure described in 3.5.2. It is then removed and repositioned on a fresh section of the bond paper and adhered as above. This cycle is repeated 10 times. The sheet is then tested for 30 second flagging per 3.5.3 except that total flagging shall not exceed 60% of the length of the horizontal edge. See Table II.

Table II
Sheet Attachment; Initial and Repositioned

SHEET SIZE	TOTAL FLAGGING CM (IN), MAX. INITIAL	TOTAL FLAGGING CM (IN), MAX. REPOSITIONED
12.7 cm x 7.6 cm (5"X3")	3.2 cm (1.25")	7.6 cm (3.0")
7.6 cm x 7.6 cm (3"x3")	1.9 cm (0.75")	4.6 cm (1.8")
5.1 cm x 3.8 cm (2"X1.5")	1.3 cm (0.50")	3.0 cm (1.2")
5.1 cm x 7.6 cm (2"X3")	1.3 cm (0.50")	3.0 cm (1.2")
10.1 cm x 15.2 cm (4"x6")	2.5 cm (1.00")	6.1 cm (2.4")

3.5.5 Multiple lifts. The sheets of pad paper, when removed from the pad shall not exhibit multiple lifts when tested as specified in the following method. A pad is securely mounted to a flat, hard, horizontal surface using a double coated pressure sensitive adhesive tape. The tape covers the entire back side of the pad, the non-adhesive side of the pad faces up. A random number, between one and sixty, of sheets are removed from the top and discarded. The sheet remaining on top of the pad is removed by grasping betweeen the thumb and forefinger and lifting off the pad at a 90 degree angle. This procedure is repeated 25 times. Count the number of times more than one sheet is removed at a time (multiple lift). This shall not occur more than one time.

3.6. Workmanship. Sheets of pad paper shall be clean and free from dirt, foreign matter, holes, tears, wrinkles, and other defects which might affect appearance or serviceability. The sheets shall be uniform with respect to color and formation. Pads shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

square cut with smooth, clean edges.

4. Quality Assurance Provisions.

4.1 Inspection.

4.1.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.1.2 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this commercial item description where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirement.

Sampling for examination and tests shall be in accordance with Mil Std. 105, using the plans specified in Table III, unless stated otherwise. For the purposes of sampling, a lot shall consist of all pads of one size submitted for inspection at one time. Random samples shall be drawn from each lot for the end item inspection. Unless otherwise specified, every lot shall be tested. The sample unit shall be two pads. There shall be no failure to meet the requirements.

Table III

Examine	Inspection Level	AQL (% defect)/ Acceptance
Workmanship/General/ Performance/Dimensions	S-3	2.5
Style	S-4	2.5
Thickness/Basis Weight *	per Tappi	per Tappi

*Sampling and testing shall be according to Tappi.

5. Bleaching. To obtain an acceptable brightness, or color, in accordance with this document, a chemical bleaching process may be used. When specified in the ordering data (See Paragraph 8), the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

bleaching process shall not include the use of chlorine, chlorine dioxide, hypochlorite, or other chlorine containing compound. Certification of compliance shall be made available upon request by the Government.

6. Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be as specified in the contract or order.

7. Applicable Documents and Document Sources. The following documents form a part of this Commercial Item Description to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply:

7.1 Tappi Standards.

TAPPI standards are available from the Technical Association of the Pulp and Paper Industry, P.O. 8ox 105113, Atlanta, GA 30348.

7.2 Military Standards.

MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes

Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the U.S. Navy; Naval Publications and Form Center; 5801 Tabor Avenue; Philadelphia, PA 19120; or as directed by the contracting officer.

7.3 Executive Order 12873. Copies of the Executive Order 12873 dated Oct. 20, 1993, may be obtained free of charge from: The White House Publications Office, New Executive Office Building, White House, Washington, DC 20500, Att: Publications.
Phone (202)395-7332.

7.4 ASTM. ASTM standards are available from the American Society of Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103-1187.

8. Notes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

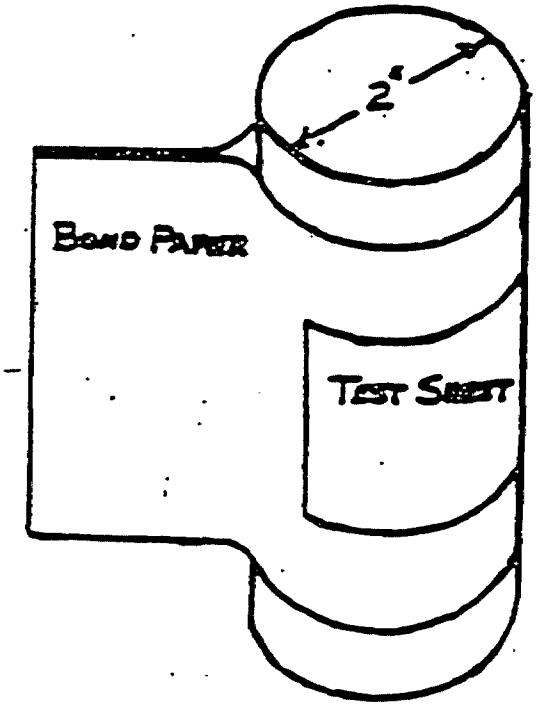


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

A. Ordering Data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

1. Packaging, packing, and marking.
2. Size
3. Dimensions
4. Color
5. Bleaching (see Paragraph 5)

B. Item Identifiers/Reference Part Number System (For Cataloging Use Only).

AA2546-1 :This example describes a repositionable writing paper
| :pad, Size 1.
|
└── Size 1 - 12.7x7.6 cm (5x3 inch)
Size 2 - 7.6 x7.6 cm (3x3 inch)
Size 3 - 5.1 x3.8 cm (2x1.5 inch)
Size 4 - 5.1 x7.6 cm (2x3 inch)
Size 5 - 10.1 x 15.2 cm (4x6 inch)

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

PREPARING ACTIVITY:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.