[INCH−POUND]
A−A−59832/3D
13 December 2022
SUPERSEDING
A−A−59832/3C
3 May 2021

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

EXTRACTOR, ELECTRICAL CARD, METAL, LOCKING, SINGLE ACTION, FOR "U" CHANNEL ACTUATING SURFACES, FOR .063, .094, AND .125 INCH THICK CIRCUIT CARD ASSEMBLIES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring extractors described herein shall consist of this document and the latest issue in effect of A−A−59832.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

AA59832	/03	*	*	1	*	*
CID number	Applicable CID sheet	Configuration (see table I)	Slot width (see table I)	Material	Finish	Color

Example: AA59832/03BE1LC is the PIN for a long length aluminum extractor designed for mounting on a circuit card assembly with a printed board thickness of .125 inch (3.20 mm) in width. The corrosion protection finish applied to the extractor is clear low resistance chemical film.

SALIENT CHARACTERISTICS.

Performance. Extractors shall be capable of injecting and removing the circuit card assembly from its installed position.

Interface and physical dimensions. The extractors supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A−A−59832.

Configuration. The configuration of a extractor shall be as specified in table I. The details of a particular configuration consist of those on figures 1 and 2.

Slot width. The available slot widths needed to accommodate various printed board thicknesses for the extractors covered by this CID specification sheet are specified in table I.

Material. The extractor body shall be aluminum alloy 6061, temper T6 as specified in A−A−59832. The material designator shall be a "1" as specified in A−A−59832.

Finish. The finish designator shall be as specified in A−A−59832. The finishes available for this CID specification sheet are as follows: "A" (anodize) or "L" (low resistance chemical film).

Color. The color designator shall be as specified in A−A−59832. The colors available for this CID specification sheet are as follows: "B" (black) or "R" (red) for anodize finishes and "C" (clear) or "G" (gold) for low resistance chemical film.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
FSC 5998


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

Roll pin. A stainless steel roll pin is furnished with each extractor. The roll pin is .09375 inch (2.38 mm) diameter by .25 inch (6.35 mm) long.

TABLE I. Configurations and dimensions. 1/

Configuration	Slot width designator	Slot width dimension "W" 2/ Inch (mm)	Accommodates printed board thickness Inch (mm)	Figure
B	S	.080 (2.03)	.063 (1.6)	1
B	T	.110 (2.79)	.094 (2.4)	
B	E	.140 (3.56)	.125 (3.2)	
C	S	.080 (2.03)	.063 (1.6)	2
C	T	.110 (2.79)	.094 (2.4)	
C	E	.140 (3.56)	.125 (3.2)	

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for general information only.
2/ Tolerance is +.010, −.000 inch (+0.25, −0.000 mm).

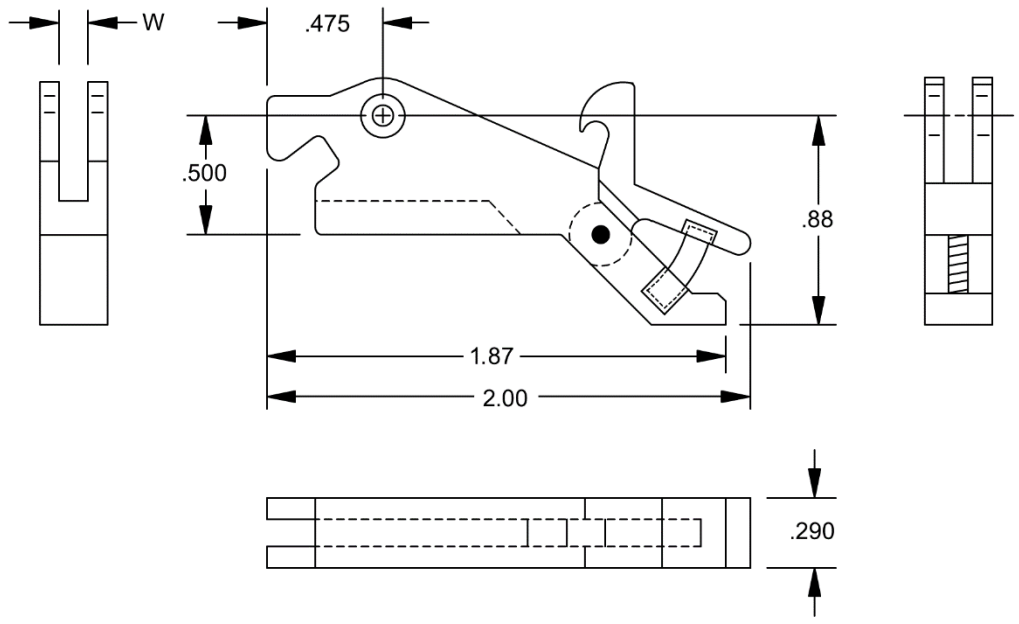


Inches	mm	Inches	mm	Inches	mm
.290	7.37	.500	12.7	1.87	47.49
.475	12.07	.88	22.35	2.00	50.8

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 1. Configuration B dimensions (approximate mechanical advantage of 4.2:1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

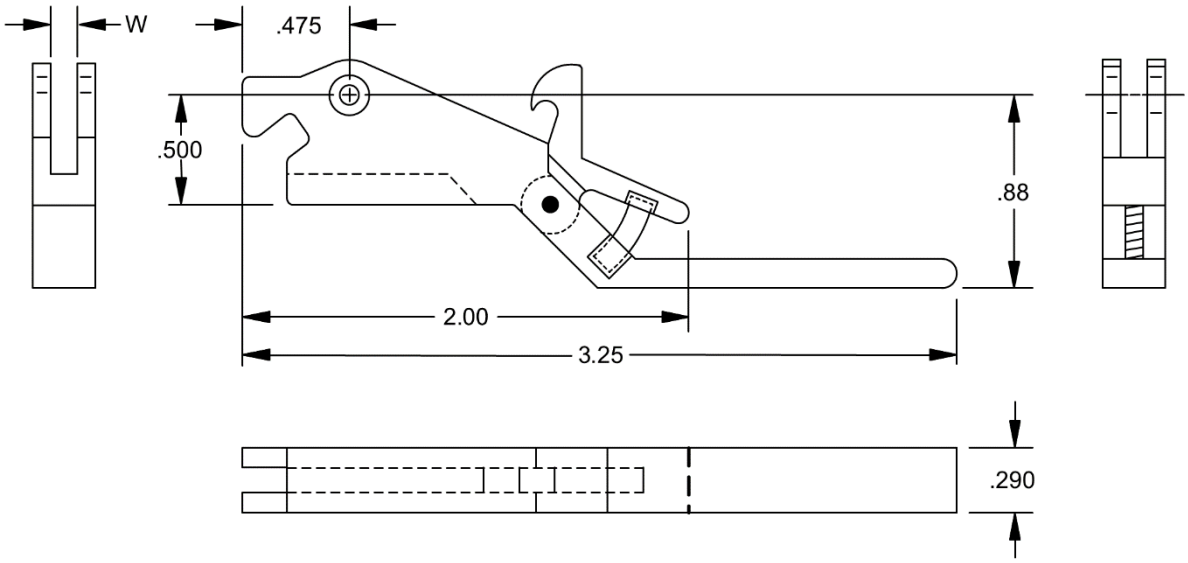

Inches	mm	Inches	mm	Inches	mm
.290	7.37	.500	12.7	2.00	50.8
.475	12.07	.88	22.35	3.25	82.55


NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 2. Configuration C dimensions (approximate mechanical advantage of 7:1).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

APPLICATION DATA.

Card cage actuating surface. The nominal position of circuit card assembly edge to the "U" channel edge when seated in the connector is shown on figure 3. The extractor will allow .05 inch (1.3 mm) over travel for tolerance take-up. The circuit card assembly is ejected from its installed position by lever action of the ejector against the "U" channel of the card cage. A single ejector is recommended for circuit card assemblies up to 5 inches (127 mm) in width. For circuit card assemblies over 5 inches (127 mm) in width, or when using an electrical connector with more than 100 contacts, two ejectors mounted on each circuit card assembly is recommended.

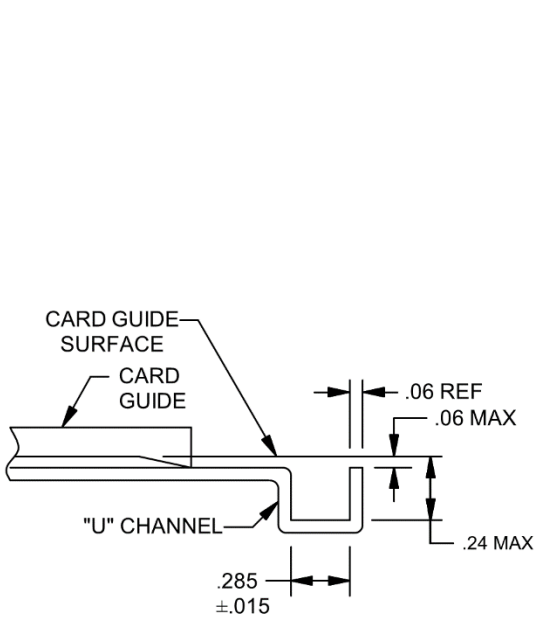

ACTUATING SURFACE DETAIL

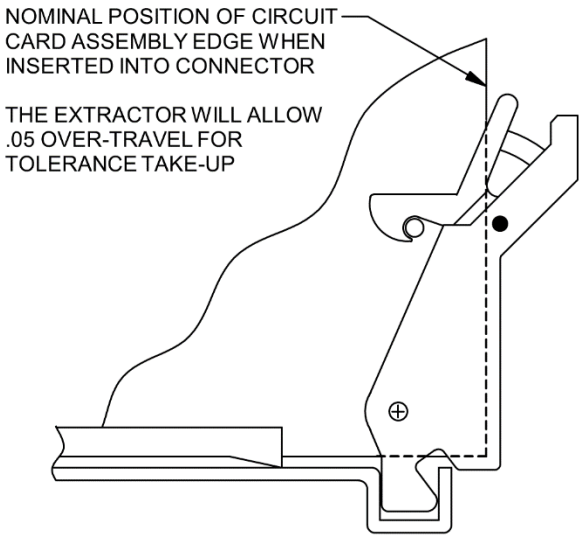

CIRCUIT CARD ASSEMBLY ENGAGED INTO CONNECTOR


Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.015	0.38	.06	1.5	.24	6.1	.285	7.24	.73	18.5
.05	1.3	.109	2.77	.250	6.35	.36	9.1		

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 3. Circuit card assembly printed board mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

Circuit card assembly printed board. The circuit card assembly should be designed so that electronic components in the area around the ejector mounting hole have sufficient clearance for ejector rotation as shown on figure 4.

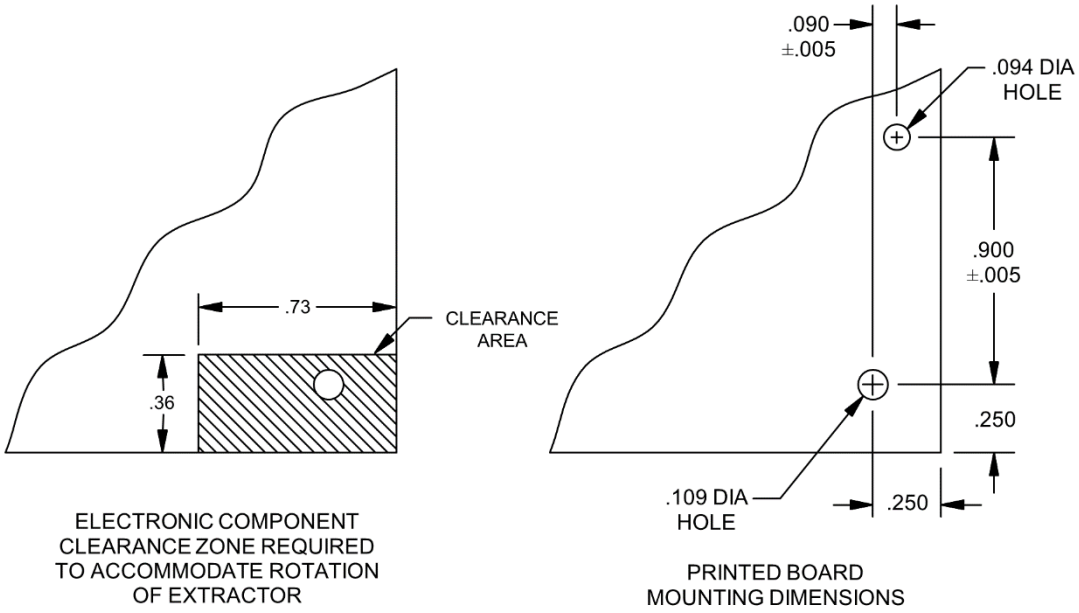

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.094	2.39	.250	6.35	.73	18.5
.090	2.29	.109	2.77	.36	9.14	.900	22.86

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 4. Printed board electronic component clearance zone and mounting hole dimensions.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A−A−59832 − Extractor, Electrical Card, Metal, General Requirements For

(Copies of these documents are available online at https://quicksearch.dla.mil.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

Ordering data. Ordering data is as specified in A−A−59832.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
5BG68	American Circuit Card Retainers, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806−1231	Telephone: (714) 738−6194 Facsimile: (714) 446−0119 E-mail: sales@accrmfg.com URL: www.accrmfg.com
61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121−3410	Telephone: (858) 740−2400 Facsimile: (858) 740−2430 E-mail: askschroff@nVent.com URL: https://schroff.nvent.com

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturer's P/Ns as shown in table II. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. Commercial P/N supersession data.

PIN designator AA59832/03	Vendor similar designator or type part number 1/ CAGE 5BG68	Vendor similar designator or type part number 1/ CAGE 61081
BS1AB	1773−2BA	107−73
BT1AB	1773−3BA	107−73−3
BE1AB	1773−4BA	107−73−4
BS1AR	1773−2RA	
BT1AR	1773−3RA	
BE1AR	1773−4RA	
BS1LC	1773−2CC	C107−73
BT1LC	1773−3CC	C107−73−3
BE1LC	1773−4CC	C107−73−4
BS1LG	1773−2CG	
BT1LG	1773−3CG	
BE1LG	1773−4CG	

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.

TABLE II. Commercial P/N supersession data.

PIN designator AA59832/03	Vendor similar designator or type part number 1/ CAGE 5BG68	Vendor similar designator or type part number 1/ CAGE 61081
CS1AB	1775−2BA	107−75
CT1AB	1775−3BA	107−75−3
CE1AB	1775−4BA	107−75−4
CS1AR	1775−2RA	
CT1AR	1775−3RA	
CE1AR	1775−4RA	
CS1LC	1775−2CC	C107−75
CT1LC	1775−3CC	C107−75−3
CE1LC	1775−4CC	C107−75−4
CS1LG	1775−2CG	
CT1LG	1775−3CG	
CE1LG	1775−4CG	

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A−A−59832.

Changes from previous issue. The margins of this CID specification are marked with bars to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Army − CR
Navy − EC
Air Force − 85
DLA − CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA − FAS

Preparing Activity:
DLA − CC

Project: 5998−2023−003

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:28Z
Check the source to verify that this is the current version before use.