NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-19207/10C
10 May 1974
SUPERSEDING
MIL-F-19207/10B
31 August 1966

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, NONINDICATING,

TYPES FHL19G AND FHL19W

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fuseholders described herein shall consist of this document and the latest issue of Specification MIL-F-19207.

INACTIVE FOR NEW DESIGN

Ⓒ (For replacement purposes only)

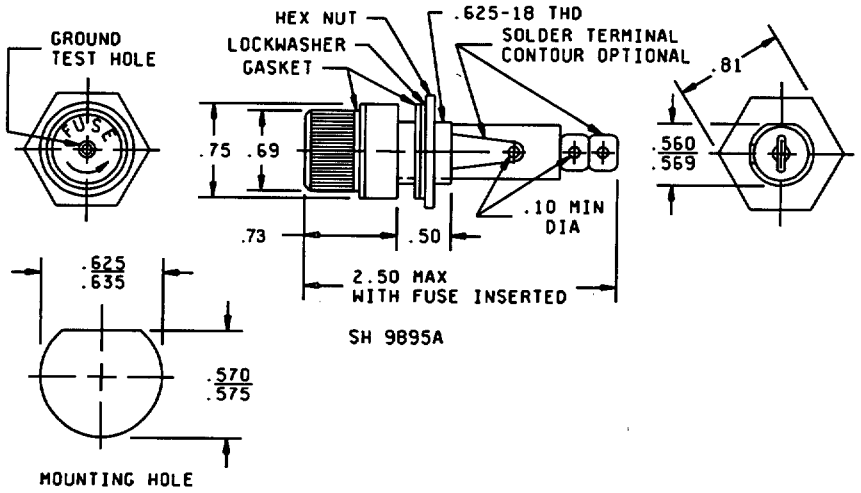


Figure 1 - Type FHN19G

Inches	MM	Inches	MM	Inches	MM	
.10	2.54	.570	14.48	.73	18.54	Ⓒ
.50	12.70	.575	14.61	.75	19.05	
.560	14.22	.625	15.88	.81	20.57	
.569	14.45	.635	16.13	2.50	63.50	Ⓒ
		.69	17.53			

Ⓒ Denotes changes.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:28Z
Check the source to verify that this is the current version before use.

INACTIVE FOR NEW DESIGN

(C) (For replacement purposes only)

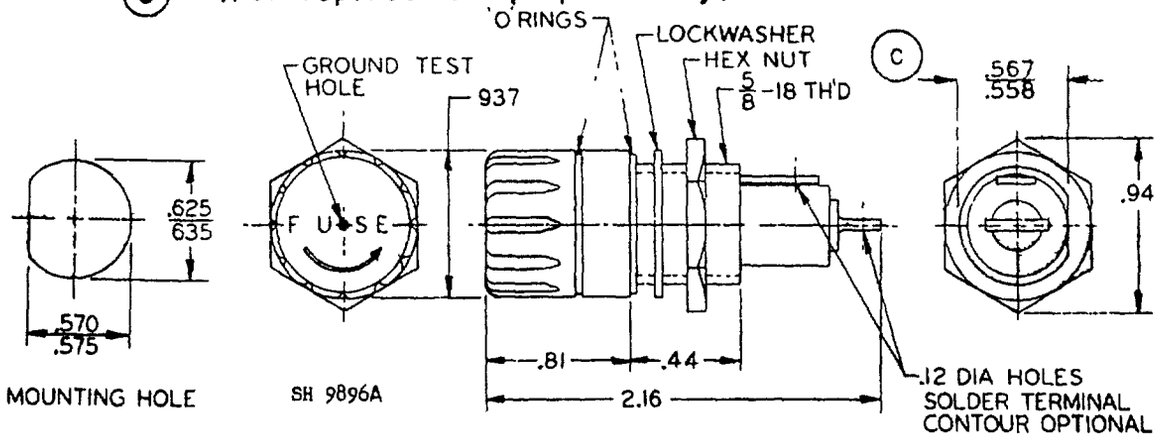


Figure 2 - Type FHN19W.

Inches	MM	Inches	MM	Inches	MM
.12	3.05	.570	14.48	.81	20.57
.44	11.18	.575	14.61	.936	23.80
.558	14.17	.625	15.88	.94	23.88
.567	14.40	.635	16.13	2.16	54.86

NOTES:

(1) Dimensions are in inches.
(2) Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
(3) Unless otherwise specified, tolerances are .XX ± .02 and .XXX ± .005.

REQUIREMENTS:

(C) Dimensions and configuration: See figures 1 and 2.
Body and cap molding material: GDI-30F or SDG-F of MIL-M-14.
Fuse accommodation:
Ferrule type:
Size: 0.281 inch diameter, 1.250 inch length.
Style: MIL-F-15160, F05 and F06.
Poles: One.
Rating: 15 amperes, 250 volts maximum.
Panel thickness: 0.187 inch maximum
Gaskets and O-rings: ZZ-R-765.
Nonindicating:
Lamp series resistor: None.
Terminals: Solder lug type.
Enclosure:
FHN19G - Dripproof.
FHN19W - Watertight.
Test fuses:
Temperature rise: F06A250V15A of MIL-F-15160/06.
(C) Short circuit: F06A250V15A of MIL-F-15160/06. Short circuit test shall be made at 10,000 amperes, 125 volts, 60 Hz and 200 amperes 250 volts, 60 Hz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:28Z
Check the source to verify that this is the current version before use.

Mechanical shock: Method II of MIL-F-19207.
Terminal strength: 5 pounds.
Torque: Mounting - 30 pounds-inch.
Cap insert (FHN19W only) - 15 pounds-inch.
Salt spray (corrosion): Test condition B.

Custodians:
Army - EL
Navy - SH
Air Force - 85
Review activities:
Army - EL, MI, CE
Navy - SH, AS, EC
Air Force - 11, 17, 85
DSA - ES
User activities:
Army -
Navy - MC
Air Force - 14, 19

Preparing activity:
Navy - SH
(Project 5920-0311-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:28Z
Check the source to verify that this is the current version before use.