NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-19207/12C
15 May 1986
SUPERSEDING
MIL-F-19207/12B
31 August 1966

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL22WB

© This specification is approved for use by all Departments and Agencies of the Department of Defense.

© The complete requirements for procuring the fuseholders described herein shall consist of this specification and the latest issue of MIL-F-19207.


© denotes changes.

AMSC

FSC 5920

© DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:28Z
Check the source to verify that this is the current version before use.

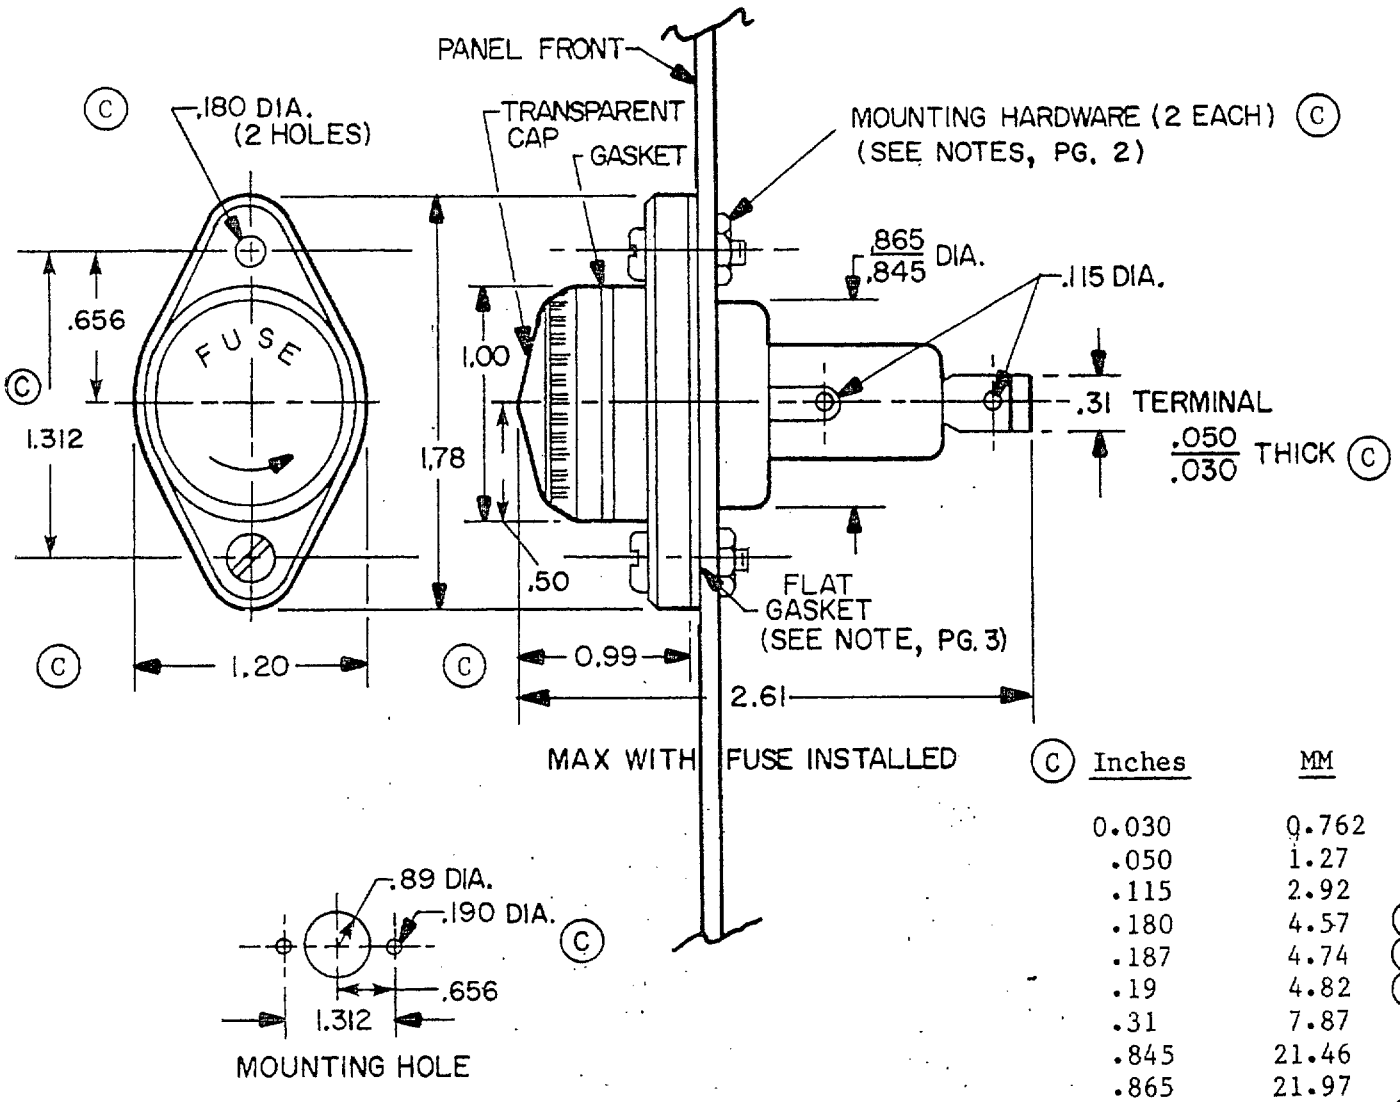

Inches	MM	
0.030	0.762	
.050	1.27	
.115	2.92	
.180	4.57	C
.187	4.74	C
.19	4.82	C
.31	7.87	
.845	21.46	
.865	21.97	
.89	22.60	C
.99	25.15	
1.00	25.40	C
1.20	30.48	
1.312	33.32	
1.78	45.21	
2.61	66.29	

SH 1319916

NOTES:

1. All dimensions are in inches.
2. Metric equivalents (to nearest 0.01 mm) are given for general information only.
3. Unless otherwise specified, tolerances are plus or minus 0.02 (0.51 mm) for two-place decimals and plus or minus 0.005 (0.13 mm) for three-place decimals.

C

FIGURE 1. Type FHL22WB fuseholder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

(C) Body molding material: GDI-30F, or SDG-F of MIL-M-14.

Fuse accommodation:

Ferrule type:

Size: 0.406 inch diameter, 1.500 inch length.

Style: MIL-F-15160, F10.

Poles: One.

(C) Rating: 15 amperes, 250 volts maximum.
30 amperes, 125 volts maximum.

(C) Panel thickness: 0.187 inch maximum.

Indicating: Fuseholder shall be so designed that fuse red button pop-up is clearly visible through the transparent cap, when the fuse has blown, under 22 to 28 foot-candles of light.

Lamp series resistor: None.

Terminals: Solder lug type.

(C) Enclosure: Watertight and body sealed.

Test fuses:

(C) Temperature rise: F10A125V30A of MIL-F-15160/10.

(C) Short circuit: F10A250V15A of MIL-F-15160/10.
F10A125V30A of MIL-F-15160.

Mechanical shock: Method II of MIL-F-19207.

Terminal strength: 5 pounds.

Torque: Cap insert - 15 pounds-inch.

Salt spray (corrosion): Test condition B.

(C) Endurance: 300 operations.

(C) Mounting hardware:

(C) Screw: Self sealing panhead, slotted, stainless steel 8-32NC-2A, 5/8 inch long

Nut: Hexagonal, 1/8 inch thick stainless steel

(C) NOTE: Mounting hardware and gasket supplied loose in plastic bag.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - ER, MI, CE, ES
Navy - AS
Air Force - 11, 17, 99

User activities:
Navy - MC
Air Force - 14, 19

Preparing activity:
Navy - SH
(Project 5920-0423-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:28Z
Check the source to verify that this is the current version before use.