INCH POUND
MIL-PRF-19207/12D
17 April 1998
SUPERSEDING
MIL-PRF-19207/12C
15 May 1986

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL22W

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fuseholders described herein shall consist of this specification and the latest issue of MIL-PRF-19207.

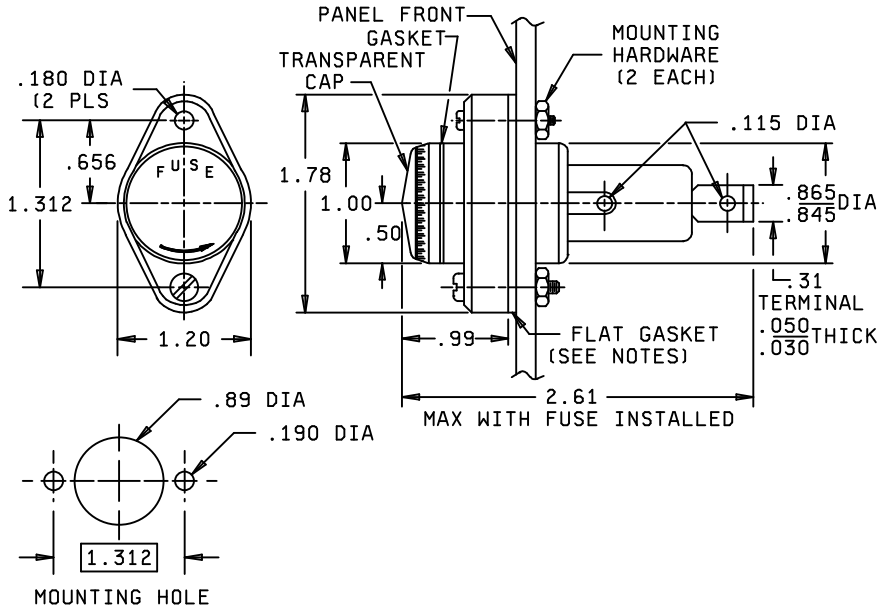

Inches	mm
0.030	0.762
0.050	1.27
0.115	2.92
0.180	4.57
0.187	4.74
0.19	4.82
0.31	7.87
0.845	21.46
0.865	21.97
0.89	22.60
0.90	25.15
1.00	25.40
1.20	30.48
1.312	33.32
1.78	45.21
2.61	66.29

NOTES:
1. All dimensions are in inches.
2. Metric equivalents (to nearest 0.01 mm) are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.5 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
4. Mounting hardware and gasket supplied loose in plastic bag.
5. The shape of the above fuseholder and knob marking are shown for information only. Slight deviations from this outline drawing and/or the knob marking, which do not alter the functional aspect of the device, are acceptable.

FIGURE 1. Type FHL22W fuseholder.

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Body molding material: It is recommended that type GDI-30F or SDG-F of MIL-M-14 be considered for meeting the body material requirements of this specification.

Fuse accommodations:

Ferrule type:

Size: 0.406 inch diameter, 1.500 inch length.
Style: MIL-PRF-15160, F10.

Poles: One.

Rating: 15 amperes, 250 volts maximum.
30 amperes, 125 volts maximum.

Panel thickness: 0.187 inch maximum.

Indicating: Fuseholder shall be such that the fuse red button pop-up is clearly visible through the transparent cap, when the fuse has blown, under 22 to 28 foot-candles of light.

Lamp series resistor: None.

Terminals: Solder lug type.

Enclosure: Watertight.

Test fuses:

Temperature rise: F10A125V30A of MIl-PRF-15160/10.

Short circuit: F10A250V15A of MIL-PRF-15160/10.
F10A125V30A of MIL-PRF-15160/10.

Mechanical shock: Method II of MIL-PRF-19207.

Terminal strength: 5 pounds.

Torque: Cap insert - 15 inch-pounds.

Salt spray (corrosion): Test condition B.

Endurance: 300 operations.

Mounting hardware:

Screw: Self sealing panhead, slotted, stainless steel 8-32NC-2A, 5/8 inch long.

Nut: Hexagonal, 1/8 inch thick stainless steel.

Supersession data: FHL22WB has been superseded by FHL22W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:28Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Army - CE, MI
Navy - AS, MC
Air Force - 11, 17, 19, 99

Preparing activity:
DLA - CC

(Project 5920-0525)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:28Z
Check the source to verify that this is the current version before use.