NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-19207/13D
15 May 1986
SUPERSEDING
MIL-F-19207/13C
13 September 1968

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, NONINDICATING, TYPE FHN23WB

Ⓓ This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓓ The complete requirements for procuring the fuseholders described herein shall consist of this specification and the latest issue of MIL-F-19207.


Ⓓ denotes changes.


AMSC N/A

FSC 5920

Ⓓ DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:29Z
Check the source to verify that this is the current version before use.

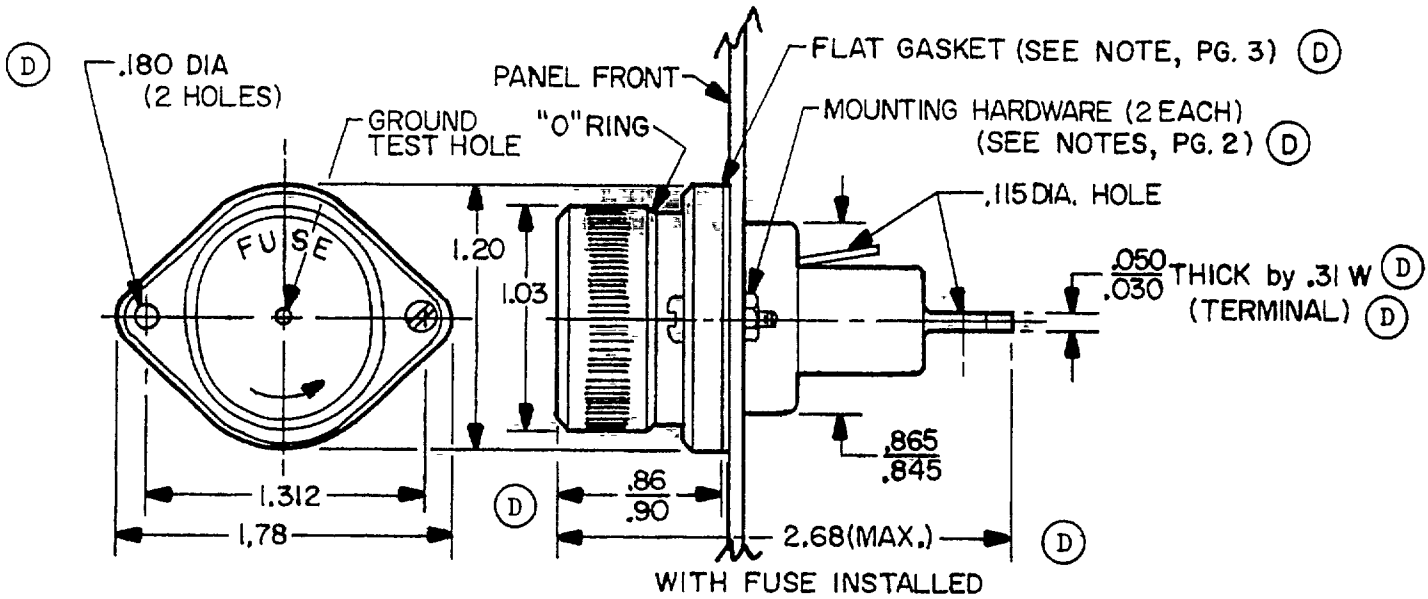

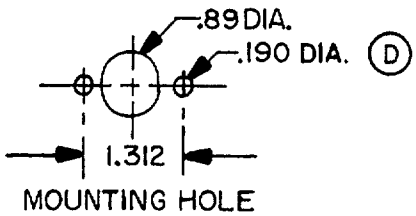

Inches	MM	Inches	MM
0.030	0.762	0.865	21.97
.050	1.27	.89	22.61
.115	2.92	.90	22.86 (D)
.180	4.57	1.03	26.16
.187	4.74	1.20	30.48 (D)
.19	4.83	1.312	33.32 (D)
.31	7.87	1.78	45.21
.845	21.46	2.68	68.07
.86	21.84 (D)		

SH 1319917

NOTES:

1. All dimensions are in inches.
2. Metric equivalents (to nearest 0.01 mm) are given for general information only.
3. Unless otherwise specified, tolerances are plus or minus 0.02 (0.51 mm) for two-place decimals and plus or minus 0.005 (0.13 mm) for three-place decimals.

(D)

FIGURE 1. Type FHN23WB fuseholder.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T12:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
(D) Cap and body molding material: GDI-30F or SDG-F of MIL-M-14.
Fuse accommodation:
  Ferrule type:
    Size: 0.406 inch diameter, 1.500 inch length.
(D) Style: MIL-F-15160, F09, and F60.
Poles: One.
(D) Rating: 30 amperes, 500 volts maximum.
Panel thickness: 0.187 inch maximum.
Nonindicating
Lamp series resistor: None.
Terminals: Solder lug type.
(D) Enclosure: Watertight and body sealed.
Test fuses:
    Temperature rise: F09A250V30A of MIL-F-15160/09.
(D) Short circuit: F60C500V3CA of MIL-F-15160/60.
Mechanical shock: Method II of MIL-F-19207.
Terminal strength: 5 pounds.
Torque: Cap insert - 15 pounds inch.
Salt spray (corrosion): Test condition B.
Endurance: 300 operations.
(D) Mounting hardware:
(D) Screw: Self sealing panhead, slotted, stainless steel 8-32NC-2A, 5/8 inch long
(D) Nut: Hexagonal, 1/8 inch thick stainless steel

(D) NOTE: Mounting hardware and gasket supplied loose in plastic bag.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - EA, MI, ME, ES
Navy - AS
Air Force - 99, 17

User activities:
Navy - MC
Air Force - 19

Preparing activity:
Navy - SH
(Project 5920-0423-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:29Z
Check the source to verify that this is the current version before use.