NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-19207/16E
23 August 1991
SUPERSEDING
MIL-F-19207/16D
8 August 1977

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
NONINDICATING, TYPES FHN26G1, FHN26G2, AND FHN26W

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirement for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

(E)

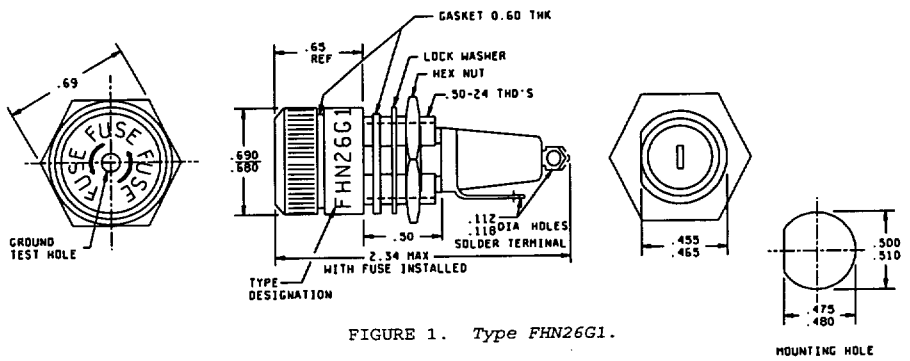


FIGURE 1. *Type FHN26G1.*

INCHES	MM
0.060	1.52
0.112	2.84
.118	3.00
.455	11.56
.465	11.81
.468	11.89
.478	12.14
0.500	12.70
.510	12.95
.65	16.51
.680	17.27
.690	17.53
2.34	59.44

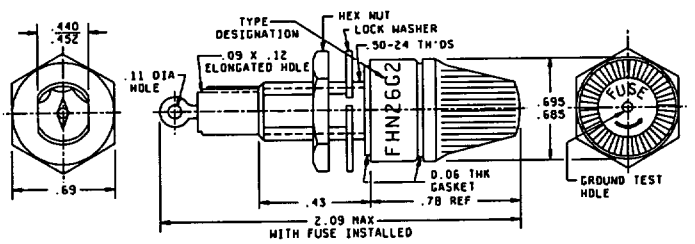


FIGURE 2. *Type FHN26G2.*

INCHES	MM	INCHES	MM
0.60	1.52	.680	17.27
.11	2.79	.69	17.53
.12	3.10	.695	17.65
.440	11.18	.78	19.81
.500	12.70	2.09	53.09


See notes on other page.

(E) denotes changes.

FSC 5920

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:29Z
Check the source to verify that this is the current version before use.

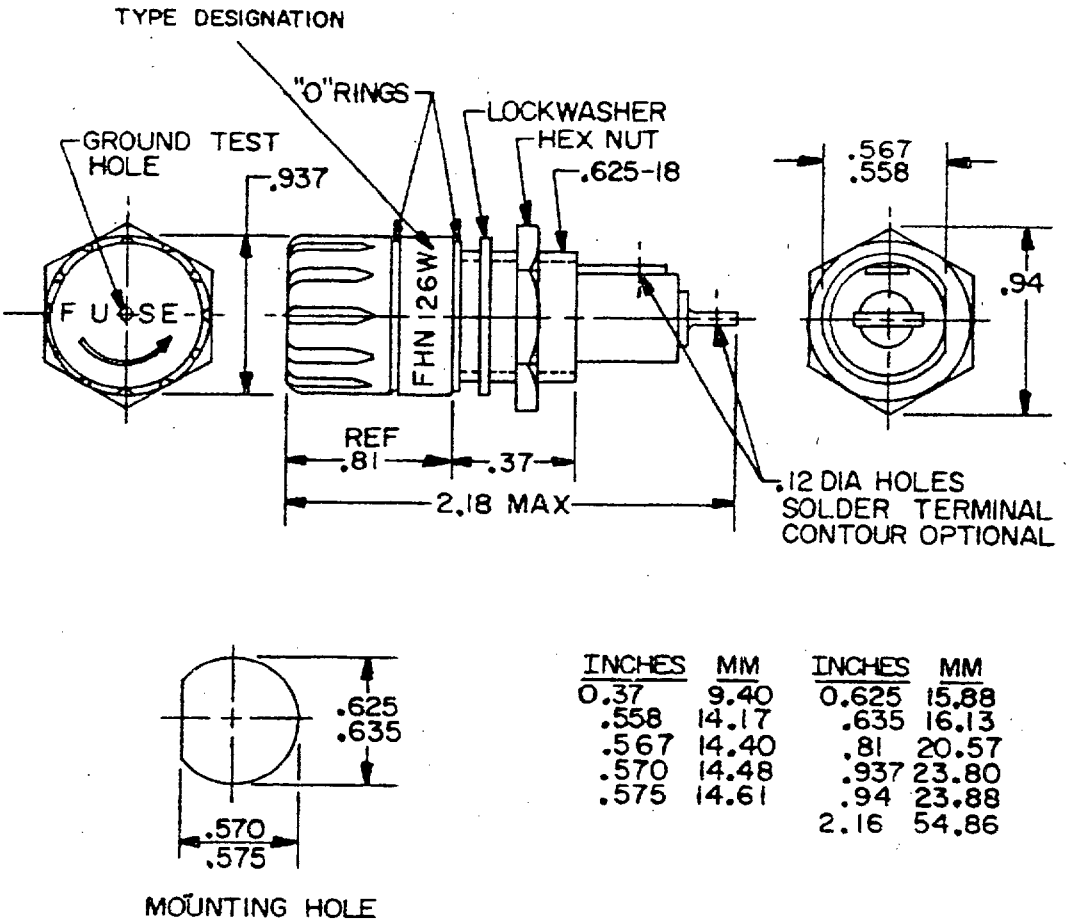

(E)

INCHES	MM	INCHES	MM
0.37	9.40	0.625	15.88
.558	14.17	.635	16.13
.567	14.40	.81	20.57
.570	14.48	.937	23.80
.575	14.61	.94	23.88
		2.16	54.86

FIGURE 3. *Type FHN26W.*

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances for two place decimals shall be .XX ± .02 (0.5) and for three place decimals .XXX ± 005 (0.13).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1, 2, and 3
Cap and body molding material: GDI-30F or SDG-F of MIL-M-14
Gaskets and O-rings: ZZ-R-765
Fuse accommodation:
  Ferrule type:
    Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length
    Style: MIL-F-15160, F02 and F03 and MIL-F-23419, FM09
Poles: One
Rating: 30 amperes, 250 volts maximum
Panel thickness: 0.187 inch (4.76 mm) maximum
Nonindicating:
Lamp series resistor: None
Terminals: Solder lug type
Enclosure:
  FHN26G1 and FHN26G2 – Dripproof
  FHN26W – Watertight
Test fuses:
  Temperature rise: F03A125V30A of MIL-F-15160/3
  Short circuit: F03A250V15A of MIL-F-15160/3
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 5 pounds
Torque: Mounting – 20 pounds-inch for FHN26G1 and FHN26G2; 30 pounds-inch for FHN26W
Salt spray (corrosion): Test condition B
Military part number: M19207/26 (dash number from table I)

TABLE I.

Military part number	Fuse holder
–001	FHN26G1
–002	FHN26G2
–003	FHN26W

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:29Z
Check the source to verify that this is the current version before use.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:29Z
Check the source to verify that this is the current version before use.