NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-19207/17E
23 August 1991
SUPERSEDING
MIL-F-19207/17D
29 July 1969


PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
NONINDICATING, TYPES FHN28W AND FHN28WB

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirement for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

(E)

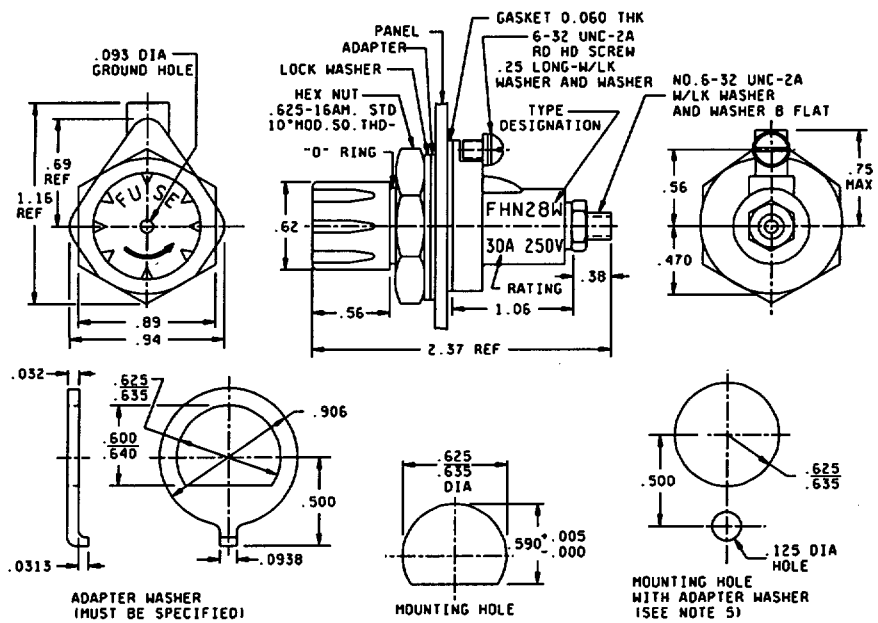

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
0.005	0.13	.38	9.65	.600	15.24	.75	19.05	.69	17.53
.031	0.79	.47	11.94	.610	15.49	.88	22.35	.906	23.01
.032	.81	.500	12.70	.62	15.75	.94	23.88	1.06	26.92
.093	2.36	.56	14.22	.625	15.88	2.37	60.20	1.16	29.46
.094	2.39	0.590	14.99	.635	16.13	.625	15.88		

FIGURE 1. Type FHN28W and Type FHN28WB fuseholder

See notes on next page.

(E) denotes changes.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:29Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are: .XX ± .02, .XXX ± 005.
4. Cap thread shall be 3/8-32NEF2 and provide for cap interchangeability.
5. Round hole mounting for replacements only. Use adapter washer for nonwatertight applications only.

REQUIREMENTS:

(E) Dimensions and configuration: See figure 1
Cap and body molding material: MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation:
  Ferrule type:
    Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length
    Styles: MIL-F-15160, F02 and F03 and MIL-F-23419, FM03 and FM09
(E) Poles: One
Rating: 30 amperes, 250 volts maximum
Panel thickness: 0.125 inch (3.18 mm) maximum
Nonindicating:
Lamp series resistor: None
(E) Terminals: Stud and screw type
Enclosure: Watertight or watertight and body sealed
Weight: 1.06 ounces maximum
Test fuses:
  Temperature rise: F03A125V30A of MIL-F-15160/03
  Voltage drop: F03A125V30A of MIL-F-15160/03
  Short circuit: F03A250V15A of MIL-F-15160/3
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 20 pounds
Torque: Terminals – 12 pounds-inch. Cap metal inserts – 36 pounds-inch
  Mounting – 30 pounds-inch
Salt spray (corrosion): Test condition B
Dielectric: Sea level – 1,500 volts
  Reduced pressure – 625 volts
Military part number: M19207/17 (dash number from table I)

TABLE I.

Military part number	Fuse holder
–001	FHN28W
–002	FHN28WB

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:29Z
Check the source to verify that this is the current version before use.

(E) NOTE: For submarine applications, order style FHN28WB.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:29Z
Check the source to verify that this is the current version before use.