NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-19207/18G
23 August 1991
SUPERSEDING
MIL-F-19207/18F
4 August 1987

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
BLOWN FUSE INDICATING, TYPE FHL29G

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirement for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

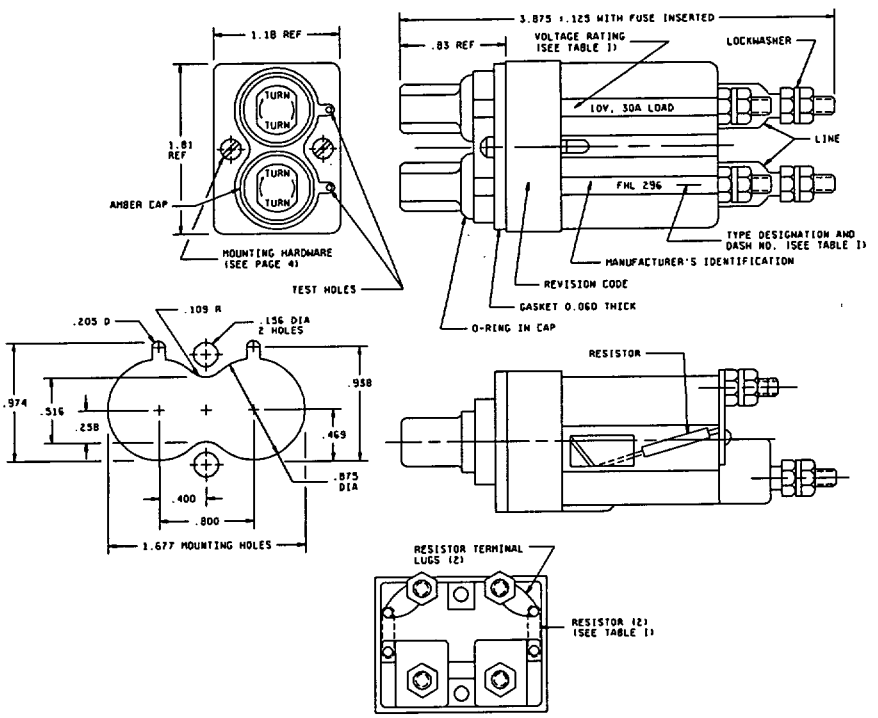

Inches	MM	Inches	MM	Inches	MM	Inches	MM
0.060	1.52	.258	6.55	.875	22.23	1.810	45.97
.109	2.77	0.400	10.16	.938	23.83	3.875	98.43
.125	3.18	.469	11.91	.974	24.74		
.156	3.96	.516	13.11	1.180	29.97		
.205	5.21	.800	20.32	1.677	42.60		

See notes on other page.


FIGURE 1. *Type FHN29G fuseholder.*

G denotes changes.

FSC 5920

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:30Z
Check the source to verify that this is the current version before use.

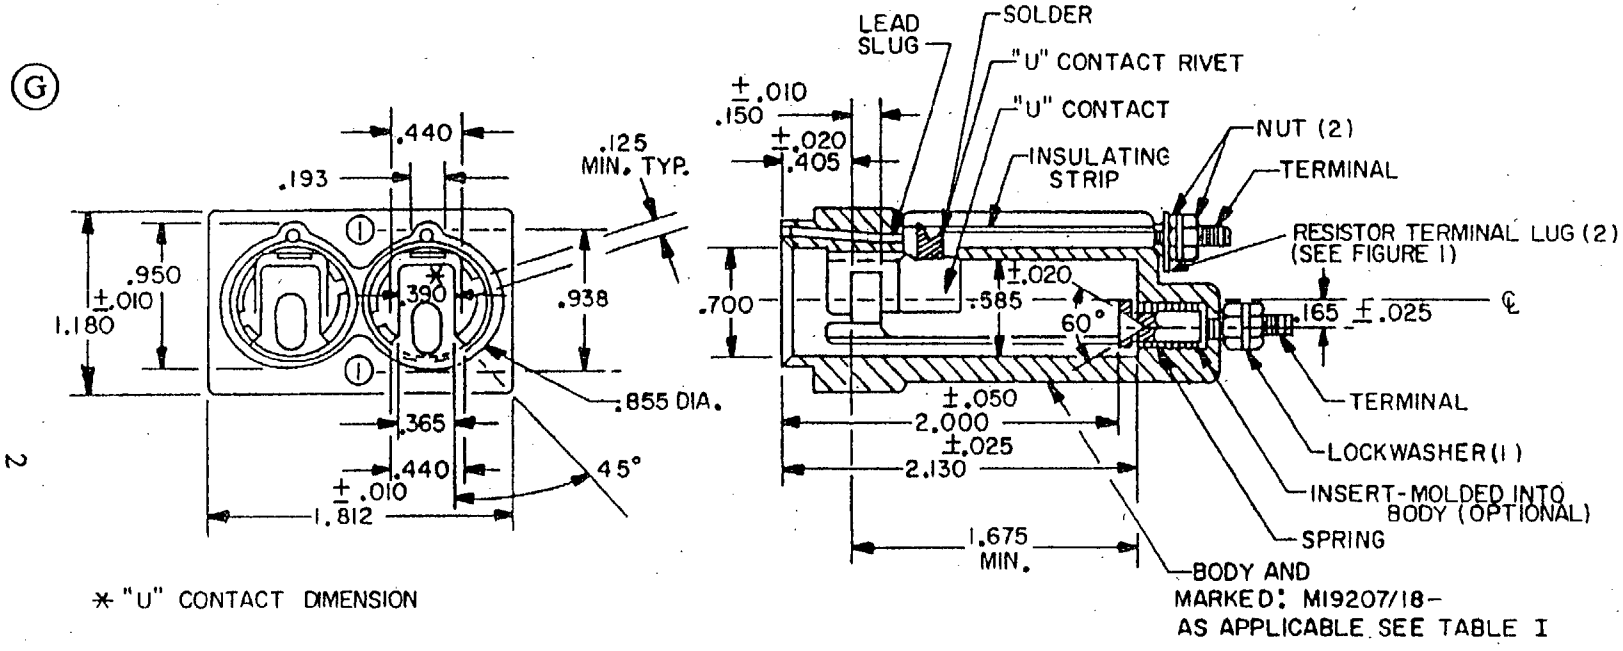


Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
.010	0.25	.150	3.81	.405	10.29	.938	23.83	2.000	50.80
.020	0.51	.165	4.19	.440	11.18	.950	24.13	2.130	54.10
.025	0.64	.193	4.90	.585	14.86	1.180	29.97		
0.50	1.27	.365	9.27	.700	17.78	1.675	42.55		
.125	3.18	.390	9.91	.855	21.72	1.812	46.02		

See notes on other page.

FIGURE 2. *Body for FHL29G fuseholder.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

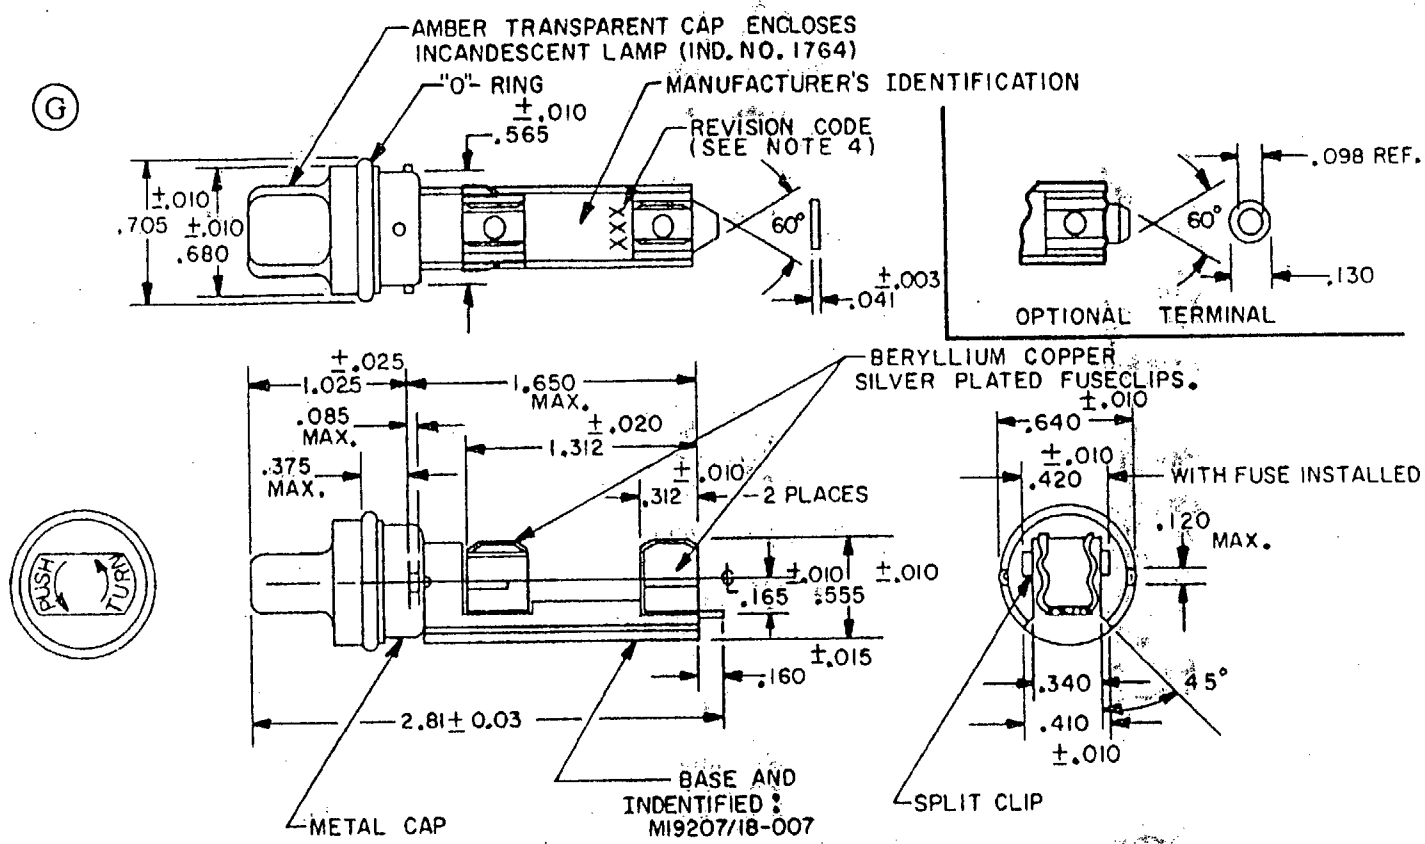

MI9207/18-007 - FUSE CARRIER FOR FHL 29G AND FHL 30G

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
.003	0.08	.031	0.79	.130	3.30	.375	9.53	.640	16.26	1.650	41.91
.010	0.25	.041	1.04	.160	4.06	.410	10.41	.680	17.27	2.813	71.45
.015	0.38	.085	2.16	.165	4.19	.420	10.67	.705	17.91		
.020	0.51	.098	2.49	.312	7.92	.555	14.10	1.025	26.04		
.025	0.64	.120	3.05	.340	8.64	.565	14.35	1.312	33.32		

See notes on other page.

FIGURE 3. *Fuse carrier for FHL29G and FHL30G fuseholders.*

Source: https://assist.dla.mil -- Downloaded: 2026-01-18T12:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Metric equivalents are for general information only, based upon 1 inch = 25.4 mm.
2. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.
3. Revision code shall be G.
4. All of the type FHL29G fuseholders submitted for delivery shall have been subjected to the dripproof test in accordance with 4.16.2.
5. Mounting hardware:
   Screw: 6-32UNC-2A, 7/8-inch long (min)
   (G) Pan/round head with sealing washer or pan self sealing
   Nut: 6-32 UNC-2B square. A threaded metal insert may be used in lieu of nut.

REQUIREMENTS:

(G) Dimensions and configuration: See figures 1, 2, and 3
Body and carrier material: MAI-60 or GDI-30F in accordance with MIL-M-14
Fuse accommodation, Ferrule type:
Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length
Styles: F02 and F03 in accordance with MIL-F-15160, and FM09 in accordance with MIL-F-23419
Poles: Two
Rating: 30 amperes (see table I for voltage ratings)

TABLE I. *Fuseholder marking.*

Fuseholder marking					Resistance (ohms)	Resistance specification	Style[1]
Body part No.	Revision code	Type number	Dash number	Voltage			
M19207/18-001	note 4	FHL29G	– 1	12–22	Shorting wire in place of resistor		
M19207/18-002	note 4	FHL29G	– 2	23–33	330	MIL-R-39008/2	– RCR20
M19207/18-003	note 4	FHL29G	– 3	34–45	681	MIL-R-39007/8	– RWR80
M19207/18-004	note 4	FHL29G	– 4	46–60	1,210	MIL-R-39007/8	– RWR80
M19207/18-005	note 4	FHL29G	– 5	61–80	1,870	MIL-R-39007/11	– RWR89
M19207/18-006	note 4	FHL29G	– 6	81–90	2,050	MIL-R-39007/11	– RWR89

[1] MIL-R-39017 type RLR resistors can be used in lieu of RCR types.

Panel thickness: 0.125 inch (3.18 mm) maximum
Indicating: Incandescent lamp, No. 1764, with Amber clear cap
Lamp series resistor: See table I
Terminals: Threaded stud type, No. 8-32UNC-2A. Brass, silver, or tin plate
Enclosure: Dripproof. See note 5.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:30Z
Check the source to verify that this is the current version before use.

Test fuses:
Temperature rise: F03A125V30A in accordance with MIL-F-15160/3
Short circuit: F03A125V30A in accordance with MIL-F-15160/3
Mechanical shock: Method I in accordance with MIL-F-19207
Terminal strength: 20 pounds
Torque: Terminals – 15 pounds-inch
Salt spray (corrosion): Test condition B

Patent notice: The US Government has royalty-free license only under claims 3 through 6, 11, and 12 of US Patent 2,854,549 owned by McGraw Electric Company for the benefit of manufacturers of the items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.