
INCH-POUND
MIL-F-19207/19H
23 August 1991
SUPERSEDING
MIL-F-19207/19G
4 August 1987

MILITARY SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL30G

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

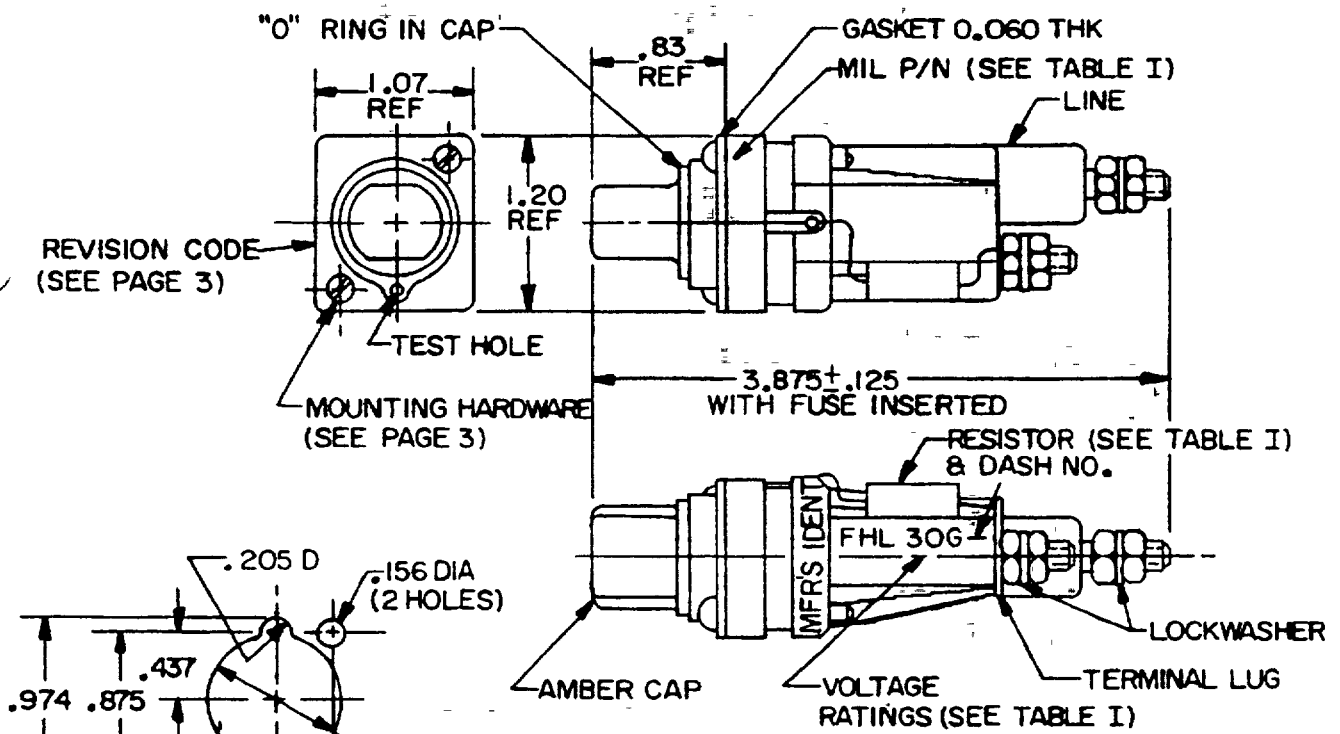


INCHES	MM	INCHES	MM
0.005	0.13	.750	19.05
0.060	1.52	.83	21.08
.125	3.18	.875	22.23
.156	3.96	.974	24.74
.205	5.21	1.070	27.18
.375	9.53	1.200	30.48
.437	11.10	3.875	98.43

See notes on other page

FIGURE 1. *Type FHL30G fuseholder.*

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

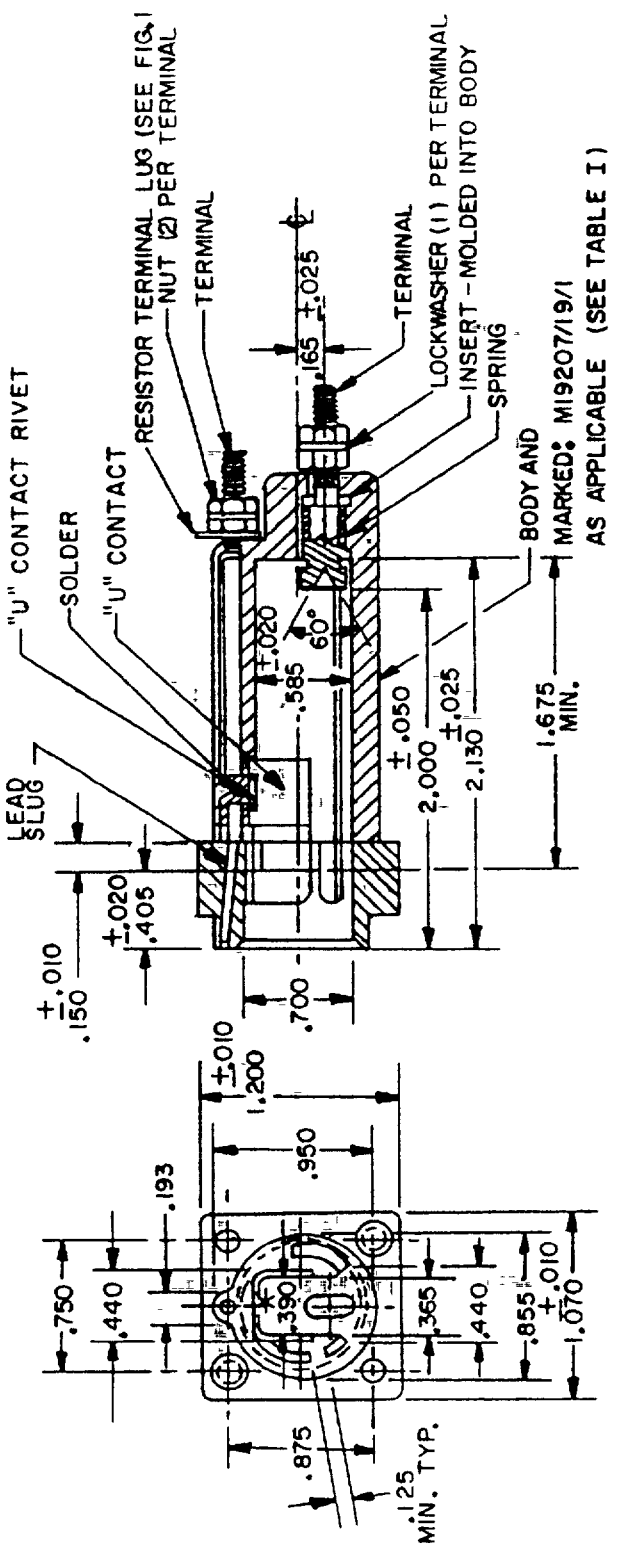

* "U" CONTACT DIMENSION

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
010	0 25	150	3 81	440	11 18	875	22.23	2 000	50.80
020	0.51	165	4 19	583	14 86	950	24 13	2 130	54 10
025	0 64	193	4 90	700	17.78	1 070	27 18		
050	1 27	365	9 27	750	19 05	1 200	30 48		
125	3 18	405	10 29	855	21 72	1 675	42.55		

FIGURE 2. *Body for FHL30G fuseholder.*

See notes on other page

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Metric equivalents are for general information only, based upon 1 inch = 25.4 mm.
2. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.
3. Revision code shall be G.
4. All of the type FHL30G fuseholders submitted for delivery shall have been subjected to the dripproof test in accordance with 4.6.16.2.
5. Mounting hardware: Screws, sealing, panhead, slotted, stainless steel, 6-32UNC-2A, x 1-1/8 inch long or 6-32UNC-2A x 1-1/8 inch long with sealing washer, 2 each. Mounting hardware and gasket may be provided loose in a plastic bag or installed on the fuseholder.

REQUIREMENTS.

Dimensions and configuration: See figures 1 and 2
Body material: MAI-60 or GDI-30F in accordance with MIL-M-14
Fuse accommodation, Ferrule type:
Size: 0.250 inch diameter, 1.250 inches in length
Styles: F02 and F03 in accordance with MIL-F-15160, and FM09 in accordance with MIL-F-23419
Poles: Two
Rating: 30 amperes (see table I for voltage ratings)

TABLE I. *Fuseholder marking.*

Fuseholder marking					Resistance (ohms)	Resistance specification	Style[1]
Body part No	Revision code	Type number	Dash number	Voltage			
M19207/19-001	note 4	FHL30G	- 1	12-22	Shorting wire in place of resistor		
M19207/19-002	note 4	FHL30G	- 2	23-33	330	MIL-R-39008/2 - RCR20	
M19207/19-003	note 4	FHL30G	- 3	34-45	681	MIL-R-39007/8 - RWR80	
M19207/19-004	note 4	FHL30G	- 4	46-60	1,210	MIL-R-39007/8 - RWR80	
M19207/19-005	note 4	FHL30G	- 5	61-80	1,870	MIL-R-39007/11 - RWR89	
M19207/19-006	note 4	FHL30G	- 6	81-90	2,050	MIL-R-39007/11 - RWR89	

[1]MIL-R-39017 type RLR resistors can be used in lieu of RCR types

Panel thickness: 0.125 inch (3.18 mm) maximum
Indicating: Incandescent lamp, No. 1764, with Amber color cap
Terminals: Threaded stud type, No. 8-32UNC-2A thread. Brass, silver, or tin plate
Enclosure. Dripproof. See note 5.
Test fuses
Temperature rise: F03A125V30A in accordance with MIL-F-15160/3
Short circuit. F03A125V30A in accordance with MIL-F-15160/3
Mechanical shock: Method I in accordance with MIL-F-19207
Terminal strength: 20 pounds

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

Torque Terminals – 15 pounds-inch
Salt spray (corrosion) Test condition B
Mounting hardware:
Screw: 6-32UNC-2A, 1.125inches long (min)
Pan/round head with sealing washer or pan self-sealing.
Nut: 6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

Patent notice: The US Government has royalty-free license only under claims 3 through 6, 11, and 12 of US Patent 2,854,549 owned by McGraw Electric Company for the benefit of manufacturers of the items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0469)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.