
INCH-POUND
MIL-PRF-19207/19J
16 June 1997
SUPERSEDING
MIL-PRF-19207/19H
23 August 1991

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL30G

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

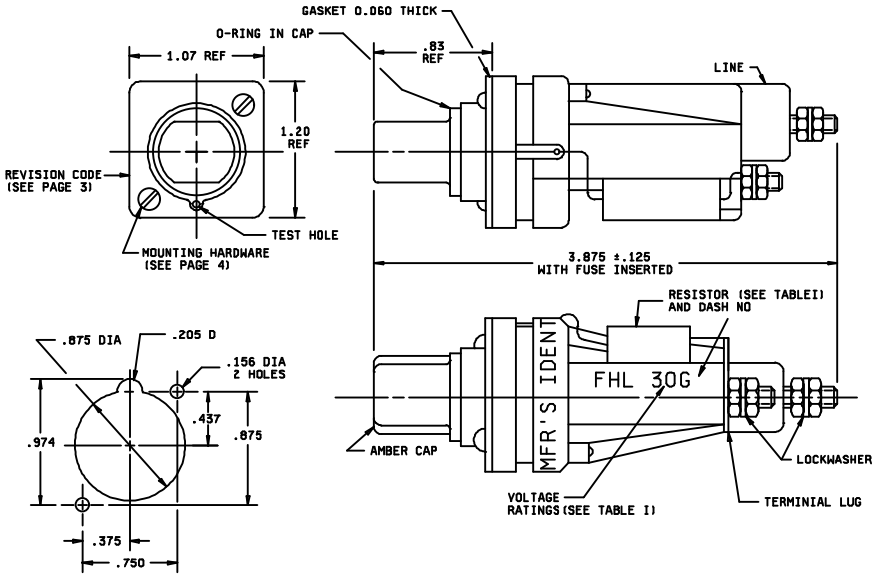

Inches	mm	Inches	mm
0.005	0.13	.750	19.05
0.060	1.52	.83	21.08
.125	3.18	.875	22.23
.156	3.96	.974	24.74
.205	5.21	1.070	27.18
.375	9.53	1.200	30.48
.437	11.10	3.875	98.43

FIGURE 1. Type FHL30G fuseholder

(J) denotes changes.


DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.
3. Revision code shall be J.
4. All of the type FHL30G fuseholders submitted for delivery shall have been subjected to the drip-proof test in accordance with MIL-PRF-19207, 4.6.16.2.
5. Mounting hardware: Screws, sealing, panhead, slotted, stainless steel or zinc plated steel, 6-32UNC-2A 1.125 inches (28.58 mm) long or 6-32UNC-2A x 1.125 inches (28.58 mm) long with sealing washer, 2 each. Mounting hardware and gasket may be provided loose in a plastic bag or installed on the fuseholder.
6. Body material: It is recommended that type MAI-60 or GDI-30F of MIL-M-14 be considered for meeting the body material requirements of this specification.
7. Marking: In addition to other required marking, the manufacturer's identification, the type designation with an appropriate dash number, and the voltage rating from table I shall appear on the fuseholder body but the location of each is optional. The military part number is not required on the fuseholder body.

FIGURE 1. Type FHL30G fuseholder - Continued.

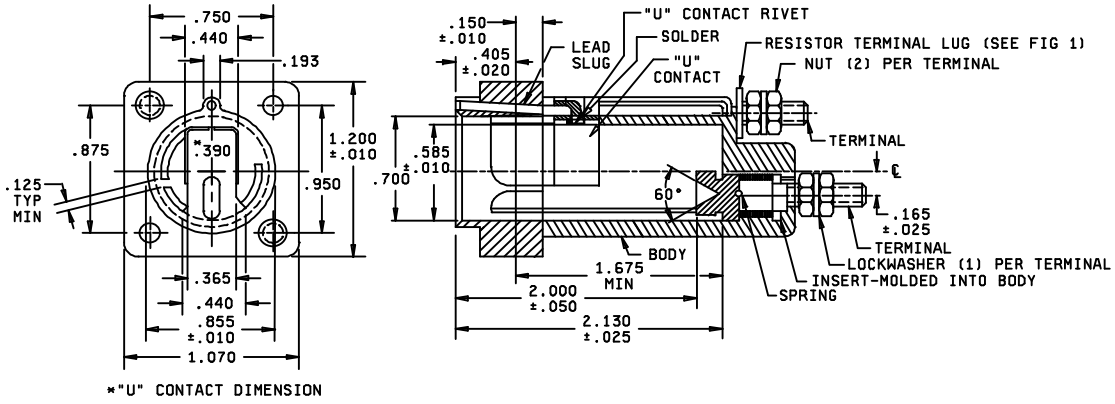

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.010	0.25	.150	3.81	.440	11.18	.875	22.23	2.000	50.80
.020	0.51	.165	4.19	.585	14.86	.950	24.13	2.130	54.10
.025	.064	.193	4.90	.700	17.78	1.070	27.18		
.505	1.27	.365	9.27	.750	19.05	1.200	30.48		
.125	3.18	.405	10.29	.855	21.72	1.675	42.55		

FIGURE 2. Body for FHL30G fuseholder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.
3. Revision code shall be J.
4. All of the type FHL30G fuseholders submitted for delivery shall have been subjected to the drip-proof test in accordance with MIL-PRF-19207, 4.6.16.2.
5. Mounting hardware: Screws, sealing, panhead, slotted, stainless steel or zinc plated steel, 6-32UNC-2A x 1.125 inches (28.58 mm) long or 6-32UNC-2A x 1.125 inches (28.58 mm) long with sealing washer, 2 each. Mounting hardware and gasket may be provided loose in a plastic bag or installed on the fuseholder.
6. Body material: It is recommended that type MAI-60 or GDI-30F of MIL-M-14 be considered for meeting the body material requirements of this specification.
7. Marking: In addition to other required marking, the manufacturer's identification, the type designation with an appropriate dash number, and the voltage rating from table I shall appear on the fuseholder body but the location of each is optional. The military part number is not required on the fuseholder body.

FIGURE 2. Body for FHL30G fuseholder - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and figure 2.

Body material: Body material shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body material is specified in the notes.

Fuse accommodation, Ferrule type:

Size: 0.250 inch (6.35 mm) diameter, 1.250 (31.75 mm) inches in length.

Styles: F02 and F03 in accordance with MIL-PRF-15160, and FM09 in accordance with MIL-PRF-23419.

Poles: One.

Rating: 30 amperes (see table I for voltage ratings).

Panel thickness: 0.125 inch (3.18 mm) maximum.

Indicating: Incandescent lamp, industry No. 1764, with Amber color cap.

Terminals: Threaded stud type, No. 8-32UNC-2A thread. Brass, silver, or tin plate.

Enclosure: Drip-proof (see note 4).

Test fuses:

Temperature rise: F03A125V30A in accordance with MIL-PRF-15160/3.

Short circuit: F03A125V30A in accordance with MIL-PRF-15160/3.

Mechanical shock: Method I in accordance with MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque: Terminals - 15 inch-pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

Salt spray (corrosion): Test condition B.

Mounting hardware:

Screw: 6-32UNC-2A, 1.125 inches (28.58 mm) long (min). Pan/round head with sealing washer or pan self-sealing.

Mounting plate: A threaded metal insert may be used in lieu of mounting plate.

Military part number: M19207/19 (dash number from table I).

Type designation: FHL30G (dash number from table I).

Patent notice: The US Government has royalty-free license only under claims 3 through 6, 11, and 12 of US Patent 2,854,549 owned by McGraw Electric Company for the benefit of manufacturers of the items called for in this specification sheet either for the Government or for use in equipment to be delivered to the Government.

TABLE I. Fuseholder marking.

Fuseholder marking			Resistance (ohms)	Resistance specification	Style 1/
MIL/type dash no	Revision code	Voltage (volts)			
-001	See figure 1, note 3	12-22	Shorting wire in place of resistor		
-002	See figure 1, note 3	23-33	330	MIL-R-39008/2	-RCR20
-003	See figure 1, note 3	34-45	681	MIL-R-39007/8	-RWR80
-004	See figure 1, note 3	46-60	1,210	MIL-R-39007/8	-RWR80
-005	See figure 1, note 3	61-80	1,870	MIL-R-39007/11	-RWR89
-006	See figure 1, note 3	81-90	2,050	MIL-R-39007/11	-RWR89

1/ MIL-PRF-39017 type RLR resistors can be used in lieu of RCR types.

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Preparing activity:
DLA - CC

(Project 5920-0516-04)

Review activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 17, 19, 70, 71, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.