NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-19207/20C
10 August 1971
SUPERSEDING
MIL-P-19207/20B
31 August 1966

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, NONINDICATING,
TYPES FHN31G1 AND FHN31G2

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fuseholders described herein shall consist of this document and the latest issue of Specification MIL-F-19207.

Inches	MM
0.004	0.11
.10	2.54
.112	2.84
.118	3.00
.446	11.34
.455	11.57
.465	11.81
.468	11.89
.47	11.94
.478	12.14
.500	12.70
.510	12.95
.56	14.22
.65	16.50
.680	17.27
.688	17.48
.690	17.53
.719	18.26
1.71	43.43
2.24	56.90
2.34	59.44

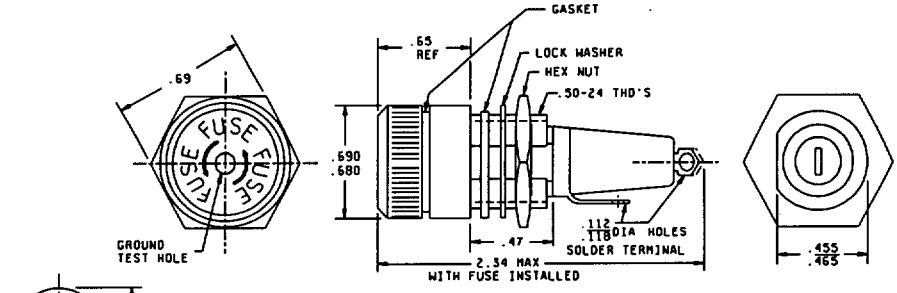


FIGURE 1. Type FHN31G1

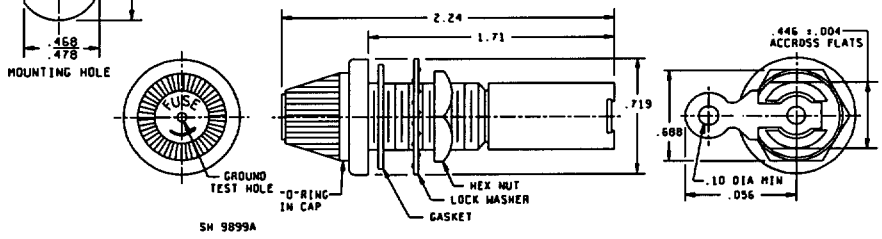


FIGURE 2. Type FHN31G2.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .xx ±.02 and .xxx ±.005.
4. Formerly type FHN31G.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.
Cap and body molding material: GDI-30F of MIL-M-19833 or SDG-F of MIL-M-14.
Gaskets and O-rings: ZZ-R-765.
Fuse accommodation.
Ferrule type:
Size. 0.250 inch diameter, 1.000 inch length.
Style F01 of MIL-F-15160/1.
Poles: One.
Rating: 5 amperes, 250 volts maximum.
Panel thickness: 0.187 inch maximum.
Nonindicating:
Lamp and series resistor: None.
Terminals: Solder lug type.
Enclosure: Dripproof.
Test fuses:
Temperature rise: F01A125V2A of MIL-F-15160/1.
Short circuit: F01A125V2A of MIL-F-15160/1.
Mechanical shock: Method II of MIL-F-19207.
Terminal strength. 5 pounds.
Torque. Mounting - 20 pounds/inch. Cap insert (FBN31G2 only) - 15 pounds/inch.
Salt spray (corrosion). Test condition B.

Custodians:
Army - EL
Navy - SH
Air Force - 80

Preparing activity:
Navy - SH
(Project 5920-0323)

Review activities:
Army - EL, MI, CR
Navy - SH, AS
Air Force - 17, 85
DSA - ES

User activities:

Navy - MC
Air Force - 14, 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.