
INCH-POUND
MIL-PRF-19207/20F
9 January 2014
SUPERSEDING
MIL-PRF-19207/20E
24 April 2007

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, NONINDICATING, TYPES FHN31G1 AND FHN31G2

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

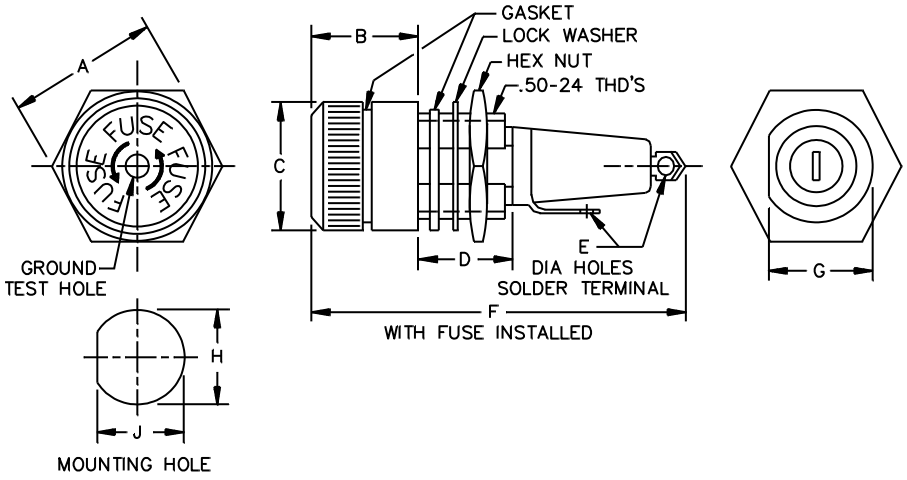


Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	.670	.710	17.02	18.03	F	---	2.340	---	59.44
B	.650 (REF)		16.51 (REF)		G	.455	.465	11.56	11.81
C	.680	.690	17.27	17.53	H	.500	.510		
D	.450	.490	11.43	12.47	J	.468	.478		
E	.112	.118	2.84	3.00					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two-place decimals and ±.005 (0.13 mm) for three-place decimals.
4. Formerly type FHN31G.

FIGURE 1. Type FHN31G1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

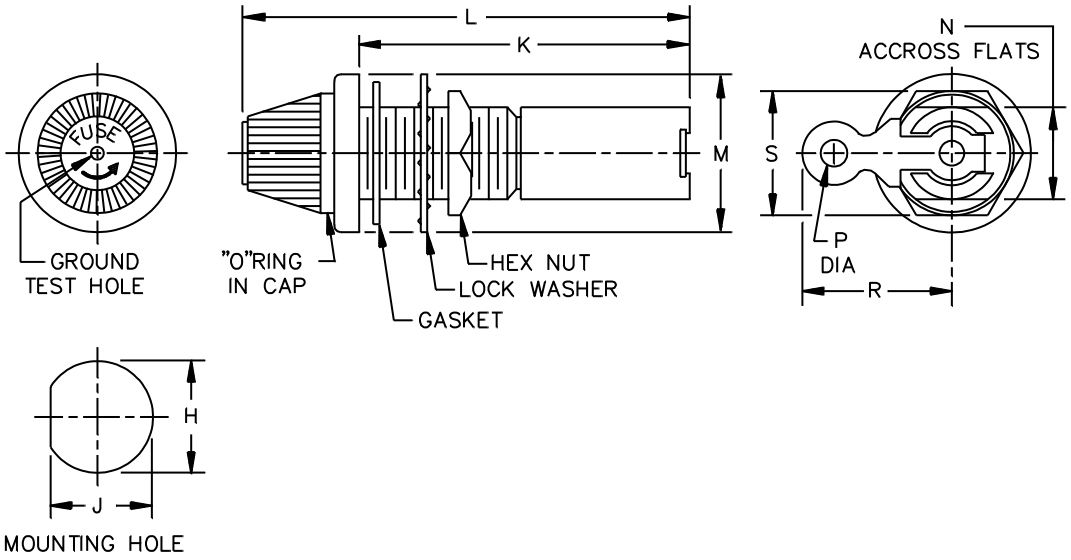

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
H	.500	.510	12.70	12.95	N	.442	.450	11.23	11.43
J	.468	.478	11.89	12.14	P	.100	---	2.54	---
K	.166	.176	4.22	4.47	R	.589	.599	14.97	15.21
L	2.22	2.26	56.39	57.40	S	.603	.693	15.32	17.60
M	.714	.724	18.14	18.39					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.02 (0.51 mm) for two-place decimals and ±.005 (0.13 mm) for three-place decimals.
4. Formerly type FHN31G.

FIGURE 2. Type FHN31G2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figures 1 and 2.

Cap and body molding material: It is suggested that type MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials ASTM-D5948 be considered for meeting the cap and body molding material requirements of this specification. ASTM-D3935 is also suggested as guidance for cap material.

Gaskets and O-rings: It is suggested that gaskets and O-rings that meet class 3 of A-A-59588 be considered for use.

Fuse accommodation:

Ferrule type:

Size: .250 inch diameter, 1.00 inch length.

Style: F01: MIL-PRF-15160/1.

(or equivalent size and style)

Poles: One.

Rating: 5 amperes, 250 volts maximum.

Panel thickness: .187 inch maximum.

Nonindicating:

Lamp and series resistor: None.

Terminals: Solder lug type.

Enclosure: Dripproof.

Test fuses:

Temperature rise: F01A125V2A of MIL-PRF-15160/1.

Short circuit: F01A125V2A of MIL-PRF-15160/1.

Mechanical shock: Method II of MIL-PRF-19207.

Terminal strength: 5 pounds.

Torque:

Mounting: 20 inch-pounds.

Cap insert (FHN31G2 only): 15 inch-pounds.

Salt spray (corrosion): Test condition B.

Part or Identifying Number (PIN): FHN31G1 or FHN31G2 depending on type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-19207, this document references the following:

MIL-PRF-15160/1 A-A-59588 ASTM-D3935 ASTM-D5948

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
Air force - 85
DLA - CC

Review Activities:
Army - CE, MI
Navy - AS, MC
Air Force - 19

Preparing Activity:
DLA - CC

(Project 5920-2013-033)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:30Z
Check the source to verify that this is the current version before use.