INCH-POUND
MIL-PRF-19207/21H
25 March 1998
SUPERSEDING
MIL-PRF-19207/21G
23 August 1991

PERFORMANCE SPECIFICATION SHEET

# FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL32W

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

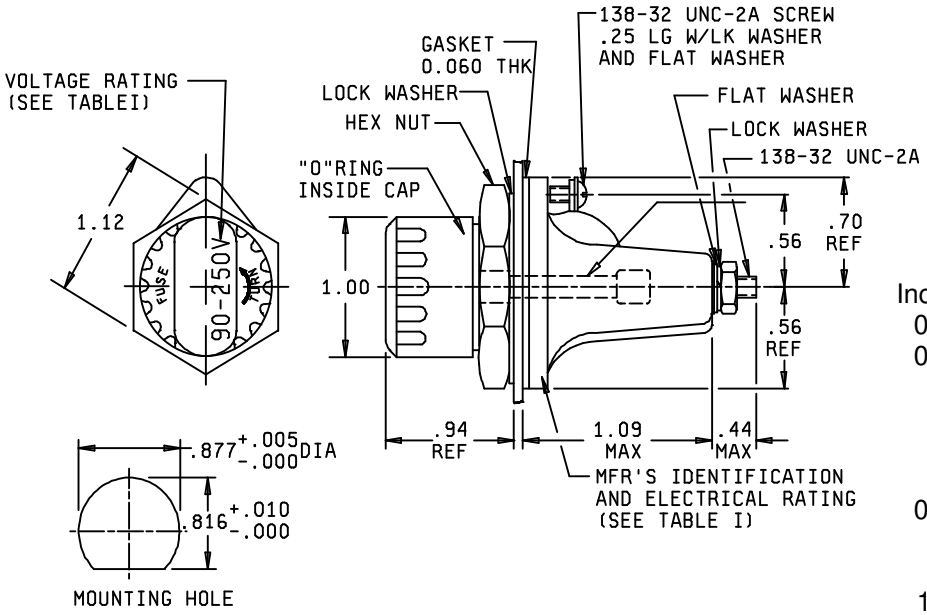


| Inches | mm |
|---|---|
| 0.005 | 0.13 |
| 0.060 | 1.52 |
| .138 | 3.51 |
| .44 | 11.16 |
| .56 | 14.22 |
| .70 | 17.78 |
| 0.816 | 20.73 |
| .877 | 22.28 |
| .94 | 23.88 |
| 1.0 | 25.4 |
| 1.09 | 27.69 |
| 1.12 | 28.45 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±0.02 (0.51 mm) for two-place decimals and ±0.005 (0.13 mm) for three-place decimals.
4. The location (on the fuseholder body) of the manufacturer's identification and electrical rating is optional.

FIGURE 1. Type FHL32W fuseholder.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Body molding material: Body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Fuse accommodation:

Ferrule type:

Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length.

Style: MIL-PRF-15160, F02 and F03 and MIL-PRF-23419, FM09.

Poles: One.

Rating: 30 amperes, voltage see table I.

Panel thickness: 0.125 inch (3.18 mm) maximum.

Indicating: See table I.

Lamp series resistor: See table I

Terminals: Threaded stud and screw type.

Enclosure: Watertight.

Test fuses:

Temperature rise: FM03A125V30A of MIL-PRF-15160/03.

Short circuit: FM03A125V15A of MIL-PRF-15160/03.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque:

Threaded terminals: 12 inch-pounds.

Mounting: 15-20 inch-pounds.

Cap insert: 15 inch-pounds.

Salt spray (corrosion): Test condition B.

Type designation FHL32W- (dash number from table I).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.

TABLE I. Voltage and resistance.

| Type designation dash no. | Voltage | Lamp indicator number 1/ | Resistance | Resistor type | Resistor specification 2/ | Cap color |
|---|---|---|---|---|---|---|
| -01 | 12-22 | 1764 | Shorting wire | N/A | N/A | Amber |
| -02 | 23-33 | 1764 | 330 | RCR07G331KM | MIL-R-39008/1 | Amber |
| -03 | 34-45 | 1764 | 680 | RCR07G681KM | MIL-R-39008/1 | Amber |
| -04 | 46-60 | 1764 | 1,200 | RCR07G1201KM | MIL-R-39008/1 | Amber |
| -05 | 61-80 | 1764 | 1,800 | RCR07G1801KM | MIL-R-39008/1 | Amber |
| -06 | 81-90 | 1764 | 2,000 | RCR07G2001KM | MIL-R-39008/1 | Amber |
| -07 | 2.5-4 | 1784 | Shorting wire | N/A | N/A | Amber |
| -08 | 5-7 | 1705 | Shorting wire | N/A | N/A | Amber |
| -09 | 8-11 | 1705 | Shorting wire | N/A | N/A | Amber |
| -10 | 1-2.4 | 2169 | Shorting wire | N/A | N/A | Amber |
| -11 | 90-250V | Neon | 120,000 | RCR07G124KM | MIL-R-39008/1 | Clear |
| -12 | 12-22 | 1764 | Shorting wire | N/A | N/A | Clear |
| -13 | 23-33 | 1764 | 330 | RCR07G331KM | MIL-R-39008/1 | Clear |
| -14 | 34-45 | 1764 | 680 | RCR07G681KM | MIL-R-39008/1 | Clear |
| -15 | 46-60 | 1764 | 1,200 | RCR07G1201KM | MIL-R-39008/1 | Clear |
| -16 | 61-80 | 1764 | 1,800 | RCR07G1801KM | MIL-R-39008/1 | Clear |
| -17 | 81-90 | 1764 | 2,000 | RCR07G2001KM | MIL-R-39008/1 | Clear |
| -18 | 2.5-4 | 1764 | Shorting wire | N/A | N/A | Clear |
| -19 | 5-7 | 1705 | Shorting wire | N/A | N/A | Clear |
| -20 | 8-11 | 1705 | Shorting wire | N/A | N/A | Clear |
| -21 | 1-2.4 | 2169 | Shorting wire | N/A | N/A | Clear |

1/ Industry number.
2/ MIL-R-39008, style RCR07 resistors are inactive for new design. MIL-PRF-39017, style RLR07 resistors may be used as a possible replacement. This is a recommended replacement not a direct substitute.

TABLE II. Supersession information.

| Superseding type designation dash number | Superseded MIL dash number | Superseding type designation dash number | Superseded MIL dash number |
|---|---|---|---|
| FHL32W-01 | M19209/21-01 | FHL32W-12 | N/A |
| FHL32W-02 | M19209/21-02 | FHL32W-13 | N/A |
| FHL32W-03 | M19209/21-03 | FHL32W-14 | N/A |
| FHL32W-04 | M19209/21-04 | FHL32W-15 | N/A |
| FHL32W-05 | M19209/21-05 | FHL32W-16 | N/A |
| FHL32W-06 | M19209/21-06 | FHL32W-17 | N/A |
| FHL32W-07 | M19209/21-07 | FHL32W-18 | N/A |
| FHL32W-08 | M19209/21-08 | FHL32W-19 | N/A |
| FHL32W-09 | M19209/21-09 | FHL32W-20 | N/A |
| FHL32W-10 | M19209/21-10 | FHL32W-21 | N/A |
| FHL32W-11 | M19209/21-11 | N/A | N/A |

NOTES:
Body molding material: It is recommended that type MAI-60 or GDI-30F of American Society For Testing and Materials (ASTM) ASTM D5948 be considered for meeting the body molding material requirements of this specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 11, 17, 70, 71, 80

Preparing activity:
DLA - CC

(Project 5920-0510)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.