INCH-POUND


MIL-PRF-19207/21M
w/AMENDMENT 2
5 May 2023
SUPERSEDING
MIL-PRF-19207/21M
w/AMENDMENT 1
14 September 2017

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, NON-EMI/RFI SHIELDED AND EMI/RFI SHIELDED, TYPE FHL32W AND TYPE FHL32WS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19207.

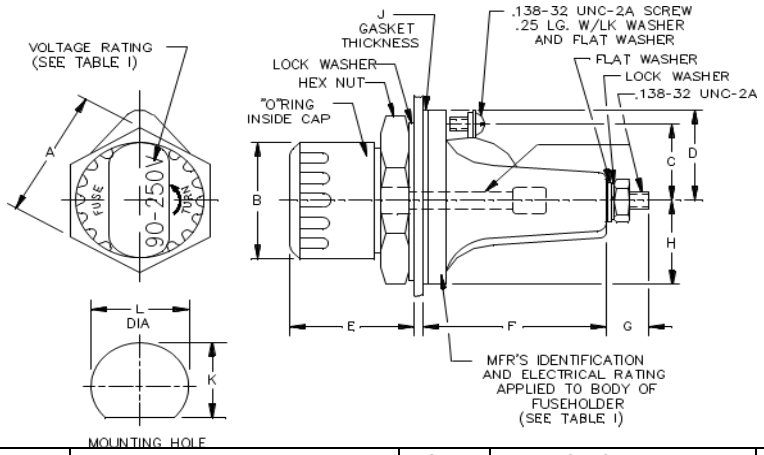

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	1.100	1.140	27.94	28.96	G	---	.440	---	11.18
B	.980	1.020	24.89	25.91	H	.560 (REF)		14.22 (REF)	
C	.540	.580	13.72	14.73	J	.055	.065	1.40	1.65
D	.700 (REF)		17.78 (REF)		K	.820	.825	20.83	20.96
E	-----	1.000	-----	25.40	L	.882	.887	22.40	22.53
F	-----	1.170	----	29.72					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±0.02 (0.51 mm) for two-place decimals and ±0.005 (0.13 mm) for three-place decimals.
4. The location (on the fuseholder body) of the manufacturer's identification and electrical rating is optional.


FIGURE 1. Type FHL32W fuseholder.

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.

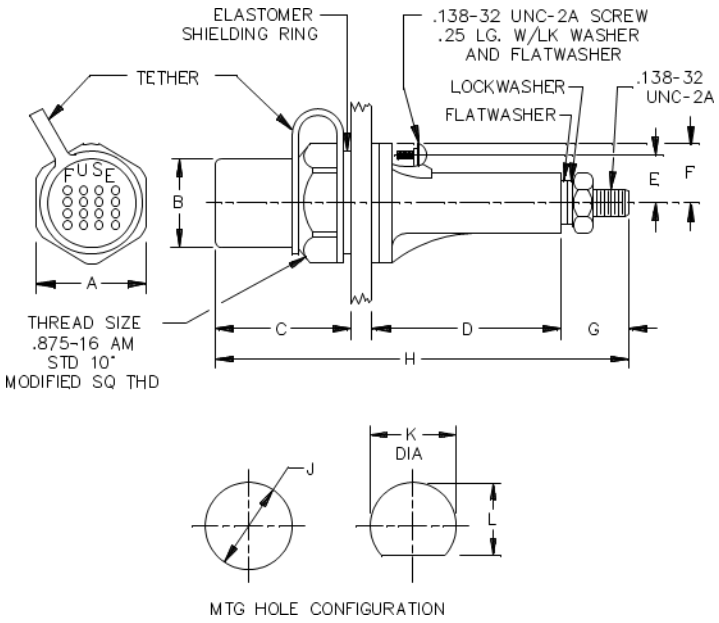

Ltr	Inches		mm		Ltr	Inches		mm	
	Min	Max	Min	Max		Min	Max	Min	Max
A	1.230	1.270	31.24	32.26	G	---	.440	---	11.18
B	1.120	1.160	28.45	29.46	H	2.780 (REF)		70.61 (REF)	
C	-----	1.100	-----	27.94	J	.882	.887	22.40	22.53
D	-----	1.170	-----	29.72	K	.882	.887	22.40	22.53
E	.540	.580	13.72	14.73	L	.820	.825	20.83	20.96
F	---	.730	---	18.54					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±0.02 (0.51 mm) for two-place decimals and ±0.005 (0.13 mm) for three-place decimals.
4. The location (on the fuseholder body) of the manufacturer's identification and electrical rating is optional.

FIGURE 2. Type FHL32WS fuseholder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figures 1 and 2.

Body molding material: Body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Fuse accommodation:

Ferrule type:

Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length.

Style: F02: MIL-PRF-15160/2, F03: MIL-PRF-15160/3 and FM09: MIL-PRF-23419/9.

Poles: One.

Rating: 30 amperes, voltage see table I.

Panel thickness: 0.125 inch (3.18 mm) maximum.

Indicating: See table I.

Lamp series resistor: See table I.

Terminals: Threaded stud and screw type.

Enclosure: Watertight (FHL32W), or watertight with EMI/RFI shielding (FHL32WS).

Test fuses:

Temperature rise: F03A125V30A of MIL-PRF-15160/3.

Short circuit: F03A125V15A of MIL-PRF-15160/3.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque:

Threaded terminals: 10 inch-pounds.

Mounting: 15-20 inch-pounds for both EMI/RFI shielded or non EMI/RFI shielded fuseholders.

Cap insert: 15 inch-pounds.

Salt spray (corrosion): MIL-STD-202-101,Test condition B.

EMI/RFI shielding: Accordance with MIL-PRF-19207.

Part or Identifying Number (PIN): Watertight FHL32W- (dash number from table I). Watertight with EMI/RFI shielding FHL32WS- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.

TABLE I. Voltage and resistance.

PIN dash no.	Voltage	Lamp indicator Number 1/	Resistance	Resistor type	Resistor specification	Cap color
-01 2/	12-22	1764	Shorting wire	N/A	N/A	Amber
-02 2/	23-33	1764	330	RLR07C 1/4 watt	MIL-PRF-39017/1	Amber
-03 2/	34-45	1764	680	RLR07C 1/4 watt	MIL-PRF-39017/1	Amber
-04 2/	46-60	1764	1,200	RLR07C 1/4 watt	MIL-PRF-39017/1	Amber
-05 2/	61-80	1764	1,800	RLR07C 1/4 watt	MIL-PRF-39017/1	Amber
-06 2/	81-90	1764	2,000	RLR07C 1/4 watt	MIL-PRF-39017/1	Amber
-07 2/	2.5-4	1784	Shorting wire	N/A	N/A	Amber
-08 2/	5-7	1705	Shorting wire	N/A	N/A	Amber
-09 2/	8-11	1705	Shorting wire	N/A	N/A	Amber
-10 2/	1-2.4	2169	Shorting wire	N/A	N/A	Amber
-11 3/	90-250	Neon	120,000	RLR07C 1/4 watt	MIL-PRF-39017/1	Clear

1/ Industry number.
2/ For a clear cap color, the designator “C” is added after the dash number.
3/ This fuseholder is only available with a clear cap color.

TABLE II. Supersession information.

Superseding PIN dash number	Superseded DESC Drawing	Superseded military part number	Superseding PIN dash number	Superseded DESC Drawing	Superseded military part number
FHL32W-01 1/	N/A	M19207/21-01	FHL32W-09 1/	N/A	M19207/21-09
FHL32WS-01	86003-01	N/A	FHL32WS-09	86003-09	N/A
FHL32W-02 1/	N/A	M19207/21-02	FHL32W-10 1/	N/A	M19207/21-10
FHL32WS-02	86003-02	N/A	FHL32WS-10	86003-10	N/A
FHL32W-03 1/	N/A	M19207/21-03	FHL32W-11 1/	N/A	M19207/21-11
FHL32WS-03	86003-03	N/A	FHL32WS-11	86003-11	N/A
FHL32W-04 1/	N/A	M19207/21-04	FHL32W-01C	N/A	FHL32W-12
FHL32WS-04	86003-04	N/A	FHL32W-02C	N/A	FHL32W-13
FHL32W-05 1/	N/A	M19207/21-05	FHL32W-03C	N/A	FHL32W-14
FHL32WS-05	86003-05	N/A	FHL32W-04C	N/A	FHL32W-15
FHL32W-06 1/	N/A	M19207/21-06	FHL32W-05C	N/A	FHL32W-16
FHL32WS-06	86003-06	N/A	FHL32W-06C	N/A	FHL32W-17
FHL32W-07 1/	N/A	M19207/21-07	FHL32W-07C	N/A	FHL32W-18
FHL32WS-07	86003-07	N/A	FHL32W-08C	N/A	FHL32W-19
FHL32W-08 1/	N/A	M19207/21-08	FHL32W-09C	N/A	FHL32W-20
FHL32WS-08	86003-08	N/A	FHL32W-10C	N/A	FHL32W-21

1/ Type designation FHL32W-XX, used prior to revision H, has been re-established and is now known as the PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.

NOTES:

1. Body molding material: It is recommended that type MAI-60 or GDI-30F of American Society For Testing and Materials ASTM-D5948 be considered for meeting the body molding material requirements of this specification.
2. EMI/RFI shielded type fuseholders are equivalent to the non-shielded type fuseholders with the addition of EMI/RFI shielding cap and mounting nut assembly.
3. To assure maximum shielding effectiveness mounting nut must be torqued to 15-20 inch-pounds over an electrically conductive panel surface, 1.26 inch minimum diameter.

Referenced documents. In addition to MIL-PRF-19207, this document references the following:

MIL-PRF-15160/2
MIL-PRF-15160/3
MIL-PRF-23419/9
MIL-PRF-39017/1
MIL-STD-202-101
ASTM-D5948

I Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - SH
Air force - 85
DLA - CC

Review Activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 70, 71

Preparing Activity:
DLA - CC

(Project 5920-2023-012)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:31Z
Check the source to verify that this is the current version before use.