NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-19207/22G
23 August 1991
SUPERSEDING
MIL-F-19207/22F
7 March 1984


PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL33W

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

Ⓖ

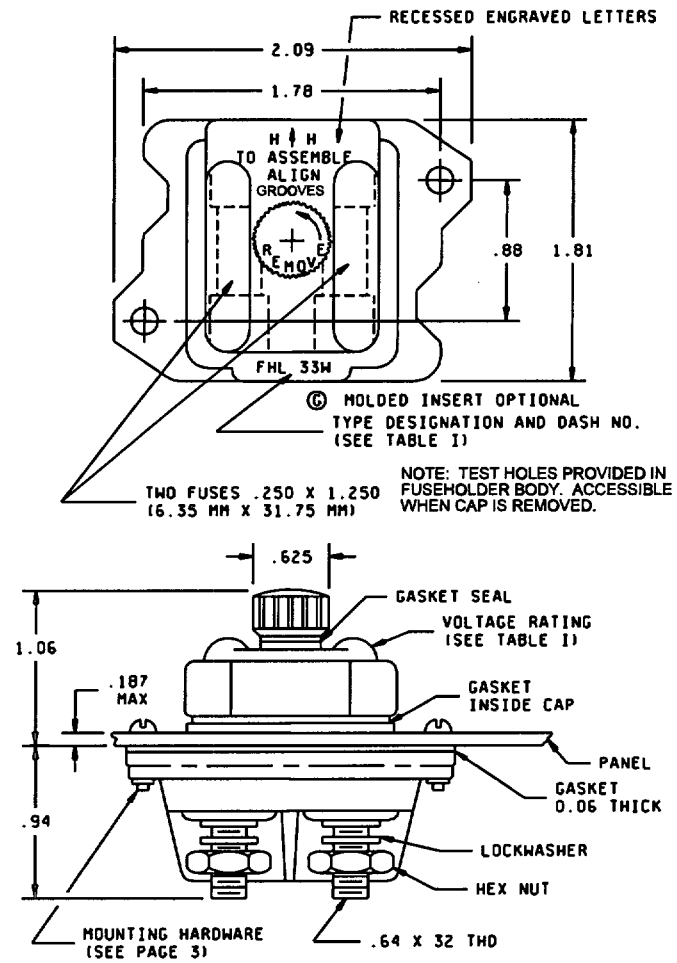


See notes on other page.

FIGURE 1. *Type FHL33W fuseholder.*

Ⓖ denotes changes.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:31Z
Check the source to verify that this is the current version before use.

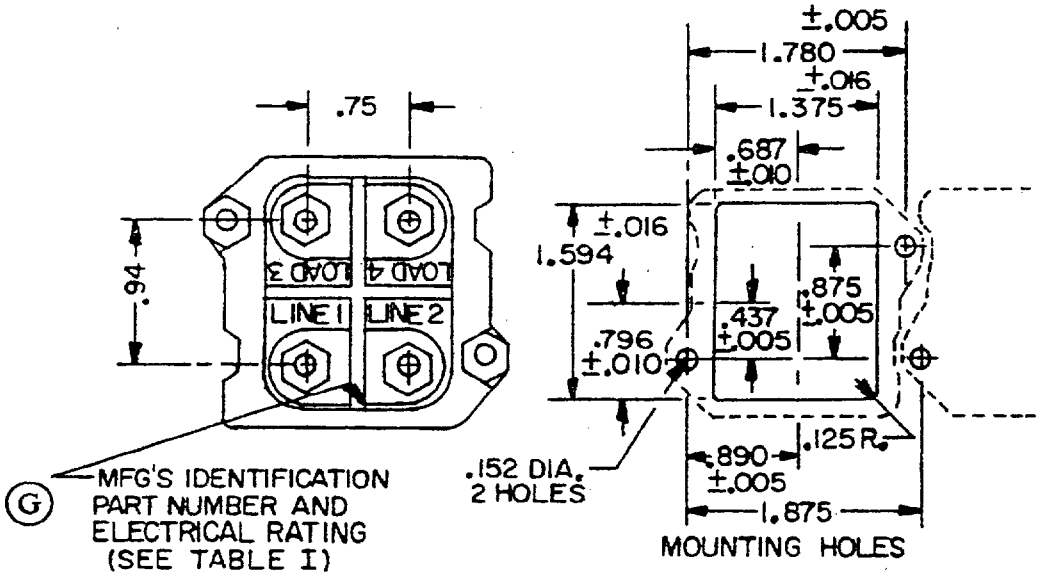

Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM
0.005	0.13	.138	3.51	.687	17.45	.890	22.61	1.81	45.97
.010	.25	.152	3.86	.75	19.05	.94	23.88	1.594	40.49
.016	.41	.164	4.17	.796	20.22	1.06	26.92	1.875	47.63
.125	3.18	.187	4.75	.875	22.23	1.375	34.93	2.00	50.8
0.060	1.52	.437	11.10	0.88	22.35	1.78	45.21	2.09	53.09

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.

FIGURE 1. *Type FHL33W fuseholder – Continued.*

REQUIREMENTS:

Dimensions and configuration: See figure 1
(G) Body molding material: MAI-60 or GDI-30F of MIL-M-14
Fuse accommodation:
(G) Ferrule type:
Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length
Style: MIL-F-15160, F02 and F03, and MIL-F-23419, FM09
Poles: Two
(G) Rating: 30 amperes, voltage. See table I
Panel thickness: 0.187 inch (4.75 mm) maximum
Indicating: One lamp, each pole. See table I
(G) Lamp series resistor: See table I

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:31Z
Check the source to verify that this is the current version before use.

Terminals: Threaded stud type
Enclosure: Watertight
Test fuses:
Temperature rise: F03A125V30A of MIL-F-15160/03
Short circuit: F03A250V15A of MIL-F-15160/03
Mechanical shock: Method I of MIL-F-19207
Terminal strength: 20 pounds
Torque: Terminals – 15 pounds-inch
Salt spray (corrosion): Test condition B
Mounting hardware:
Screw: Panhead 6-32UNC-2A with sealing washer
Nut: 6-32UNC-2B hex. A threaded metal insert may be used in lieu of nut.
Military part number: M19207/22 (dash number from table I)
Type designation: FHL33W (dash number from table I)

TABLE I. *Indication characteristics.*

(G)

MIL/TYPE Dash No.	Volt	Lamp ind. No.	Resistance	Resistor type[1]	Resistor spec.	Cap color
–01	12–22	1764	Shorting wire	–	–	Amber
–02	23–33	1764	330	RCR07G331KM	MIL-R-39008/1	Amber
–03	34–45	1764	680	RCR07G681KM	MIL-R-39008/1	Amber
–04	46–60	1764	1,200	RCR07G1201KM	MIL-R-39008/1	Amber
–05	61–80	1764	1,800	RCR07G1801KM	MIL-R-39008/1	Amber
–06	81–90	1764	2,000	RCR07G2001KM	MIL-R-39008/1	Amber
–07	2.5–4	1784	Shorting wire	–	–	Amber
–08	5–7	1705	Shorting wire	–	–	Amber
–09	8–11	1705	Shorting wire	–	–	Amber
–10	1–2.4	2169	Shorting wire	–	–	Amber
–11	90–250V	Neon	120,000	RCR07G124KM	MIL-R-39008/1	Clear

[1]MIL-R-39017 type RLR resistors can be used in lieu of RCR type.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-12)

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:31Z
Check the source to verify that this is the current version before use.