NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-19207/23H
23 August 1991
SUPERSEDING
MIL-F-19207/23G
30 December 1980


PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
BLOWN FUSE INDICATING, TYPE FHL34W

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-19207.

(H)

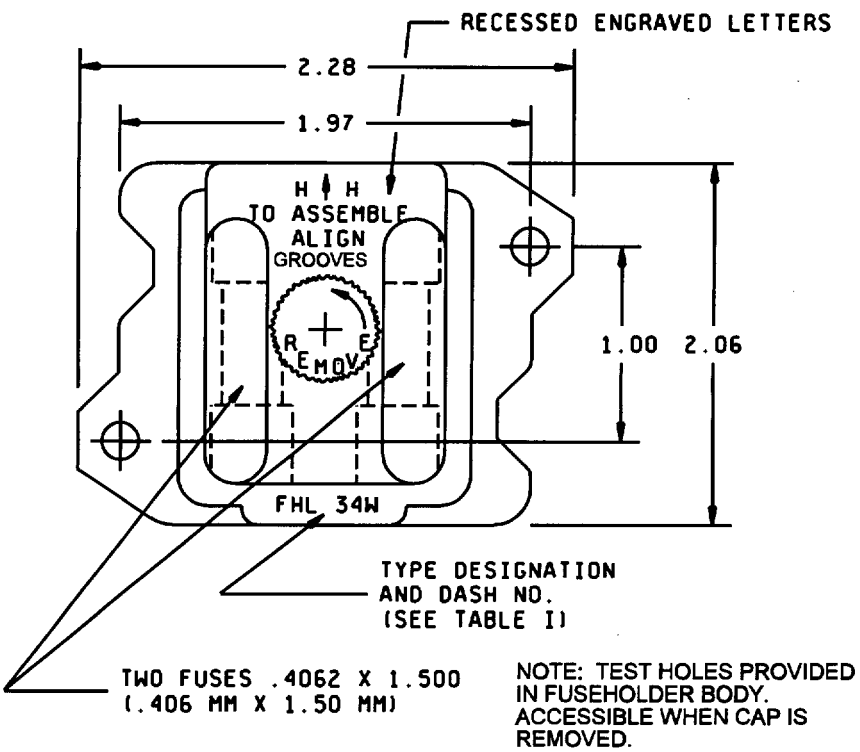

See notes on other page.


FIGURE 1. *Type FHL34W fuseholder.*

(H) denotes changes.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:32Z
Check the source to verify that this is the current version before use.

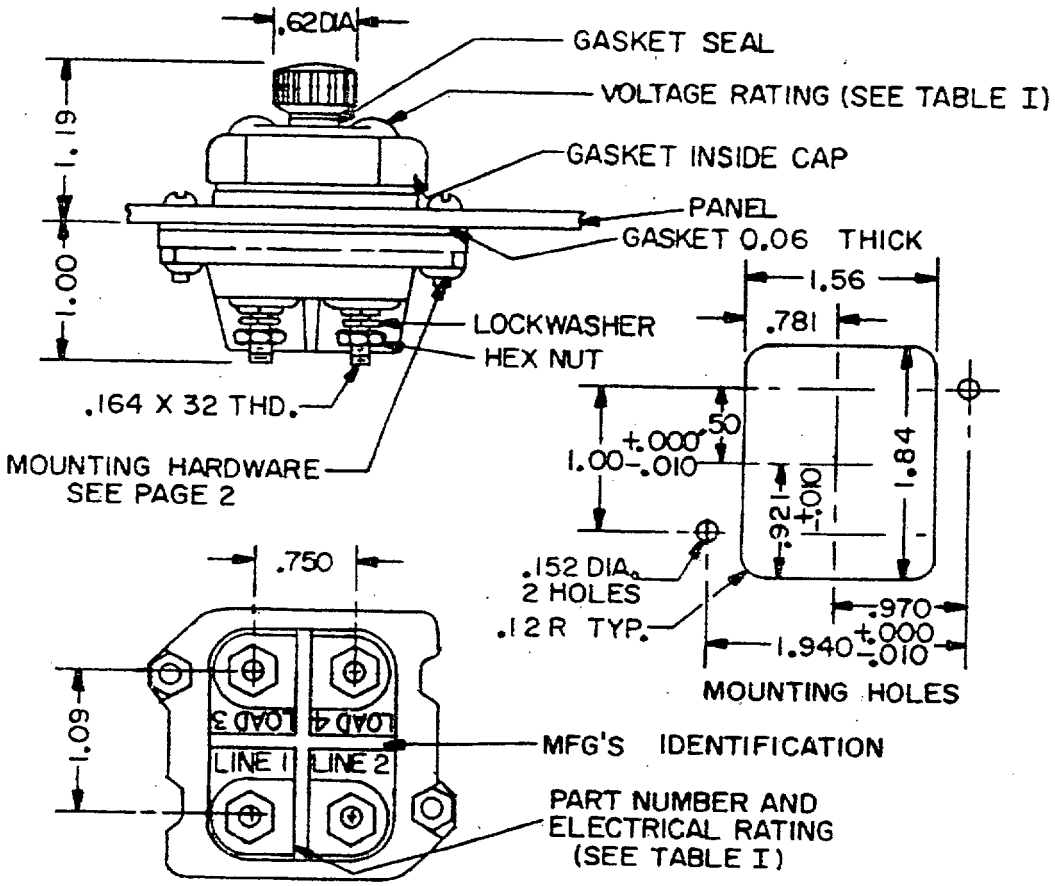

Inches	MM
0.010	0.25
.06	1.52
.12	3.05
.152	3.86
.406	10.31

Inches	MM
.164	4.17
.50	12.70
.62	15.75
.750	19.05
.781	19.84

Inches	MM
.921	23.39
.970	24.64
1.00	25.4
1.09	27.69
1.19	30.23

Inches	MM
1.500	38.10
1.56	39.62
1.84	46.74
1.940	49.28
1.97	50.04

Inches	MM
2.06	52.32
2.28	57.91

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .XX ± 0.02 and .XXX ± 0.005.

FIGURE 1. *Type FHL34W fuseholder – Continued.*

Source: https://assist.dla.mil -- Downloaded: 202640-18T12:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1

(H) Body molding material: MAI-60 or GDI-30F of MIL-M-14

Fuse accommodation:

Ferrule type:

(H) Size: 0.406 inch (10.35 mm) diameter, 1.500 inches (38.10 mm) length

Styles: MIL-F-15160, F07, F09, and F60

Poles: Two

(H) Rating: 30 amperes, voltage. See table I

Panel thickness: 0.187 inch (4.75 mm) maximum

(H) Indicating: One lamp, each pole. See table I

Lamp series resistor: See table I

Terminals: Threaded stud type

Enclosure: Watertight

Test fuses:

Temperature rise: F60C500V3A of MIL-F-15160/60

Short circuit: F60C500V30A of MIL-F-15160/60

Mechanical shock: Method I of MIL-F-19207

Terminal strength: 20 pounds

Torque: Terminals – 15 pounds-inch

Salt spray (corrosion): Test condition B

Mounting hardware:

Screw: Panhead 6-32UNC-2A with sealing washer

Nut: 6-32UNC-2B hex. A threaded metal insert may be used in lieu of nut.

Military part number: M19207/23 (dash number from table I)

Type designation FHL34W: (dash number from table I)

TABLE I. *Indication characteristics.*

(H)

MIL/TYPE Dash No.	Volt	Lamp ind. No.	Resistance	Resistor type[1]	Resistor spec.	Cap color
–01	12–22	1764	Shorting wire	–	–	Amber
–02	23–33	1764	330	RCR07G331KM	MIL-R-39008/1	Amber
–03	34–45	1764	680	RCR07G681KM	MIL-R-39008/1	Amber
–04	46–60	1764	1,200	RCR07G2301KM	MIL-R-39008/1	Amber
–05	61–80	1764	1,800	RCR07G1801KM	MIL-R-39008/1	Amber
–06	81–90	1764	2,000	RCR07G2001KM	MIL-R-39008/1	Amber
–07	2.5–4	1784	Shorting wire	–	–	Amber
–08	5–7	1705	Shorting wire	–	–	Amber
–09	8–11	1705	Shorting wire	–	–	Amber
–10	1–2.4	2169	Shorting wire	–	–	Amber
–11	90–250V	Neon	330,000	RLR20C334GR	MIL-R-39017/2	Clear
–12	90–500V	Neon	330,000	RLR20C334GR	MIL-R-39017/2	Clear

[1] MIL-R-39017 type RLR resistors can be used in lieu of RCR type.

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:32Z
Check the source to verify that this is the current version before use.

Custodians:
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, ME, AR
Navy – OS, EC
Air Force – 11, 17, 70, 71, 80, 82, 84

User activities:
Army – AT
Navy – AS, MC
Air Force – 19, 99

Preparing activity:
Navy – SH
(Project 5920-0459-13)

Source: https://assist.dla.mil -- Downloaded: 202610-18T12:32Z
Check the source to verify that this is the current version before use.