INCH-POUND
MIL-PRF-19207/24H
25 March 1998
SUPERSEDING
MIL-PRF-19207/24G
23 August 1991

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL35W

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

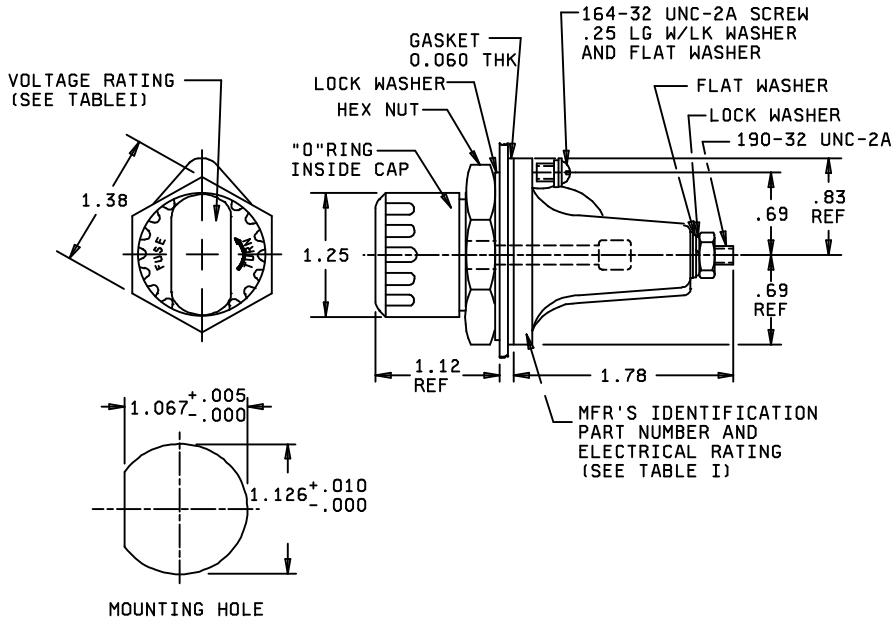

Inches	mm
0.005	0.13
0.010	0.25
0.060	1.52
.164	4.17
.190	4.83
.25	6.35
.69	17.53
.83	21.08
1.067	27.10
1.12	28.44
1.126	28.60
1.25	31.75
1.38	35.05
1.78	45.21

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±0.02 (0.51 mm) for two-place decimals and ±0.005 (0.13 mm) for three-place decimals.
4. The location (on the fuseholder body) of the manufacturer's identification and electrical rating is optional.

FIGURE 1. Type FHL35W fuseholder.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Body molding material: Body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on body molding material are specified in the notes.

Fuse accommodation:

Ferrule type:

Size: 0.460 inch (25.4 mm) diameter, 1.500 inches (38.10 mm) length.

Style: MIL-PRF-15160, F02 and F03 and MIL-PRF-23419, FM09.

Poles: One.

Rating: 30 amperes, voltage see table I.

Panel thickness: 0.125 inch (3.18 mm) maximum.

Indicating: See table I.

Lamp series resistor: See table I

Terminals: Threaded stud and screw type.

Enclosure: Watertight.

Test fuses:

Temperature rise: F60C500V30A of MIL-PRF-15160/60.

Short circuit: F60C500V30A of MIL-PRF-15160/60.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque:

Threaded terminals: 25 inch-pounds.

Mounting: 15-20 inch-pounds.

Cap insert: 15 inch-pounds.

Salt spray (corrosion): Test condition B.

Type designation FHL35W- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:32Z
Check the source to verify that this is the current version before use.

TABLE I. Voltage and resistance.

Type designation dash no.	Voltage	Lamp indicator number 1/	Resistance	Resistor type	Resistor specification	Cap color
-01	12-22	1764	Shorting wire	N/A	N/A	Amber
-02	23-33	1764	330	RCR07G331KM	MIL-R-39008/1 2/	Amber
-03	34-45	1764	680	RCR07G681KM	MIL-R-39008/1 2/	Amber
-04	46-60	1764	1,200	RCR07G2301KM	MIL-R-39008/1 2/	Amber
-05	61-80	1764	1,800	RCR07G1801KM	MIL-R-39008/1 2/	Amber
-06	81-90	1764	2,000	RCR07G2001KM	MIL-R-39008/1 2/	Amber
-07	2.5-4	1784	Shorting wire	N/A	N/A	Amber
-08	5-7	1705	Shorting wire	N/A	N/A	Amber
-09	8-11	1705	Shorting wire	N/A	N/A	Amber
-10	1-2.4	2169	Shorting wire	N/A	N/A	Amber
-11	90-250V	Neon	330,000	RLR20C334GR	MIL-R-39017/2	Clear
-12	90-250V	Neon	330,000	RLR20C334GR	MIL-R-39017/2	Clear
-13	12-22	1764	Shorting wire	N/A	N/A	Clear
-14	23-33	1764	330	RCR07G331KM	MIL-R-39008/1 2/	Clear
-15	34-45	1764	680	RCR07G681KM	MIL-R-39008/1 2/	Clear
-16	46-60	1764	1,200	RCR07G2301KM	MIL-R-39008/1 2/	Clear
-17	61-80	1764	1,800	RCR07G1801KM	MIL-R-39008/1 2/	Clear
-18	81-90	1764	2,000	RCR07G2001KM	MIL-R-39008/1 2/	Clear
-19	2.5-4	1784	Shorting wire	N/A	N/A	Clear
-20	5-7	1705	Shorting wire	N/A	N/A	Clear
-21	8-11	1705	Shorting wire	N/A	N/A	Clear
-22	1-2.4	2169	Shorting wire	N/A	N/A	Clear

1/ Industry number.
2/ MIL-R-39008, style RCR07 resistors are inactive for new design. MIL-PRF-39017, style RLR07 resistors may be used as a possible replacement. This is a recommended replacement not a direct substitute.

TABLE II. Supersession information.

Superseding type designation dash number	Superseded MIL dash number	Superseding type designation dash number	Superseded MIL dash number
FHL34W-01	M19207/24-01	FHL34W-12	M19207/24-12
FHL34W-02	M19207/24-02	FHL34W-13	N/A
FHL34W-03	M19207/24-03	FHL34W-14	N/A
FHL34W-04	M19207/24-04	FHL34W-15	N/A
FHL34W-05	M19207/24-05	FHL34W-16	N/A
FHL34W-06	M19207/24-06	FHL34W-17	N/A
FHL34W-07	M19207/24-07	FHL34W-18	N/A
FHL34W-08	M19207/24-08	FHL34W-19	N/A
FHL34W-09	M19207/24-09	FHL34W-20	N/A
FHL34W-10	M19207/24-10	FHL34W-21	N/A
FHL34W-11	M19207/24-11	FHL34W-22	N/A

NOTES:

Body molding material: It is recommended that type MAI-60 or GDI-30F of American Society For Testing and Materials (ASTM) ASTM D5948 be considered for meeting the body molding material requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:32Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 11, 17, 70, 71, 80

Preparing activity:
DLA - CC

(Project 5920-0511)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T12:32Z
Check the source to verify that this is the current version before use.