MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

RELAY, DPDT, POWER, KEY CODE NPM

This amendment forms a part of Military Specification MIL-M-28787/38B(EC), dated 14 November 1978, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Bottom of page: Delete "FSC MISC" and substitute "FSC 5963".

PAGE 4

3.5.8, second line: Delete "M28787/38" and substitute "M28787/38-1".

4.3, delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 9

Add new paragraph 6.3 as follows:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/38 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2658734. Part number M28787/38-1 supersedes part numbers 2658734 and M28787/38."

PAGE 13

FIGURE 5: Delete and substitute new figure 5 as printed on page 2 of this amendment.

Agent:
DLA-ES

Preparing activity:
Navy - EC

(Project 5963-N409)

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:37Z
Check the source to verify that this is the current version before use.

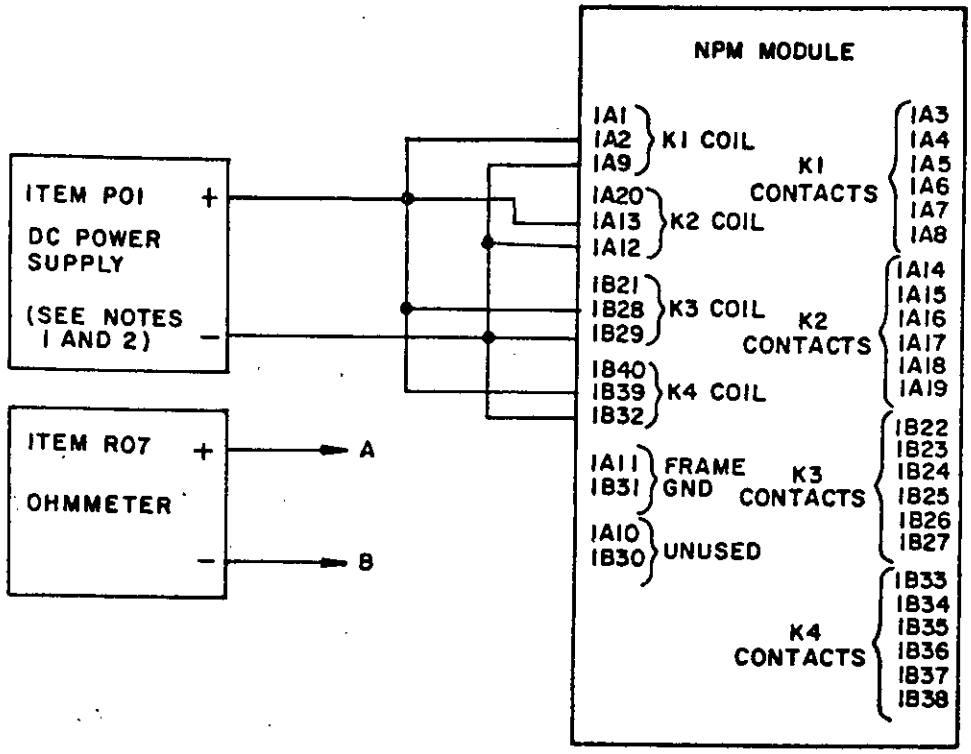

NOTES:
1. For measurement of test conditions B1-B8, item P01 shall be adjusted to 0.8 ±0.1 Vdc.
2. For measurement of test conditions B9-B16, item P01 shall be adjusted to 4.5 ±0.1 Vdc.

FIGURE 5. Open contact resistance test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:37Z
Check the source to verify that this is the current version before use.